




E10

TORO E10

Performance Curves

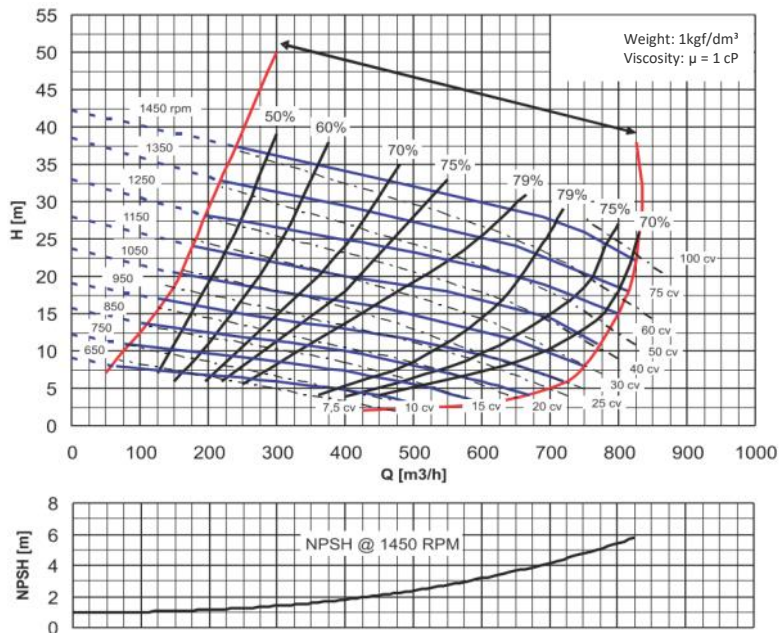


Specification

Maximum flow	820 m ³ /h
Maximum head pressure	37 m
Maximum speed	1450 rpm
Weight	608 kg
GD ²	4 (kg m ²)
Solid diameter	3"
Suction flange diameter	10" BSP
Discharge flange diameter	10" BSP
Rotor diameter	14 1/4"
Drain Connections Diameter	2" BSP

Priming Height

650 rpm - 2.1m	1150 rpm - 5.5m
750 rpm - 3.3m	1250 rpm - 5.8m
850 rpm - 4.2m	1350 rpm - 6.7m
950 rpm - 5.2m	1450 rpm - 6.7m
1050 rpm - 5.5m	

Cutaway View

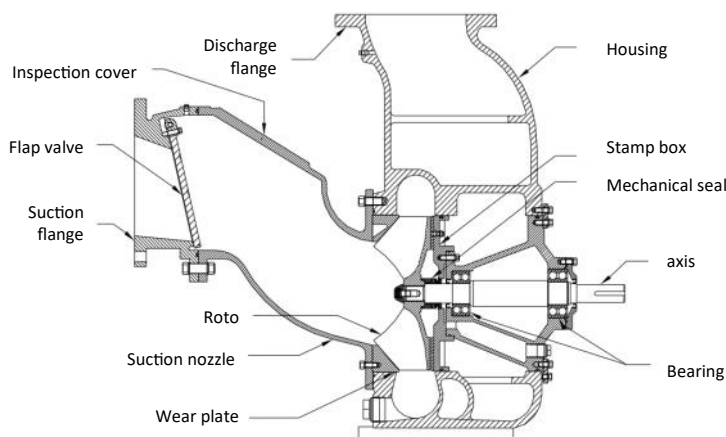

About TORO

Toro E self-priming pumps are the result of listening to our customers. Used on numerous projects around the world, they meet the demand for a self-priming pump with the same level of service and support as other Intrax products. Toro E is the ideal robust solution for a wide range of industries, highlighting conventional and lithium mining, chemical and petrochemical, among others. Available in a series of state-of-the-art coatings, they provide a finish resistant to abrasion and corrosion, guaranteeing the correct operation with dirty fluids or with suspended particles.

Dimension

