




EI 1/2

TORO EI 1/2

Performance Curves

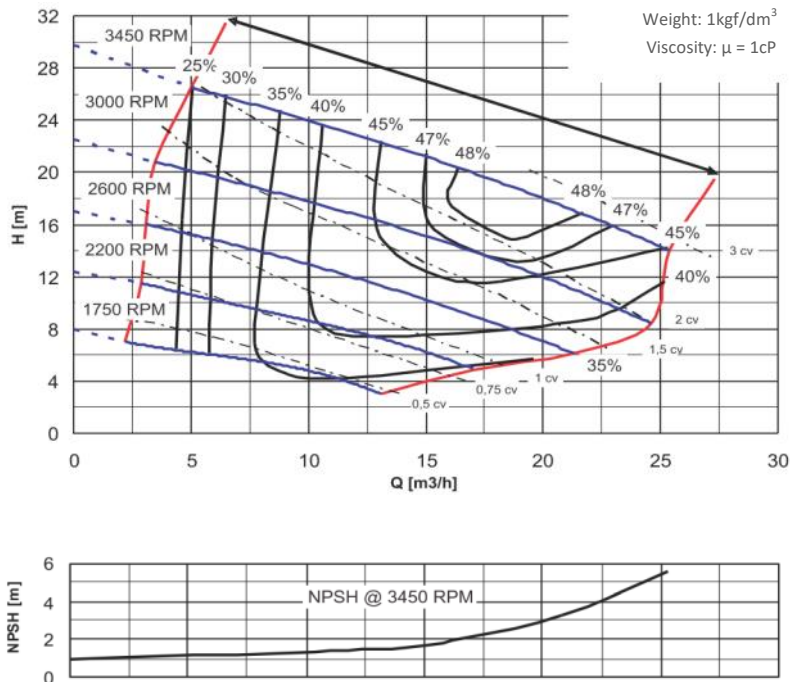


Specification

Maximum flow rate	25 m ³ /h
Maximum height pressure	26 m
Maximum speed	3450 rpm
Weight	37 kg
GD ²	0.1 (kg m ²)
Maximum diameter of solids	1"
Suction flange diameter	1 1/2" BSP
Discharge flange diameter	1 1/2" BSP
Rotor diameter	4 3/4"
Diameter of drain connections	3/8" BSP

Priming Height

1250 rpm	3.9 m
2200 rpm	5.5 m
2600 rpm	6.1 m
3000 rpm	6.4 m
3450 rpm	6.7 m

Cutaway View

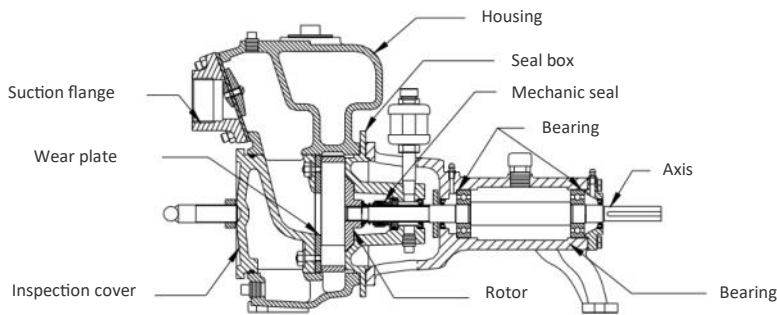

About TORO

Toro E self-priming pumps are the result of listening to our customers. Used on numerous projects around the world, they meet the demand for a self-priming pump with the same level of service and support as other Intrax products. Toro E is the ideal robust solution for a wide range of industries, highlighting conventional and lithium mining, chemical and petrochemical, among others. Available in a series of state-of-the-art coatings, they provide a finish resistant to abrasion and corrosion, guaranteeing the correct operation with dirty fluids or with suspended particles.

Dimension

