







intraxglobal.com

TORO E2

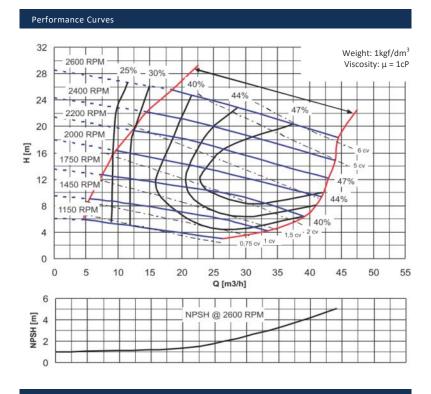

Cutaway View

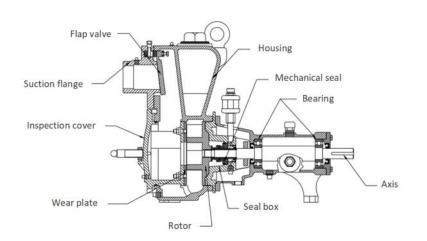

Specification

Maximum flow rate	44m³/h
Maximum height pressure	25m
Maximum speed	2600 rpm
Weight	58 kg
GD ²	0.17 (kg m²)
Maximum diameter of solids	1 1/2"
Suction flange diameter	2" BSP
Discharge flange diameter	2" BSP
Rotor diameter	6 1/4"
Diameter of drain connections	3/8" BSP


Priming Height


1150 rpm	2.1m
1450 rpm	4m
1750 rpm	5.5m
2000 rpm	6.1m
2200 rpm	7m
2400 rpm	7.3m
2600 rpm	7.6m


About TORO

Toro E self-priming pumps are the result of listening to our customers. Used on numerous projects around the world, they meet the demand for a self-priming pump with the same level of service and support as other Intrax products. Toro E is the ideal robust solution for a wide range of industries, highlighting conventional and lithium mining, chemical and petrochemical, among others. Available in a series of state-of-the-art coatings, they provide a finish resistant to abrasion and corrosion, guaranteeing the correct operation with dirty fluids or with suspended particles.

Dimension







TORO, like Atlantic Pumps, is part of the Intrax Global Group. For all enquiries, please contact Atlantic Pumps. T: +44 (0)800 118 2500 E: info@atlanticpumps.co.uk W: atlanticpumps.co.uk Atlantic Pumps Ltd is a Limited Company registered in England no. 09400148. Registered Office: Atlantic Pumps, Unit 21 Prospect House, Colliery Close, Staveley, Derbyshire, United Kingdom, S43 3QE.