





EP6

TORO EP6


Performance Curves

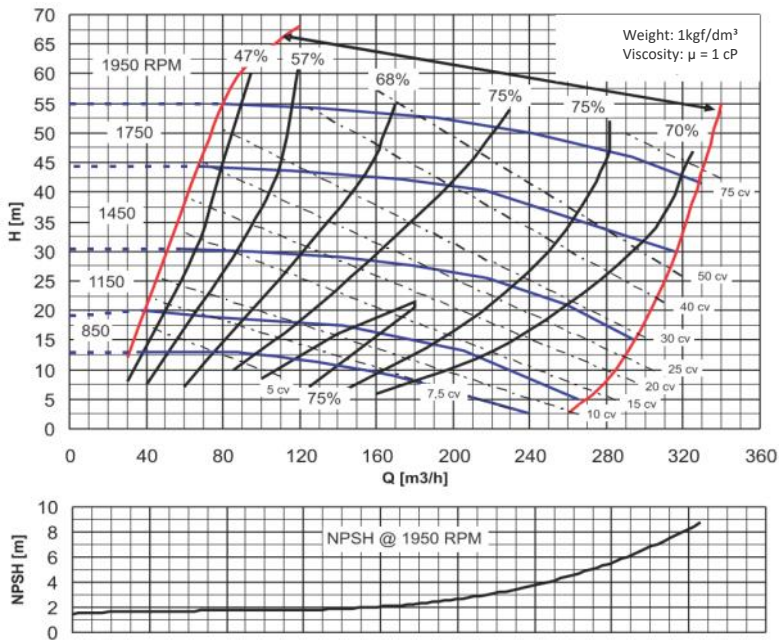

Cutaway View

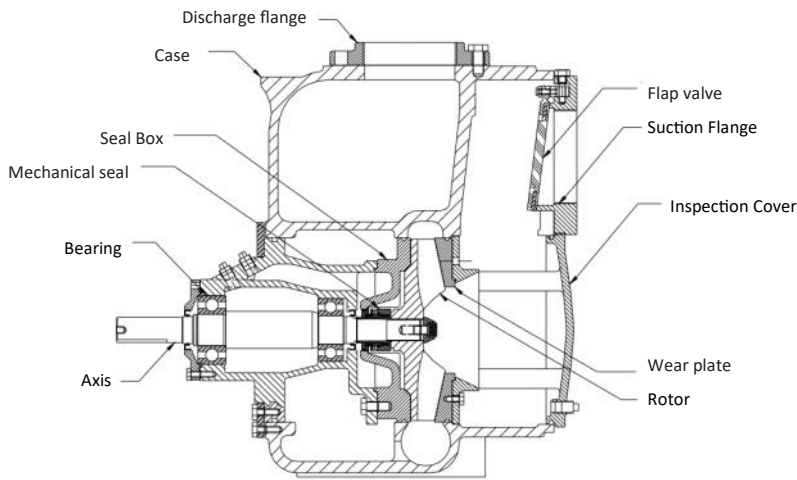

Dimension

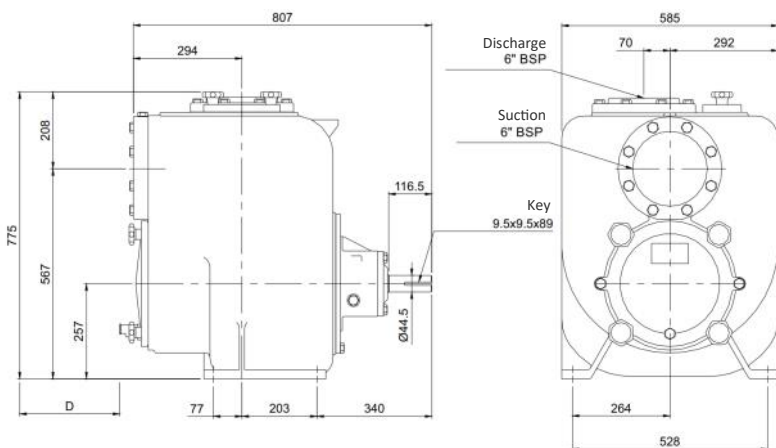

Specification

Maximum flow	330 m ³ /h
Maximum head pressure	55 m
Maximum speed	1950 rpm
Weight	445 kg
GD ²	2.2 (kg m ²)
Solid diameter	1"
Suction flange diameter	6" BSP
Discharge flange diameter	6" BSP
Rotor diameter	12 1/2"
Drain Connections Diameter	1" BSP

Priming Height

850 rpm - 2.4m
1150 rpm - 3m
1450 rpm - 4.2m
1750 rpm - 4.5m
1950 rpm - 4.5m

About TORO

Toro E self-priming pumps are the result of listening to our customers. Used on numerous projects around the world, they meet the demand for a self-priming pump with the same level of service and support as other Intrax products. Toro E is the ideal robust solution for a wide range of industries, highlighting conventional and lithium mining, chemical and petrochemical, among others. Available in a series of state-of-the-art coatings, they provide a finish resistant to abrasion and corrosion, guaranteeing the correct operation with dirty fluids or with suspended particles.