

PolaNt* MC

High-precision multi-frequency GNSS antenna



KEY FEATURES

- ▶ **Multi-constellation, multi-frequency GPS, Galileo, GLONASS and BeiDou signals capable**
- ▶ **Reception of Inmarsat L-Band signals compatible with SECORX, Veripos and Fugro correction services**
- ▶ **Ruggedized design**

The PolaNt* MC is a lightweight, sturdy, high precision, multi-frequency, multi-constellation antenna. Built into a rugged and environmentally sealed housing with aluminium bottom plate, it is ideal for in physically demanding applications, such as agriculture, construction and marine.

The PolaNt* MC allows for the reception of augmentation services distributed via L-band, making it particularly suited for use in marine application in combination with Septentrio AsteRx products.



Marine



Precision Agriculture



Mining



Construction



Automation

PolaNt* MC

FEATURES

Signals

L-Band (MSS)	
GPS	L1, L2, L5
GLONASS	L1, L2, L3
Beidou	B1, B2
Galileo	E1, E5a, E5b
SBAS	L1, L5
IRNSS	L5
QZSS	L1, L2, L5

Frequencies

1525-1610 MHz
1160-1252 MHz

Polarisation

RHCP

Axial Ratio

3 dB Max

Radiation Coverage




Zenith	6.0 dBiC
15° elevation	-2.0 dBiC
10° elevation	-3.0 dBiC
5° elevation	-4.0 dBiC
Horizon	-5.0 dBiC

Amplifier

Gain	39 ± 2 dB
Noise Figure	2.6 dB max
Input Voltage	+3 to +15 VDC
Current	65 m A (typ)
Impedance	50 Ω
VSWR	$\leq 2.0:1$

Physical and Environmental

Finish	White radome with black aluminium base
Weight	≈ 500 g / 1.1 lb
Diameter	146 mm / 5.74 in
Connector	TNC Female
Temperature	-50° C to +85° C 67° F to 185° F
Designed to	D0160D
Certification	CE, RoHS and WEEE

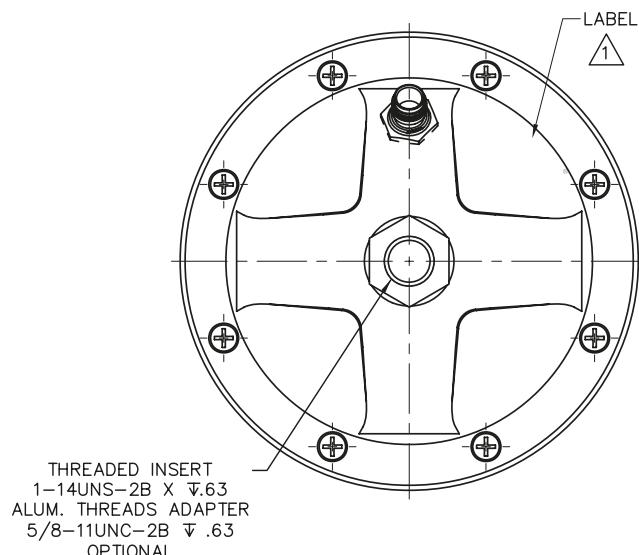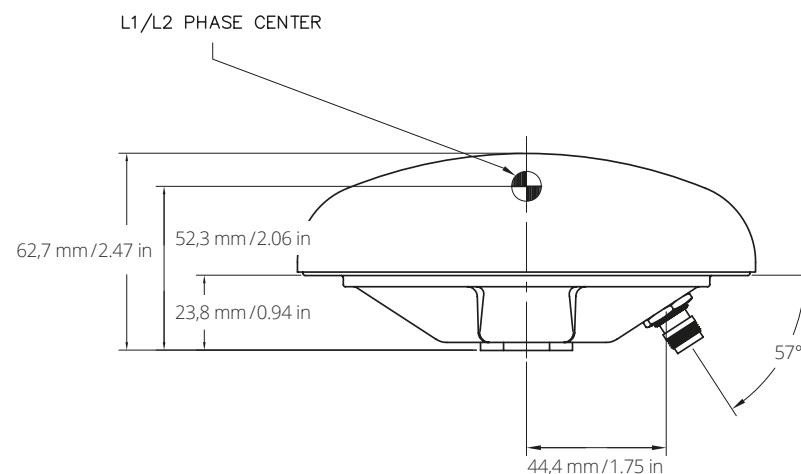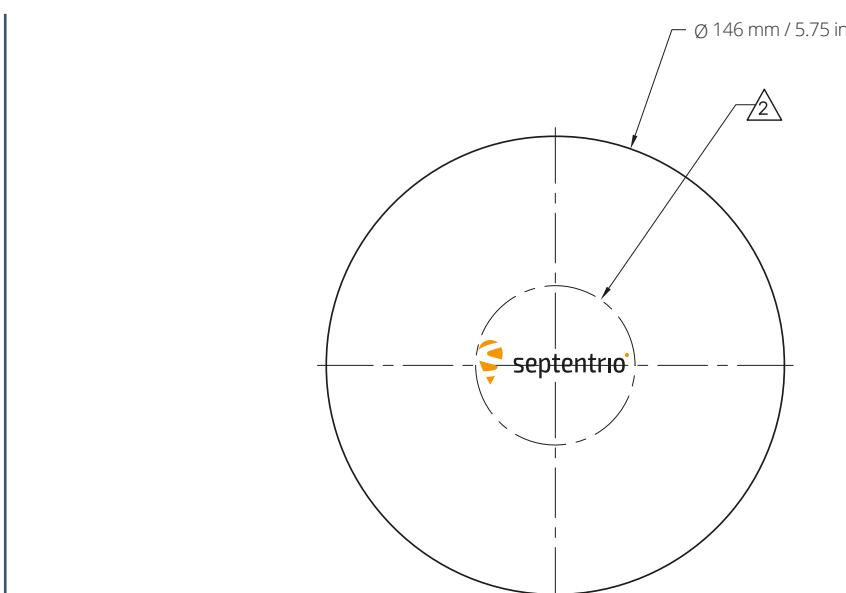

THREADED INSERT
1-14UNS-2B X 1/2-20
ALUM. THREADS ADAPTER
5/8-11UNC-2B 1/2-20
OPTIONAL

EMEA (HQ)

Greenhill Campus
Interleuvenlaan 15i
3001 Leuven, Belgium
+32 16 30 08 00

Americas

Los Angeles, CA, USA

Asia-Pacific

Melbourne, Australia
Shanghai, China
Yokohama, Japan