


VeraPhase® 6000

High Precision Full GNSS Spectrum Antenna

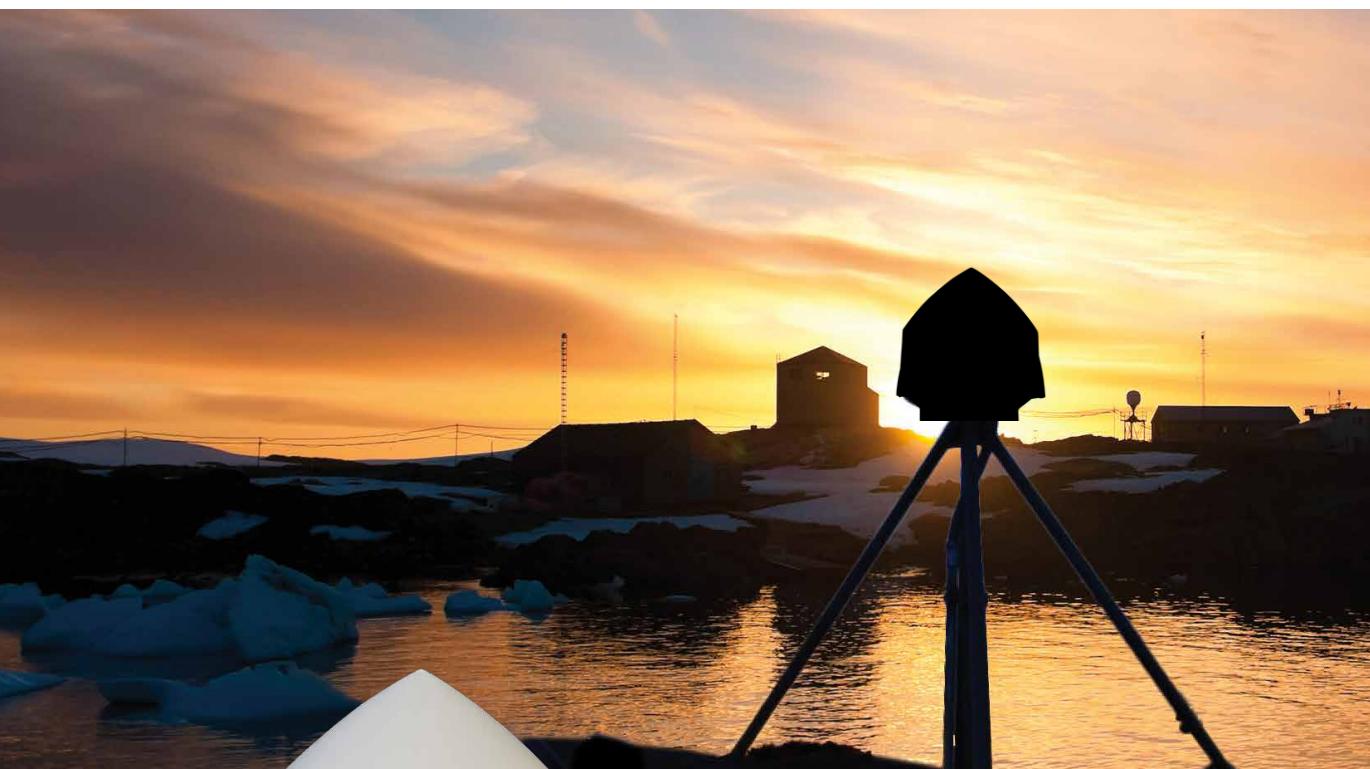

KEY FEATURES

- ▶ **Low axial ratios from horizon to horizon**
- ▶ **Very Tight Phase Center Variation**
($<1 \text{ mm} / 0.03 \text{ in}$)
- ▶ **Low current (45mA)**
- ▶ **Invariant performance from: +2.7 to 24 VDC**

The patented VeraPhase® 6000 antenna, powered by Tallysman, is a full GNSS spectrum antenna including L-band for correction services. It has consistent performance (gain, axial ratio, PCV, and PCO) across the full bandwidth. It provides the lowest axial ratios (horizon to horizon, over all azimuths) across all GNSS frequencies.

BENEFITS

- Consistent performance across all frequencies
- Broadest tracking elevation ($0^\circ - 180^\circ$)
- Extreme precision
- Excellent multipath rejection
- IP 67, REACH, RoHS, WEEE compliant

VeraPhase® 6000

FEATURES

GNSS Frequencies

L-Band (MSS)	L1, L2, L5 L1, L2, L3 E1, E5a, E5b, E6 B1, B2, B3 L1, L5 L5 L1, L2, L5, L6
--------------	--

Polarisation

RHCP

Axial Ratio

< 0.5 db at zenith

Radiation Coverage (dBiC)

	L1	L2
Zenith	6.7	5.8
15° elevation	-3.5	-1.7
10° elevation	-4.3	-2.6
5° elevation	-5.5	-3.5
Horizon	-6.6	-4.4

LNA

Gain variation with temp. 3dB max over operational temperature range

LNA gain flatness 1.5 dB over frequency range (typ)

P1dB output +12 dBm

Bandwidth 1164 - 1254 MHz

LNA noise figure 1559 - 1610 MHz

VSWR (at LNA output) 2.5 dB typ. at 25 °C

Supply voltage range <1.5:1 max.

Supply current +2.7 to 24 VDC nominal

<35 mA (35 dB), <45 mA (50 dB)

Out of band rejection <800 MHz >60 dB

<950 MHz 60 dB

<1100 MHz 60 dB

>1450 MHz 60 dB

<1536 MHz 50 dB

>1650 MHz 50 dB

>1800 MHz >60 dB

Group delay variation 1164-1300 MHz 7ns (max)

1559-1610 MHz 15ns (max)

Antenna

Antenna Gain 5 dBiC to 7 dBiC (all frequencies)

Efficiency >70%

Phase centre variation ± 1 mm / 0.04 in

Phase centre offset (RMS) ± 0.2 mm / 0.008 in

IGS reference TWIVP6050_CONE

Mechanicals & Environmental

Antenna Reference Plane (ARP) Bottom of 5/8" thread

North orientation indicator Mark on radome above connector

Operating temperature range -40° C to +85° C

-40° F to +185° F

Weight 820 g / 1.8 lb

Mounting thread 5/8" x 11 TPI female

Connector TNC Female

Certification IP 67, RoHS, WEEE, REACH, CE

vertical axis: 50 G


other axes: 30 G

Shock MIL STD 810D

Vibration

Performance Measured @ Vcc = 3V, and Temperature=25° C / 77° F

DIMENSIONS

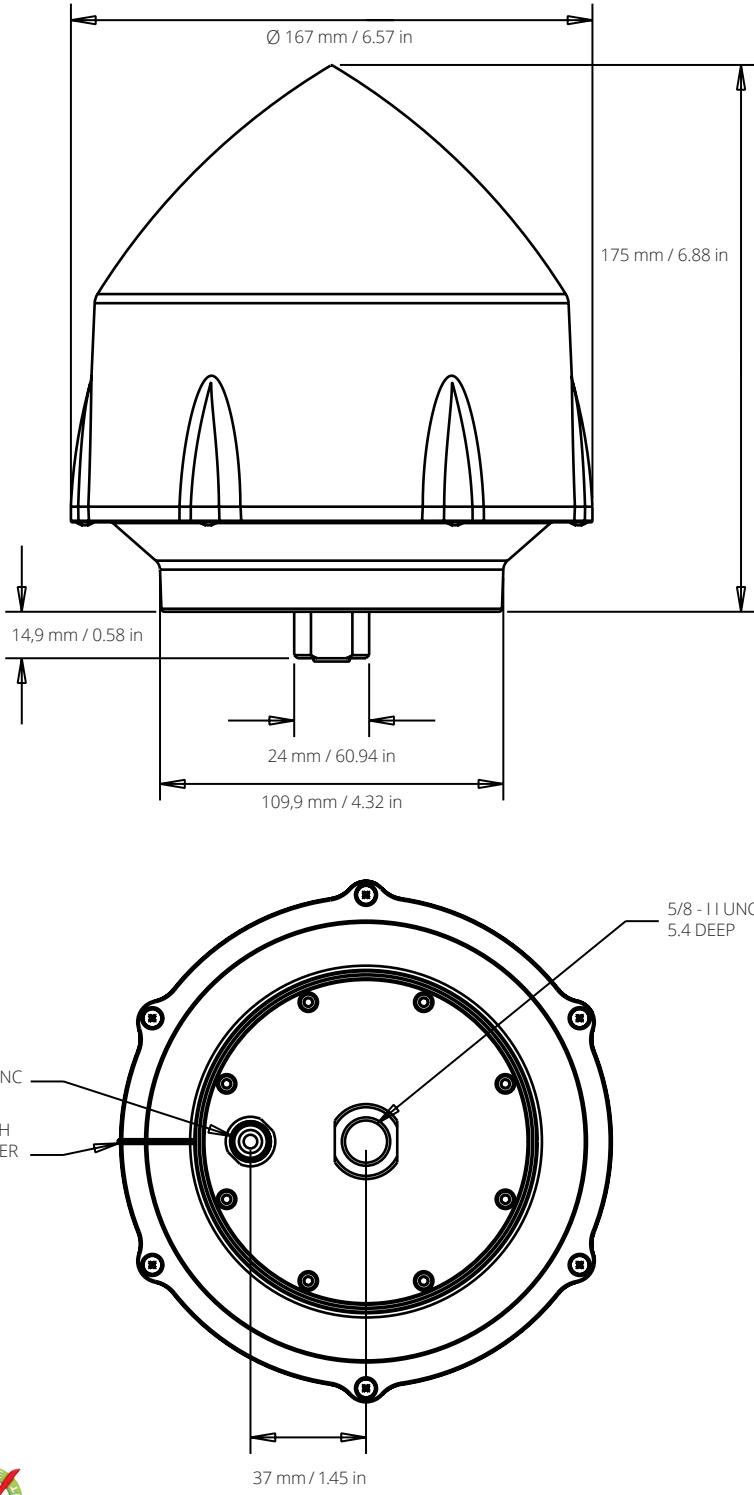

• Specifications subject to change without notice. Certain features and specifications may not apply to all models. © 2020 Septentrio NV. All rights reserved.

B3-01/2020

EMEA (HQ)

Greenhill Campus
Interleuvenlaan 15i
3001 Leuven, Belgium
+32 16 30 08 00

septentrio.com

Americas

Suite 200
23848 Hawthorne Blvd
Torrance, CA 90505, USA
+1 310 541 8139

sales@septentrio.com

Asia-Pacific

Shanghai, China
Yokohama, Japan

[Facebook](https://www.facebook.com/septentriotech) [LinkedIn](https://www.linkedin.com/company/septentrio/) [YouTube](https://www.youtube.com/septentriotech)

