

PAR30 IP68




LIFE AQUA PAR30 SERIES

Specification Sheet

Product Introduction

LIFE AQUA is a monor planet that orbits the sun. LIFE AQUA PAR30 can be presented as a strong, smart and efficient light bulb. LIFE AQUA PAR IP68 Series is the most efficient and brightest LED for general lighting solution in the market, and is indeed the first high power LED to achieve the requirements in a safe, durable, and resourceful way. Concededly it is perfect for brightening up wide areas, including indoor/outdoor commercial lighting, stage lighting or fountain lighting with waterproof casing. Living wisely it allows you to reduce a considerable amount of energy consumption and maintenance costs, and at the same time provide a beautiful, elegant atmosphere. Simple and easy to install, also guaranteed by our engineers to last up to 50,000 hours, LIFE AQUA PAR IP68 series are beautifully designed and will make a big difference in any ambient it is installed. More importantly, LIFE AQUA PAR IP68 Series has been certified by the most important safety certification organisations, such as UL, LASER, PSE, RoHS, CE, and FCC. All these provide a relieved safety environment to where it's applied.

Certificates

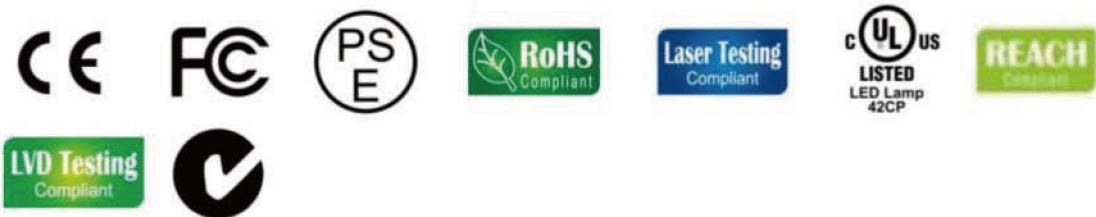

Features

- ✓ IP68 waterproof standard.
- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting
- ✓ Outdoor lighting

Specifications

Item	Specification	Details
Output	Beam Angle	30°, 38°, 45°, 50°, 60°, 72° 80°, 90°, 100°, 120°, 135°
	Colour Range	TW / NW / WW
	Lumen Maintenance	50,000 hours
Electrical	Input Voltage	100~277V AC
	Power Factor	24V DC > 0.9
	Power Consumption	15, 20 Watts
Physical	Bases	· E26 / 24 (US) · E26 / 27 (EURO)
	Weight	14.10 oz. (400 g)
	Lens	Optics PMMA
	Operating Temperature	-4° F to 104° F (-20°C to 40°C) -85° F to 104° F (-65°C to 40°C) (Optional)
	Humidity	0 – 95%, non-condensing
Certification and Safety	Certifications	PSE, Laser Testing, RoHS, UL CE , FCC ,REACH ,LVD , C-Tick , IP68
	Environment	Not for use in totally enclosed fixtures Suitable for damp location
	Warranty	2 years
Two Million Worldwide Product Liability Insurance.		

Optical Characteristics

Dominant Wavelength (nm) or Colour Temperature (K)

CREE LED chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4550K	6000K	10000K
Natural White	3250K	4000K	4750K
Warm White	2100K	3000K	3500K

LUXEON LED chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	5000K	6000K	6500K
Natural White	3500K	4500K	5000K
Warm White	2700K	3000K	3500K

EPISTAR LED chips

Correlated Colour Temperature	Min.	Typ.	Max.
True White	5000K	5500K	5700K
Warm White	2870K	3000K	3220K

Chipset Luminous Flux

Chipsets	CREE XT-E	
Power Consumption	15W	20W
Beam Angle	10% 45°/ 60°/ 80°/ 90°/ 100°/ 120°/ 135°	
True White	CRI 70	1600 lm
Natural White	CRI 80	1300 lm
Warm White	CRI 80	1150 lm
	CRI 90	920 lm

Chipsets	CREE XP-G		LUXEON Rebel ES	
Power Consumption	15W	20W	15W	20W
Beam Angle	10% 30°/50°/60°/90°/100°/135°		30°/50°/60°/80°/100°/135°	
True White	CRI 80	1400 lm	1850 lm	1400 lm
Natural White	CRI 80	1150 lm	1550 lm	1150 lm
Warm White	CRI 80	1000 lm	1350 lm	1000 lm
	CRI 90	-	-	800 lm

Chipsets	CREE XP-E		LUXEON Rebel	
Power Consumption	15W			
Beam Angle	10% 30°/38°/50°/80°/100°/135°		30°/38°/45°/72°/100°/135°	
True White	CRI 80	1100 lm	1100 lm	
Natural White	CRI 80	950 lm	950 lm	
Warm White	CRI 80	850 lm	850 lm	
	CRI 90	-	690 lm	

Chipsets	EPISTAR	
Power Consumption	15W	
Beam Angle	10% 80°/100° / 135°	
True White	CRI 98	680 lm
Warm White	CRI 98	520 lm

Chipsets	Lumileds - LUXEON Q	
Power Consumption	15W	20W
Beam Angle	10% 100° / 135°	
True White	CRI 80	1650 lm
Natural White	CRI 80	1400 lm
Warm White	CRI 80	1200 lm


Chipsets	OSRAM Square	
Power Consumption	15W	20W
Beam Angle	10% 45° / 60° / 80° / 90° / 100° / 120° / 135°	
True White	CRI 70	1650 lm
Natural White	CRI 70	1450 lm
Warm White	CRI 80	1200 lm
	CRI 92	960 lm (2400K)

Chipsets	LUXEON Tx	
Power Consumption	15W	20W
Beam Angle	10% 100° / 135°	
True White	CRI 70	1650 lm
Natural White	CRI 70	1450 lm
Warm White	CRI 80	1200 lm


Chipsets		CREE XP-L	
Power Consumption		15W	20W
Beam Angle	10%	38° / 90° / 120° / 135°	
True White	CRI 65	1850 lm	2500 lm
Natural White	CRI 75	1650 lm	2250 lm
Warm White	CRI 80	1500 lm	2050 lm

※All Chipset Luminous Flux Data are indicated in max values


Illuminance at Distance

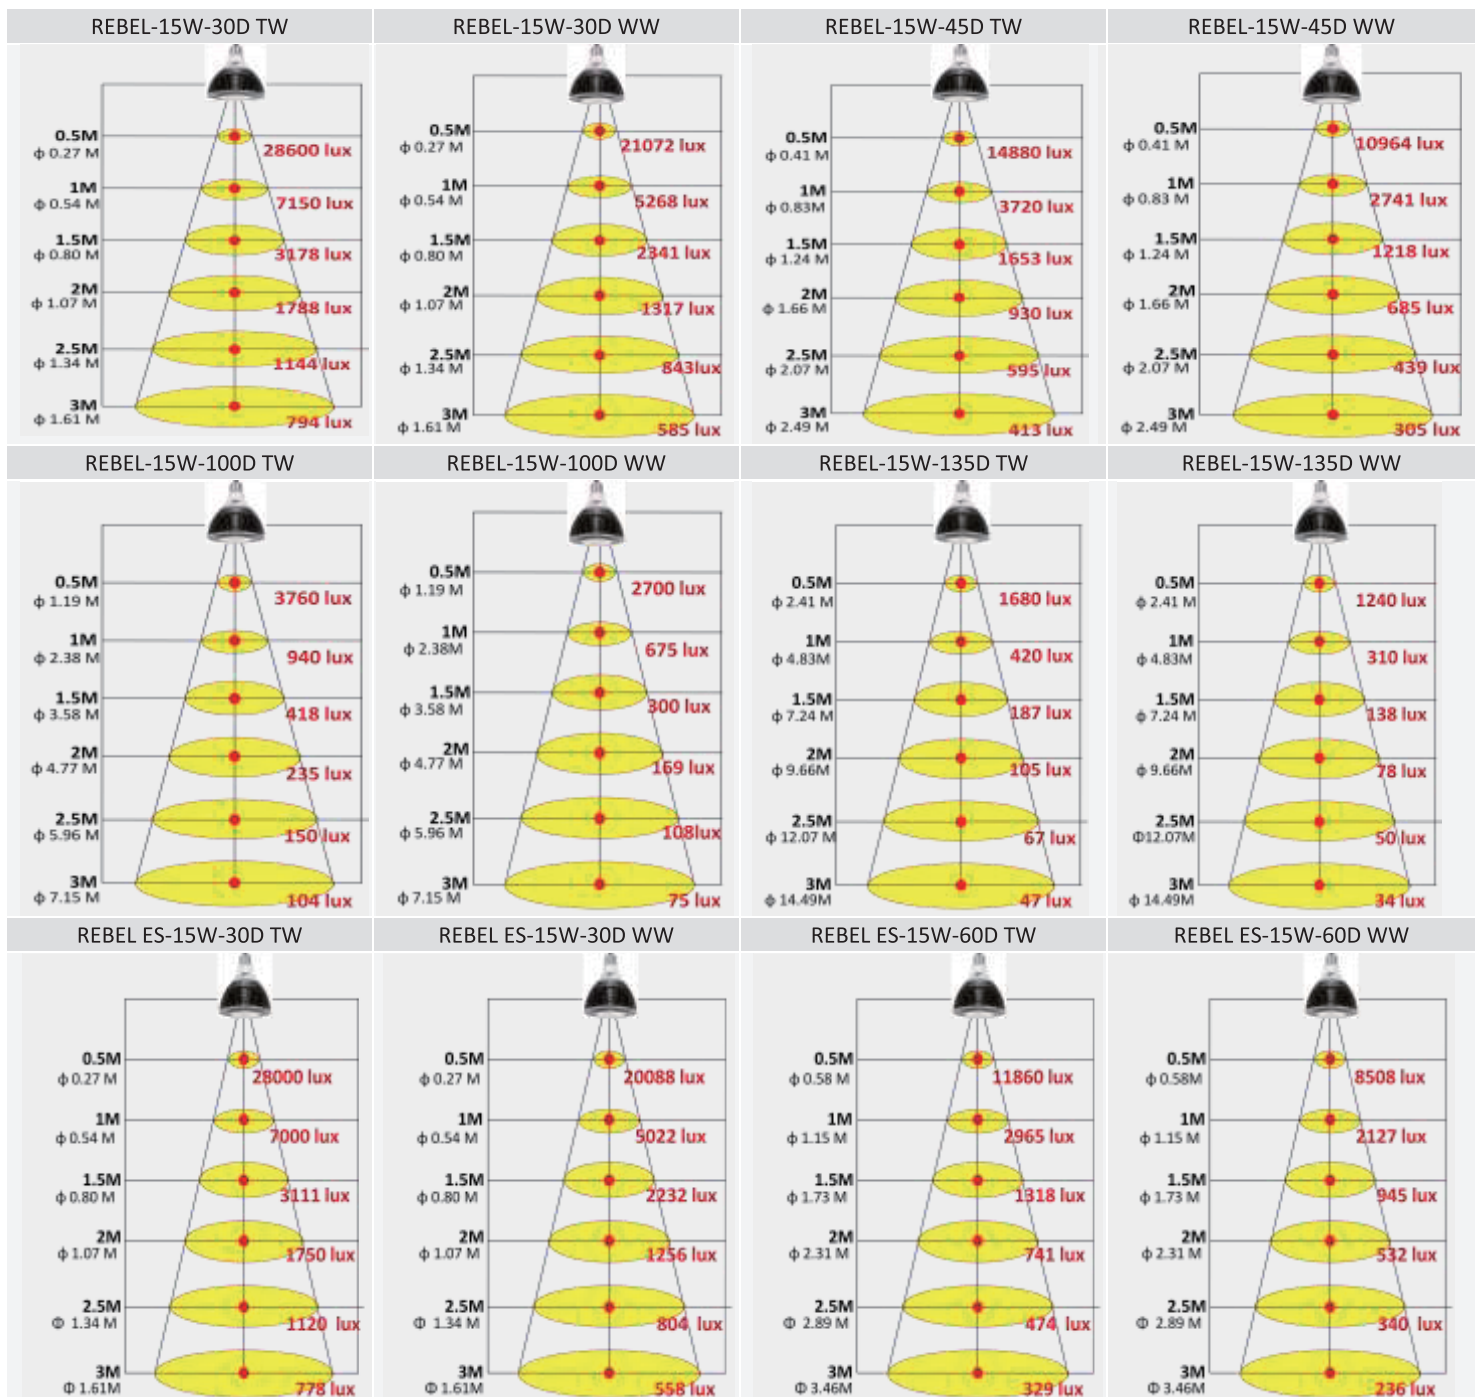


Illuminance at Distance

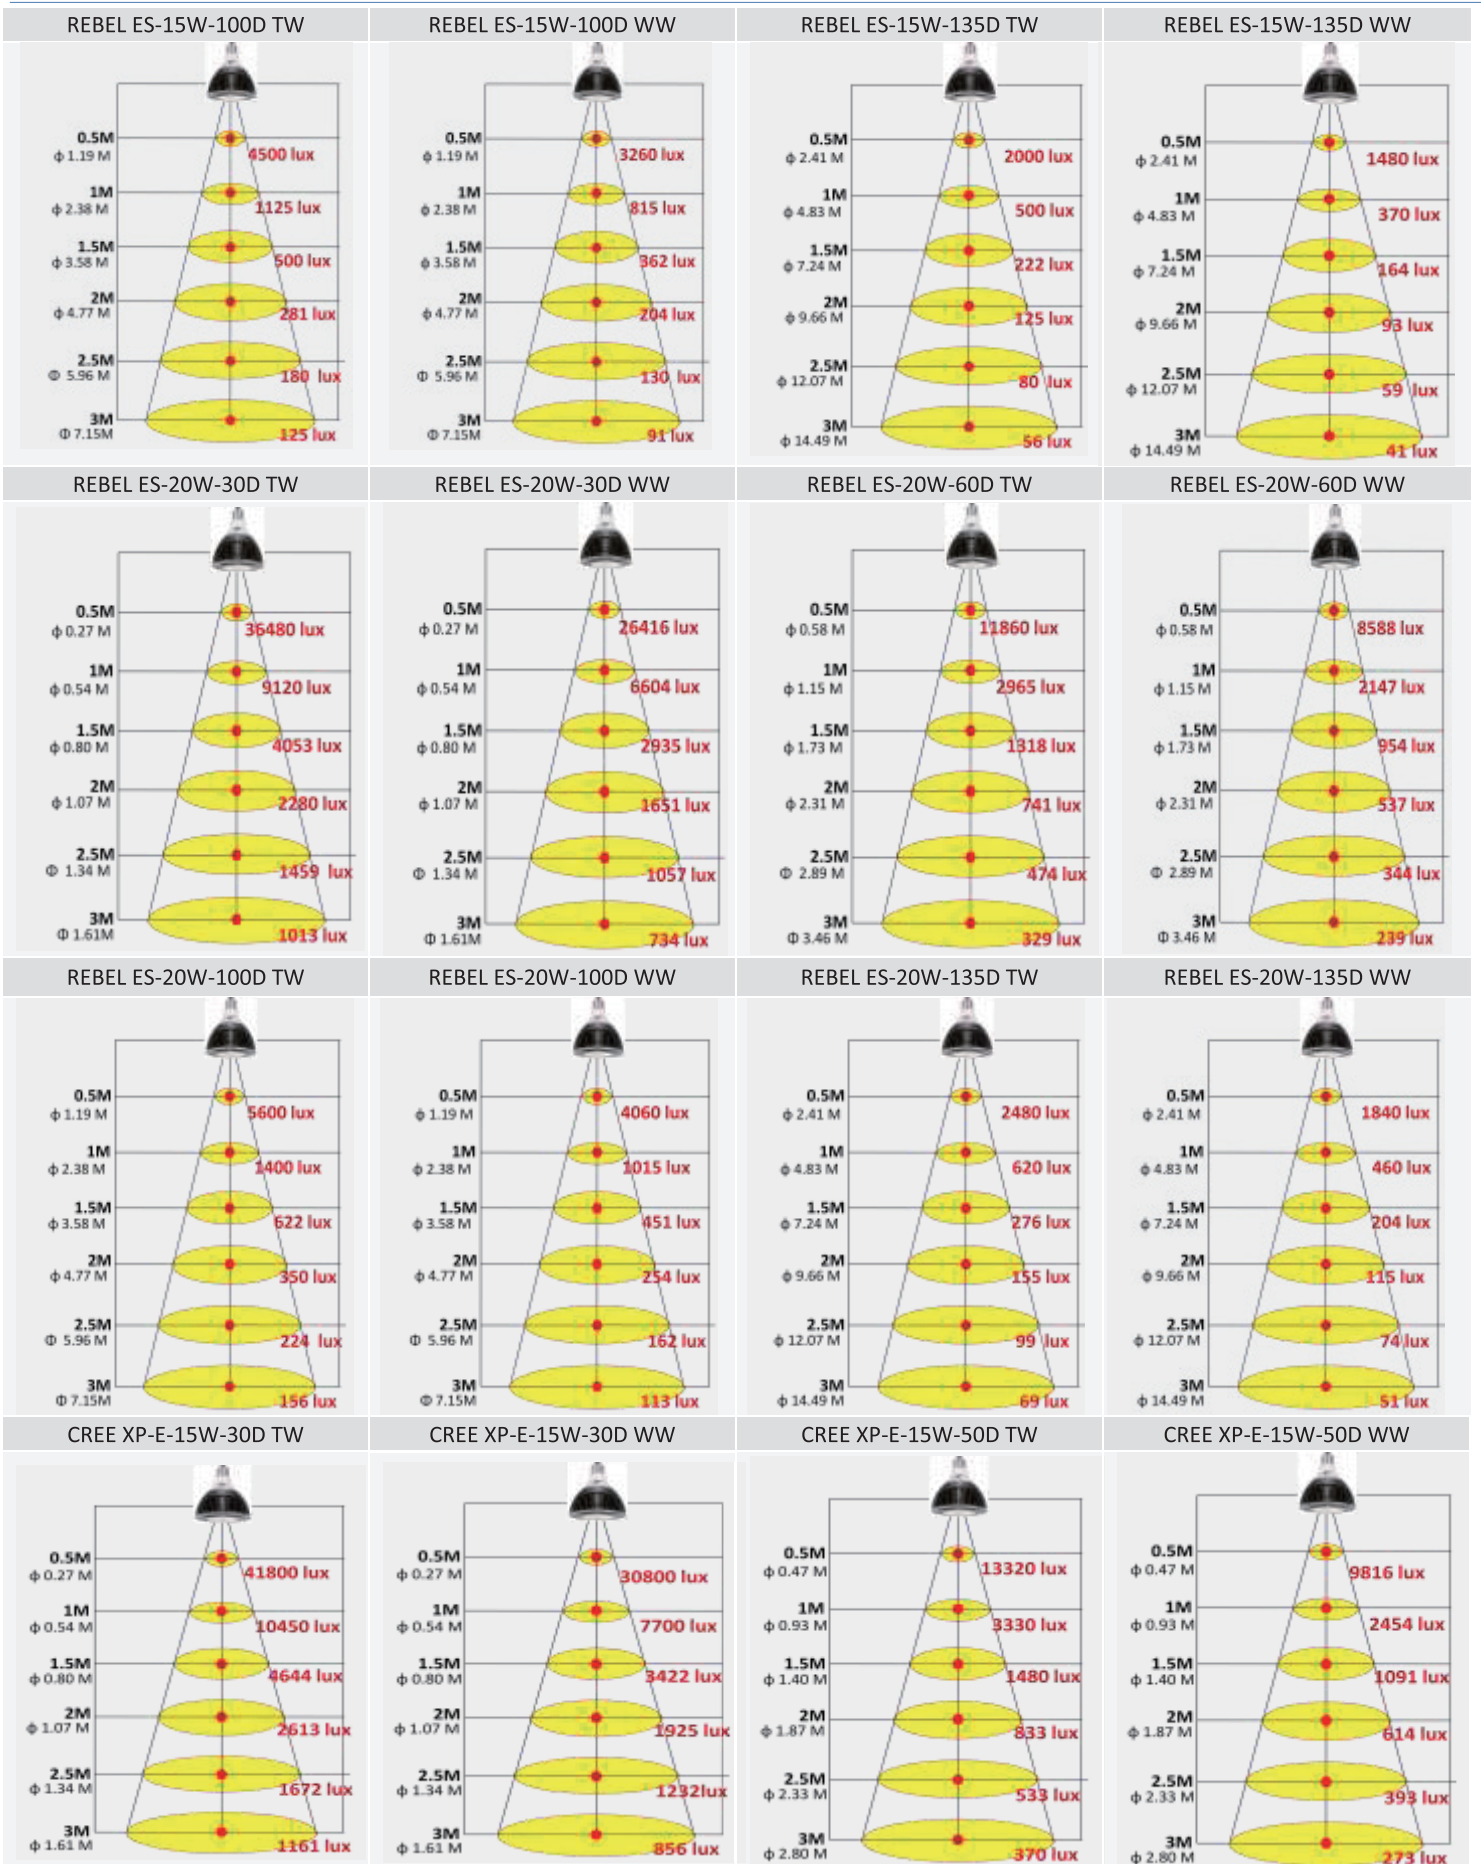


Illuminance at Distance

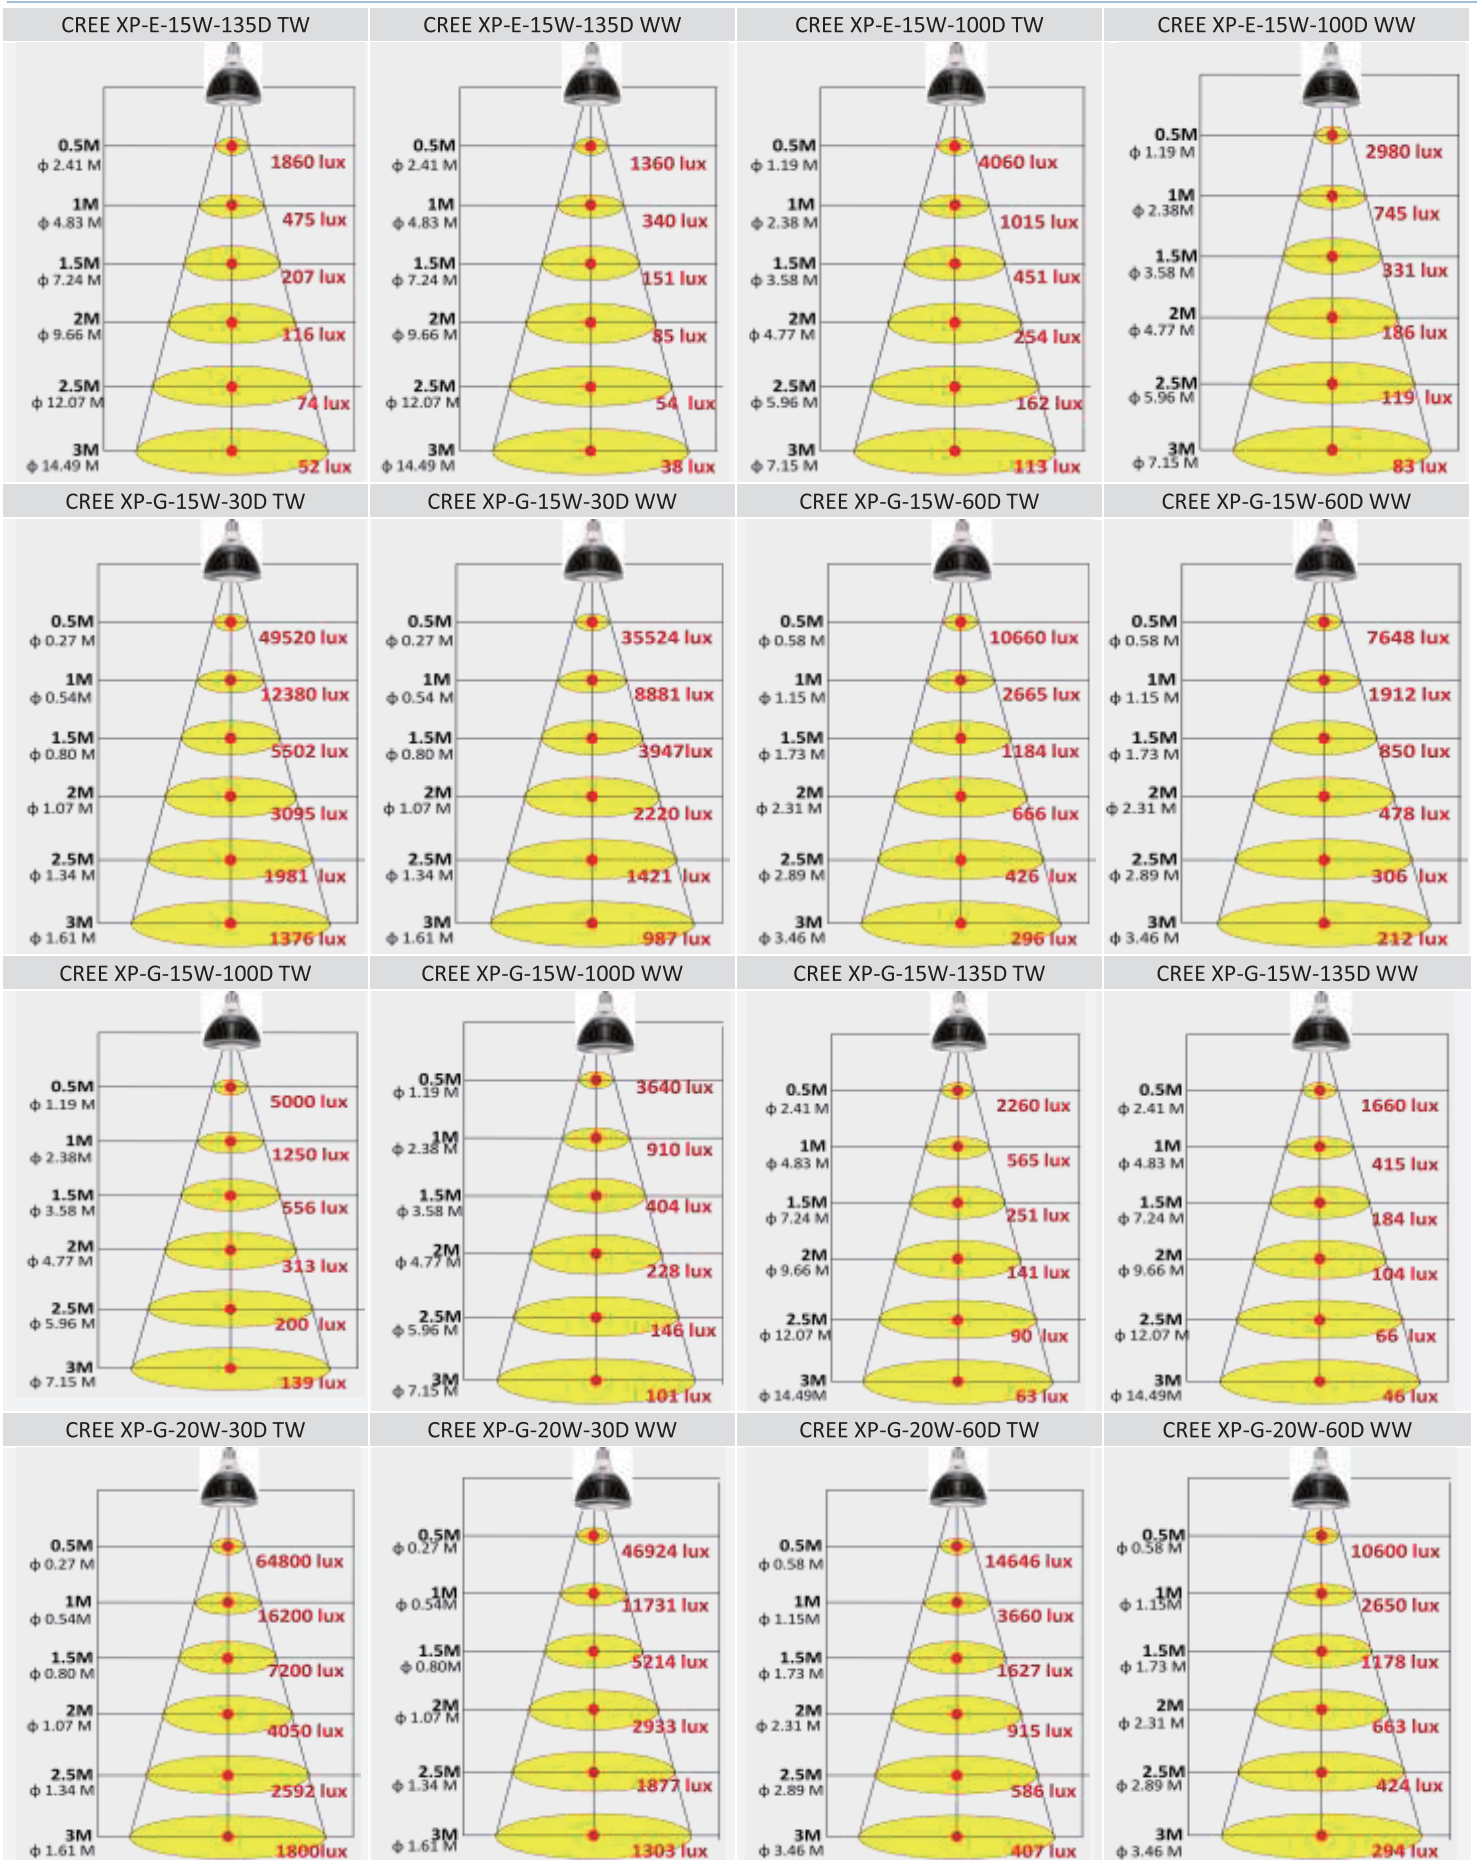

Illuminance at Distance

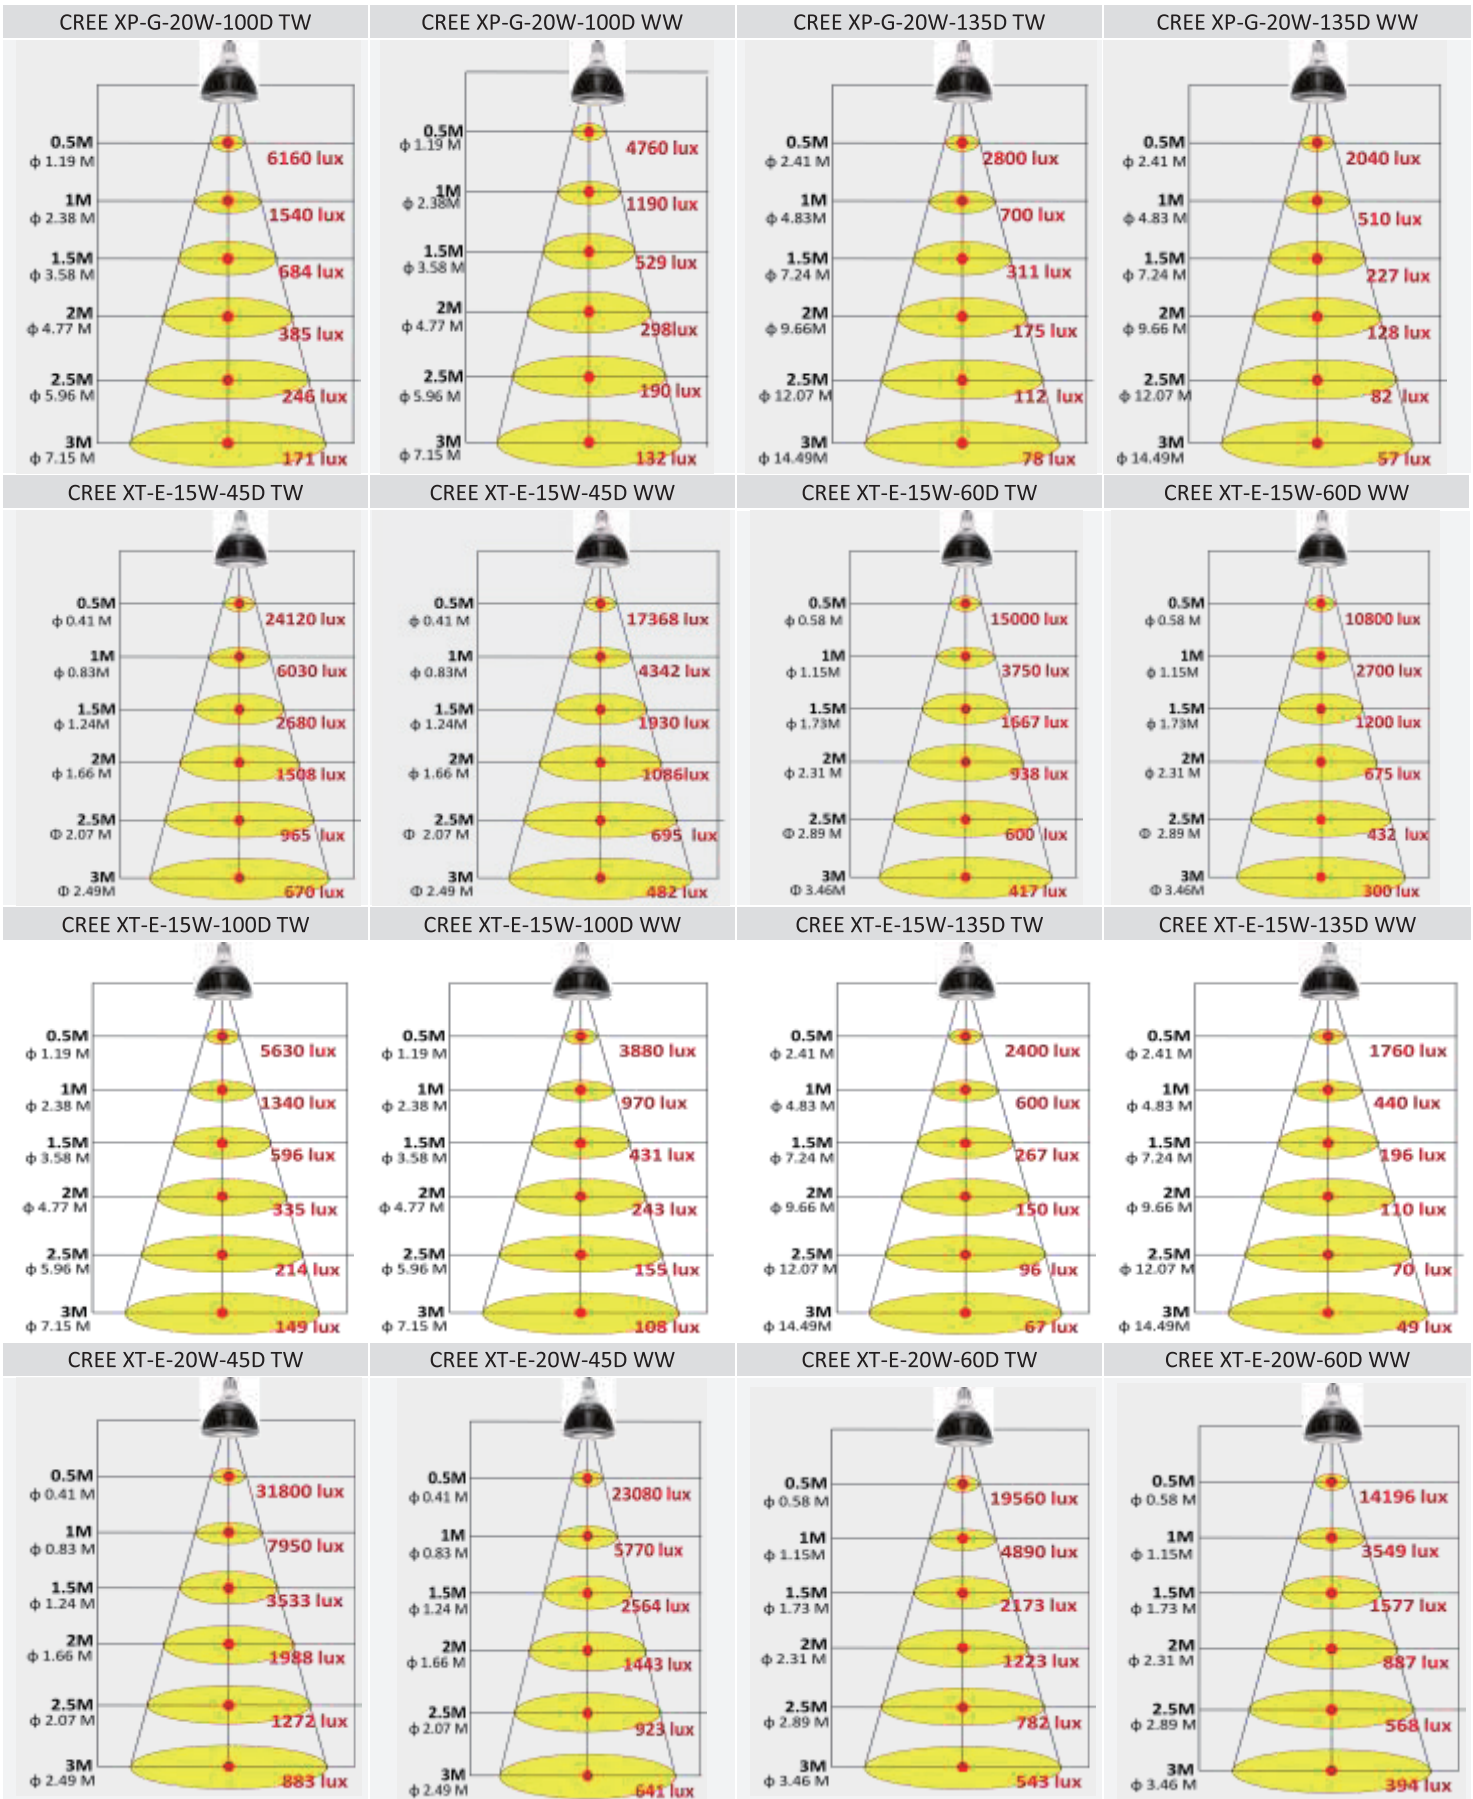

Illuminance at Distance

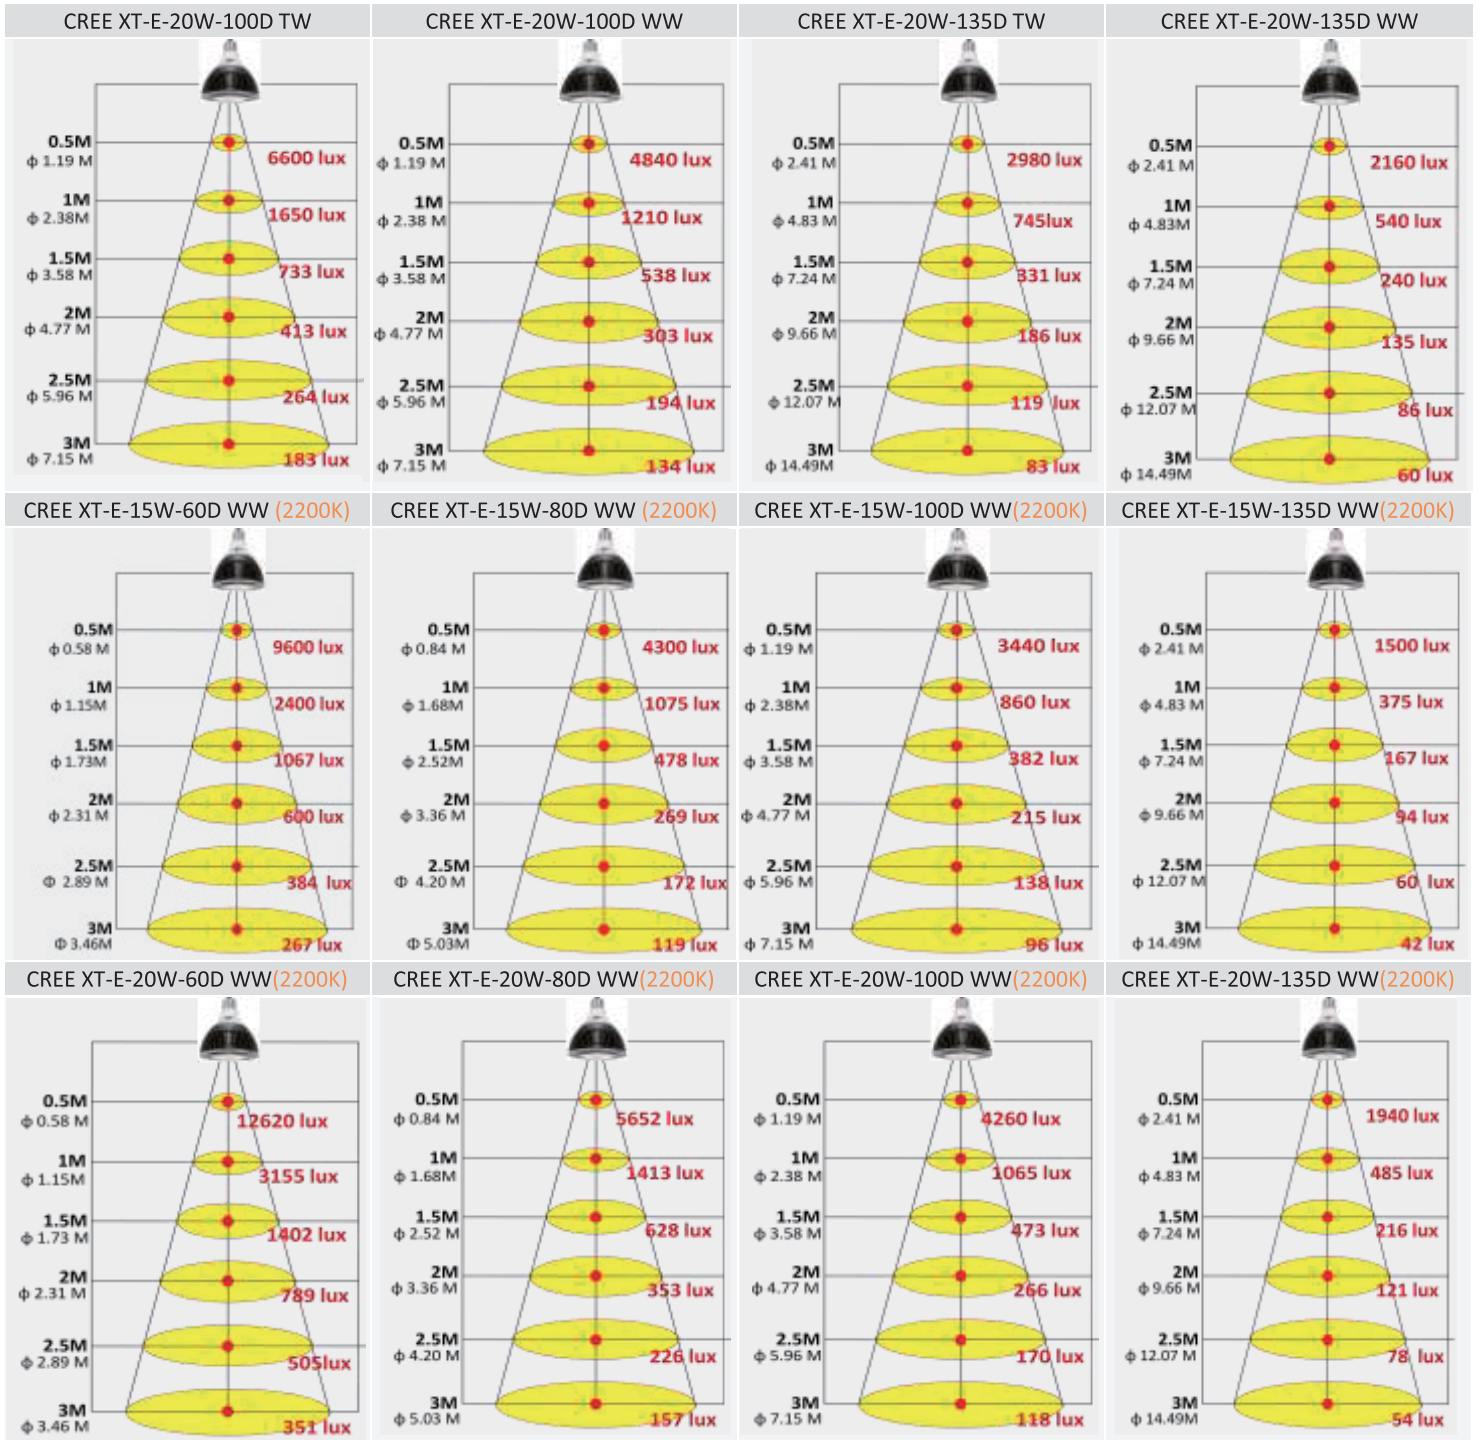

Mechanical Dimensions

P03

E26/27(EURO)

Beam Angle 30°, 38°, 45°, 50°, 60°,
72°, 80°, 90°, 135°



E26/27(EURO)

Beam Angle 100°



E26/24(US)

Beam Angle 30°, 38°, 45°, 50°, 60°,
72°, 80°, 90°, 135°



E26/24(US)

Beam Angle 100°



P04

E26/27(EURO)

Beam Angle 30°, 38°, 45°, 50°, 60°,
72°, 80°, 90°, 135°




E26/27(EURO)

Beam Angle 100°



E26/24(US)

Beam Angle 30°, 38°, 45°, 50°, 60°,
72°, 80°, 90°, 135°

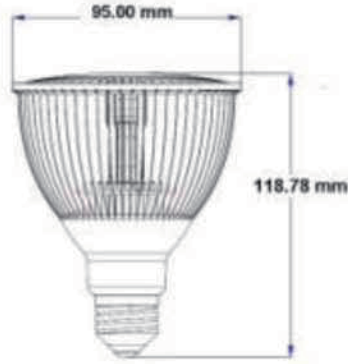

E26/24(US)

Beam Angle 100°



MaxLite Engineering Consultant Limited

Unit B, 12/F., Boldwin Industrial Building,
16-18 Wah Sing Street, Kwai Chung, N.T., Hong Kong.
Tel: (852) 27933591 Fax: (852) 27636470
Email: info@maxlite.hk

