

## Do Not Use

Individual long and thin finger style mounts, no metal ring




### Do Not Use:

American Classic does not recommend using rotors that have long and thin fingers to individual bolt mounts with very thin or no metal supporting ring. (see photo above)

## Recommended

Reinforced metal ring area around mounting points

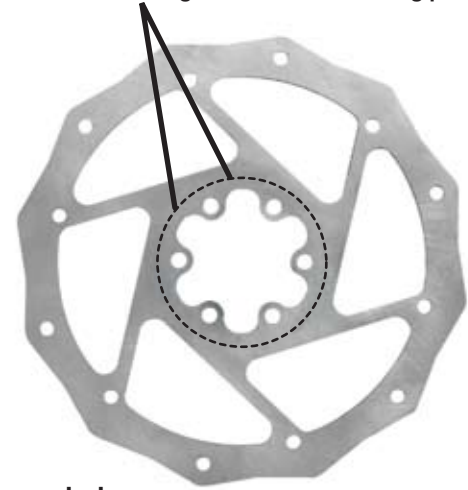

### Recommended:

American Classic recommends using a 6-bolt compatible rotor (photo above) that has a thicker reinforced metal ring surrounding the rotor mounts.

**NOTE:** Select a rotor that is reinforced near the rotor mount area. Use hardened steel bolts, not titanium bolts and do not skip bolts. Mount all 6 bolts with Loctite to the recommended torque specification per the rotor mount instructions. Do not use a rotor that has long, spindly fingers to individual bolt mounts (see “Do Not Use” photo above) without a metal ring close to the bolt holes. We recommend a rotor with reinforced bolt holes (see “Recommended” photo above).