



# Ring Size Guide

Before measuring your ring size, be sure this guide is printed in US Letter size and scaled to 100%. You can check the accuracy of your print by positioning a credit card on the line below or placing the correct coin in one of the labeled ring sizes. If the card or coin lines up, you're all set.



## Option 1: Measure by Matching Your Ring


To find your ring size, use an existing ring that fits you well. Match the inside of that ring with one of the circles below. When your ring has been placed on the right size, you should see only the white circle — with no colored space — inside your ring. If your ideal fit falls between two sizes, we recommend choosing the larger size.

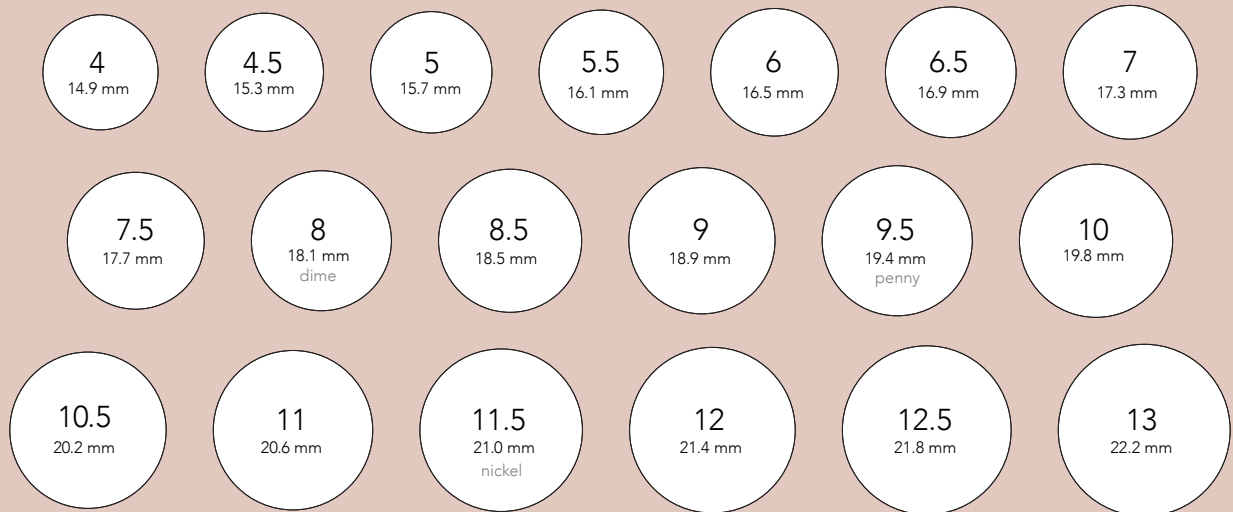

## Option 2: Measure with the Ruler

After you cut out the ruler, carefully cut the line to create a slit. Wrap the ruler around your finger at the base and pull the tapered end through the slit. To make sure the ring will fit comfortably, we suggest also measuring your knuckle. We recommend selecting a size that goes on and off your finger easily.

Sizing availability is specific to each product, though some larger rings can be sized down. Ring size may also vary slightly depending on style of the ring.

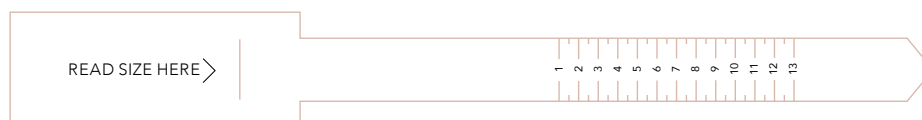

In need of assistance? Email customer service at [sales@loganhollowell.com](mailto:sales@loganhollowell.com)

LOGAN HOLLOWELL

# Ring Size Conversion Chart

Inside Circumference		US, Canada, and Mexico	UK, Australia, Ireland, New Zealand, South Africa	France	Germany, Russia, Ukraine, Asia	India, China, Japan, South America, Turkey, Israel	Italy, Spain, Netherlands, Switzerland
IN	MM						
1.74	44.2	3	F	44	14	4	4
1.77	44.8	3.25	F 1/2	44.625	14.25	--	4.625
1.79	45.5	3.5	G	45.25	14.5	5	5.25
1.82	46.1	3.75	G 1/2	45.875	14.75	6	5.875
1.84	46.8	4	H	46.5	15	7	6.5
1.87	47.4	4.25	H 1/2	47.125	15.25	--	7.125
1.89	48	4.5	I	47.75	15.5	8	7.75
1.92	48.7	4.75	J	48.375	--	--	8.375
1.94	49.3	5	J 1/2	49	15.75	9	9
1.97	50	5.25	K	49.625	16	--	9.625
1.99	50.6	5.5	K 1/2	50.25	16.25	10	10.25
2.02	51.2	5.75	L	50.875	--	11	10.875
2.04	51.9	6	L 1/2	51.5	16.5	12	11.5
2.07	52.5	6.25	M	52.125	16.75	--	12.125
2.09	53.1	6.5	M 1/2	52.75	17	13	12.75
2.12	53.8	6.75	N	53.375	--	--	13.375
2.14	54.4	7	N 1/2	54	17.25	14	14
2.17	55.1	7.25	O	54.625	17.5	--	14.625
2.19	55.7	7.5	O 1/2	55.25	17.75	15	15.25
2.22	56.3	7.75	P	55.875	--	--	15.875
2.24	57	8	P 1/2	56.5	18	16	16.5
2.27	57.6	8.25	Q	57.125	18.25	--	7.125
2.29	58.3	8.5	Q 1/2	57.75	18.5	17	17.75
2.32	58.9	8.75	R	58.375	18.75	--	18.375
2.34	59.5	9	R 1/2	59	19	18	19
2.37	60.2	9.25	S	59.625	19.25	--	19.625
2.39	60.8	9.5	S 1/2	60.25	19.5	19	20.25
2.42	61.4	9.75	T	60.875	19.75	--	20.875
2.44	62.1	10	T 1/2	61.5	20	20	21.25
2.47	62.7	10.25	U	62.125	20.25	21	22.125
2.49	63.4	10.5	U 1/2	62.75	20.5	22	22.75
2.52	64	10.75	V	63.375	--	--	23.375
2.54	64.6	11	V 1/2	64	20.75	23	24
2.57	65.3	11.25	W	64.625	--	--	24.625
2.59	65.9	11.5	W 1/2	65.25	21	24	25.25
2.62	66.6	11.75	X	65.875	--	--	25.875
2.65	67.2	12	X 1/2	66.5	21.25	25	26.5
2.68	68.1	12.25	Y	67.125	21.5	--	27.125
2.71	68.5	12.5	Z	67.75	21.75	26	27.75
2.72	69.1	12.75	Z 1/2	68.375	--	--	28.375
2.75	69.7	13	--	69	22	27	29