

Description

Robinhood Power Pack Rangehood Stainless Steel
PP52X (52cm); PP75X (75cm)



PP52X

PP75X

Key Features


Max Motor Performance
 750 m³/hr

Power Levels
 3

Control Type
 Push Buttons

Lighting
 2 x 1.5W LED

Venting Type
 Ducted or recirculated

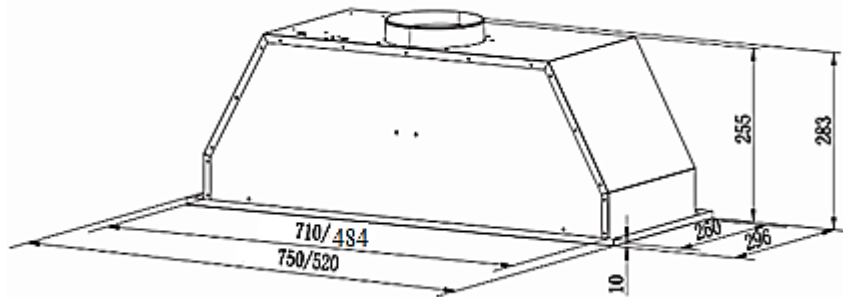

Specifications

Voltage	220~240v
Frequency	50~60Hz
Motor (number x power)	1x750m ³ /h / 210W
Motor housing&blower	plastic motor housing with plastic blower
Lighting	2x1.5W LED
Total power	213W
Controls	Push buttons
Speed levels	3
Filters	1xAluminum filter with SS surface
Carbon filters	Optional (RHCF120)
No return valve	Included
Air outlet (mm)	150mm
Power cord length	1.5M
Chimney(upper+lower)	No chimney
Product dimensions (WxDxH)	520x296x255~283mm (PP52X); 750x296x255~283mm (PP75X)
Packaging dimensions (WxDxH)	555x315x335 (PP52X); 785x315x335 (PP75X)
Net weight	6.8kg (PP52X); 7.5kg (PP75X)
Gross weight	7.9kg (PP75X); 9kg (PP75X)

IEC 61591 Tested Air Flow		
Power Level	Air Flow (m ³ /hr)	Noise Level (dB)
1	402	61
2	505	65
3	602	68