

## Description

ROBINHOOD POWERPACK RANGEHOOD STAINLESS STEEL  
 PP52X (52cm); PP75X (75cm)



PP52X

PP75X

## Key Features


**Max Motor Performance**  
 750 m3/hr

**Power Levels**  
 3

**Control Type**  
 Push Buttons

**Lighting**  
 2 x 1.5W LED

**Venting Type**  
 Ducted (recommended)

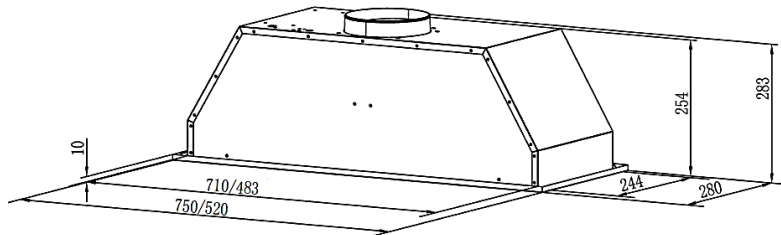

Dated: 29/03/2022

## Specifications

<b>Voltage</b>	220~240v
<b>Frequency</b>	50~60Hz
<b>Motor/ Power</b>	1x750m <sup>3</sup> /h / 210W
<b>Motor Housing &amp; Blower</b>	Plastic motor housing with plastic blower
<b>Lighting</b>	2x1.5W LED
<b>Total Power</b>	213W
<b>Controls</b>	Push buttons
<b>Speed Levels</b>	3
<b>Filters</b>	1xAluminum filter with SS surface
<b>Carbon Filters</b>	Optional (RHCF120)
<b>No Return Valve</b>	Included
<b>Duct Outlet (mm)</b>	150mm
<b>Power Cord Length</b>	1.5M
<b>Chimney</b>	No chimney

	<b>PP52X</b>	<b>PP75X</b>
<b>Product Dimensions (WxDxH) mm</b>	520x280x(254-283)	750x280x(254-283)
<b>Packaging Dimensions (WxDxH) mm</b>	555 x 315 x 335	785 x 315 x 335
<b>Net Weight</b>	6.8kg	7.5kg
<b>Gross Weight</b>	7.9kg	9.0kg

<b>Air Flow &amp; Noise Level*</b>		
<b>Power Level</b>	<b>Air Flow (m<sup>3</sup>/hr) (IEC 61591)</b>	<b>Noise Level (dB) (IEC 60704-2-13)</b>
1	402	61
2	505	65
3	602	68

\*Air Flow & Noise Level testing is conducted in a controlled lab environment as per the IEC standards.