

## Description

ROBINHOOD STAINLESS STEEL WALL CANOPY SOFT TOUCH CONTROL  
**RHWC60X (BRIMSTONE 60); RHWC90X (BRIMSTONE 90)**



RHWC60X



RHWC90X

## Key Features

### Max Motor Performance

1200 m<sup>3</sup>/hr

### AC Motor

Fully sealed AC motor in weldless casing

### Metal Fan Blades


With Teflon finish to ensure smooth air flow

### Back-Lit Soft Touch Control

User friendly control enables easy operation

### Lower Noise Level

46dB at power level 1

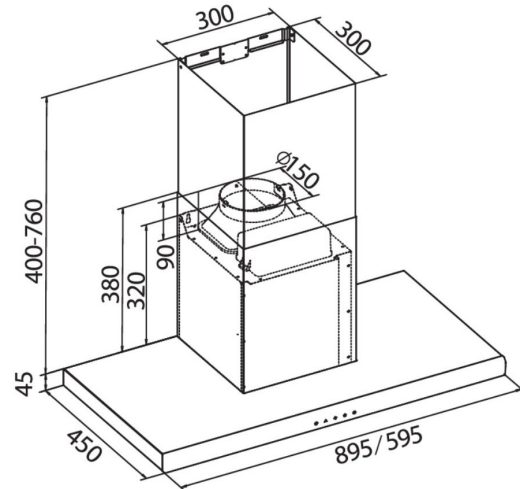

## Specifications

### AESTHETICS

Rangehood Type	Wall Canopy	
Finish	Stainless Steel	
Filter Type	Decorative SS/Aluminium Filters	
No. of Filters	RHWC60X: 2 PCs	RHWC90X: 3 PCs
Light	2 * 2W LED	

### TECHNICAL DETAILS

Power Levels	3
Motor Wattage	180W
Voltage/Frequency	240V/50Hz
Total Power Consumption	184W
Plug	Fitted, 10AMP

### DUCTING

Ducting Diameter	Ø150mm
Ducting Type	Can be ducted or recirculated
Optional Charcoal Filter	CARBONFTLDEEU (Pack of 2)
Optional Extension Flue	EXTKITDEEU27 (For 2.7m stud) EXTKITDEEU30 (For 3.0m stud)

### DIMENSIONS & WEIGHTS

	RHWC60X	RHWC90X
Chimney Size (W*D*H)	300*300*(400-760)mm	300*300*(400-760)mm
Product Dimensions (W*D*H)	595*455*(445-805)mm	895*455*(445-805)mm
Carton Dimensions (W*D*H)	655*530*530mm	955*530*530mm
Net/Gross Weight	17.5/19.0Kg	19.0/24.0Kg

IEC 61591 Test Data		
Power Level	Air Flow (m <sup>3</sup> /hr)	Noise Level (dB)
1	520	46
2	633	51
3	819	55