


Wheel Well & Undermount Water Tanks

Freshwater Fittings Kit

PARTS LIST

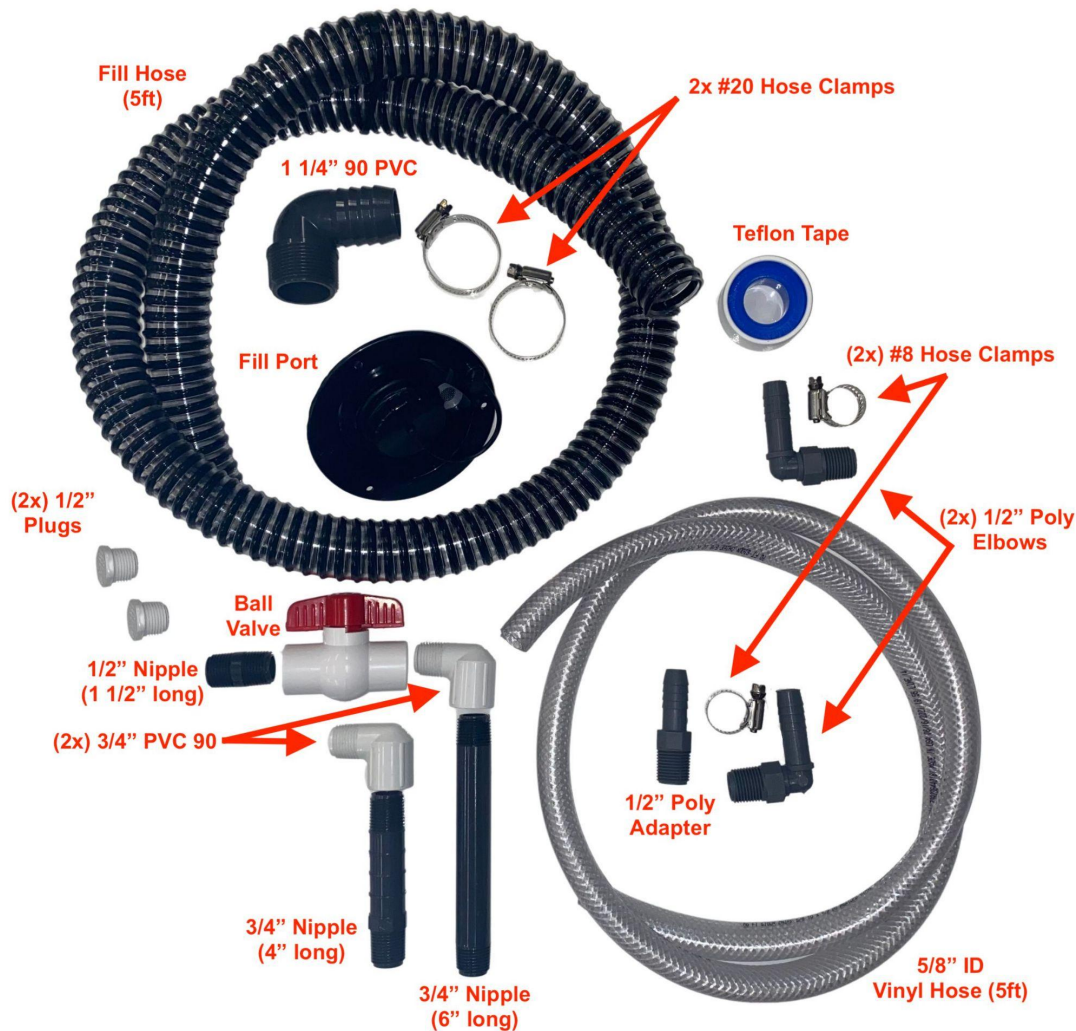

- (1x) 1 1/4" 90
- (2x) 3/4" 90's
- (1x) 3/4" Ball Valve
- (1x) 3/4" Nipple (6" long)
- (1x) 3/4" Nipple (4" long)
- (1x) 3/4" Nipple (1 1/2" long)
- (1x) 1/2" Poly Adaptor
- (2x) 1/2" Poly Elbows
- (2x) 1/2" Plugs *
- (1x) 3/4" Plug **
- (1x) 1 1/4" Plug***
- (2x) #20 Hose Clamps
- (2x) #8 Hose Clamps
- (1 roll) Teflon Tape
- (1x) Fill Port
- (5ft) Fill Hose
- (5ft) 5/8" ID Vinyl Hose

* 1/2" plugs NOT included with undermount water tanks, ONLY 1x included with 22G.

** 3/4" plug ONLY included with 29G & 32G wheel well water tanks.


** 1 1/4" plug ONLY included with 22G wheel well water tanks.

Wheel Well & Undermount Water Tank Freshwater Fittings Kit INSTALL INSTRUCTIONS

- Use one of the upper 1 ¼" ports for your fill port
 - Use one of the bottom ¾" ports for your drain
 - Use one of the upper ½" ports for your vent
- Use one of the bottom ½" ports for your water pump hose
- Use the ½", ¾" and 1 ¼" plugs to seal any remaining ports - see parts list for your specific tank
 - Use Teflon tape on all threaded fittings to ensure a proper seal




FILL PORT

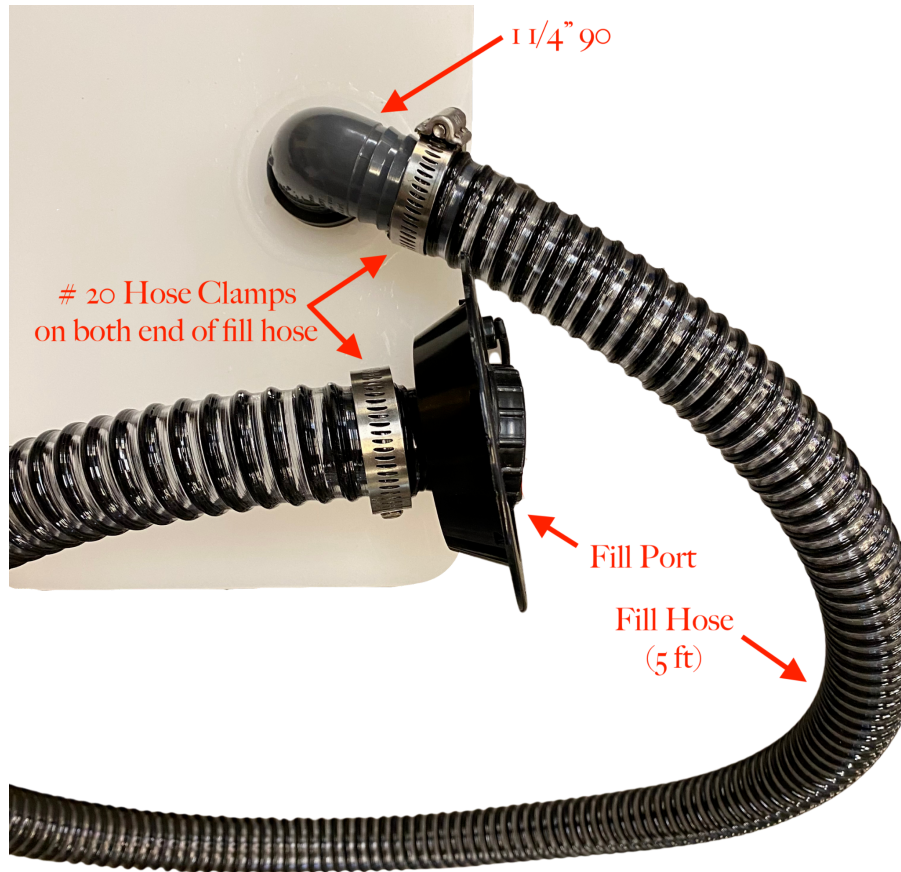

VENT



DRAIN TO GREY TANK OR GROUND (OPTIONS)

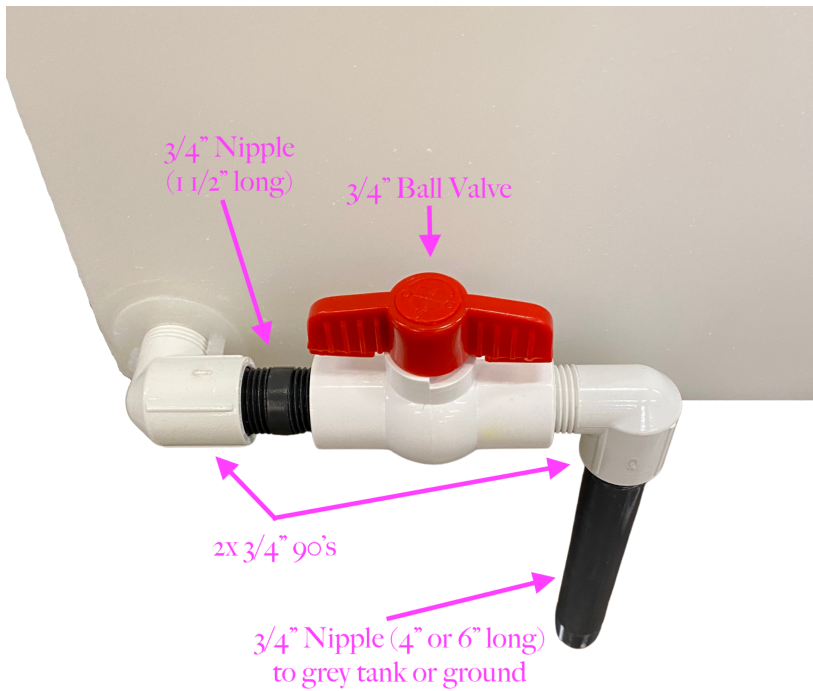

HOSE TO WATER PUMP (OPTIONS)

