

DRY HARD™

DRYING AGENT ADDITIVE



EXCLUSIVELY DESIGNED TO OPTIMIZE THE DRYING PROCESS OF OIL-BASED STAINS, COATINGS, AND PAINT.



TECHNICAL DATA SHEET

PRODUCT DESCRIPTION

A drying agent exclusively designed to maximize the drying of coatings and paints for high humidity and low temperature areas. Dry Hard™ Drying Agent can be used for indoor or outdoor use, in any brand of oil-based stains, coatings, or paints. It ensures solvent-based products are thoroughly cured with minimal downtime. Don't let cold or humid weather slow you down.

PRODUCT FEATURES

- Easy to Use
- VOC Compliant
- Eliminates Drying Problems
- Great for Humid & Low Temp Areas

PRODUCT USES

- Great for high demand jobs requiring quick turnaround
- Formulated for oil-based stains, coatings, and paints

HOW IT WORKS

In cold conditions, other products will skin over when the top is dry but underneath is wet. This results in a soft film that is hard to abrade. ProCoat® Dry Hard™ allows the product to dry from the bottom up, instead of top-down.


TYPICAL PROPERTIES

COLOR	Purple
SOLIDS CONTENT	< 10%
MIX TIME	5 minutes
FLASH POINT	>200°F (93°C)
ODOR	Odorless
CLEAN UP	Water
PACK SIZE	Case of 12
SHELF LIFE	1 year from date of production (unopened)
STORAGE/TRANSPORT	Keep from freezing or exceeding 100°F during storage/transport
DISPOSAL	Waste & empty containers should be handled in accordance with local regulations

MIXING INSTRUCTIONS

Loosen measuring chamber cap and squeeze bottle until desired amount is in chamber. Remove cap & pour slowly into coating.

MIX WELL. Let product sit for 5 minutes. **USE 2 OUNCES OF DRY HARD FOR EVERY 1 GALLON OF PRODUCT.**

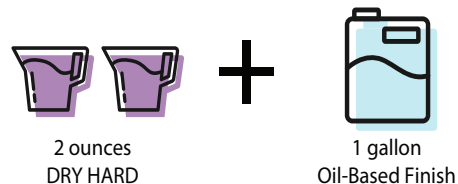

FOR TECHNICAL ADVICE CONTACT (800) 962-0344



APPLICATION PROCEDURES

T-Bar Application

- Shake container well and mix 2 ounces of Dry Hard into 1 gallon of oil-based product.
- Shake coating vigorously for 30-45 seconds and let sit 10-15 minutes before applying.
- Pour a 6" to 8" wide line of finish along the starting wall.
- Following the grain of the wood, draw a clean, pre-dampened applicator forward.
- Following the grain of the wood, move the finish toward the opposite wall.
- Hold the applicator at a snowplow angle to maintain a wet edge at all times.
- Maintain at least 3" wide wet edge at all times to ensure proper coverage rate.
- To prevent lapping and dry marks, use recommended coverage 450-500 square foot per gallon.
- Do not spread too thin.
- When cutting in floor, never work more than five feet ahead of the person applying the finish.
- For smoothest results, before applying final coat, buff with conditioning pad.
- Always vacuum and tack thoroughly with a slightly water-dampened mop or cloth after abrading.

Roller Application

- Shake container vigorously for 30-45 seconds and let sit 10-15 minutes before applying.
- The use of 3/8 or 1/4 microfiber rollers are suggested.
- The applicator should evaluate each application and use the appropriate roller material and size determined by the porosity of the substrate being coated.

Recoating

Floor must be free of wax, polish, and oily residue. Use ProCoat® Clean & Prep™ System to ensure proper adhesion. If the recoating process is not followed and floor compatibility not determined, adhesion failure can occur.

Intercoat Abrasion

It is unnecessary to abrade between ProCoat® oil-based sealer & finish coats unless more than 24 hours has passed since the previous coat was applied. For smoothest results, abrade between each coat as necessary using 180-240 grit abrasives.

PREVENTION & RESPONSE

Wash hands thoroughly. Wear protective gloves and clothing. Use eye and face protection. In case of eye contact, flush immediately with water for several minutes. Seek medical attention if irritation occurs. If on skin, wash thoroughly with soap and water.

RECOMMENDED SYSTEMS | WOOD

Newly Sanded Floors

Apply 1 coat of Artisan™ Series Wood Sealer with 1-2 coats of Artisan™ Series Polyurethane. 2 ounces of Dry Hard may be added into each gallon of product.

Coating over Stains

Allow stain to dry per manufacturer's directions or longer depending on atmospheric conditions. A test area is recommended to ensure compatibility with stain.

Recoating Existing Surfaces

Abrade with appropriate screen or conditioning pad. Apply 1 coat of Artisan™ Series Wood Sealer (+Dry Hard). Follow with 1 coat of Artisan™ Series Polyurethane (+ Dry Hard). Compatibility must be determined by applicator.

MAINTENANCE CARE

Vacuum and mop the floor regularly with ProCare® Citrus Floor Cleaner. This cleaner leaves no film or sticky residue and is safe around kids and pets. Detailed maintenance instructions are available at www.procoatinc.com.



SCAN TO SHOP PROCARE®
CITRUS FLOOR CLEANER

available at
amazon

WARRANTY

If ProCoat® products are proved defective, the user's exclusive remedy will be at ProCoat's® option to replace the defective ProCoat® products or to refund the purchase price for the defective quantity. Except for the replacement or refund remedies, ProCoat® is not liable for direct damages or liable for indirect, incidental or consequential damages, regardless of the legal theory asserted, including negligence and strict liability.

FOLLOW US ON SOCIAL MEDIA @procoat



Email: info1@procoatinc.com
Web: procoatinc.com

Address: 100 Commerce Park Drive
Cabot, Arkansas 72023

PRO COAT
Hardwood Floor Coatings and Specialty Products