

# stayflush


motorsports

## SFM ProR / ProXp Mounting Instructions

### Tools Needed

- Your favorite cutting tool
- Philips screw driver
- Drill
- T4 Hex head
- Patience

**1. Start by trimming conservatively following the highlighted area. Make sure to leave room on the top corners to allow the mounting screws to grab**

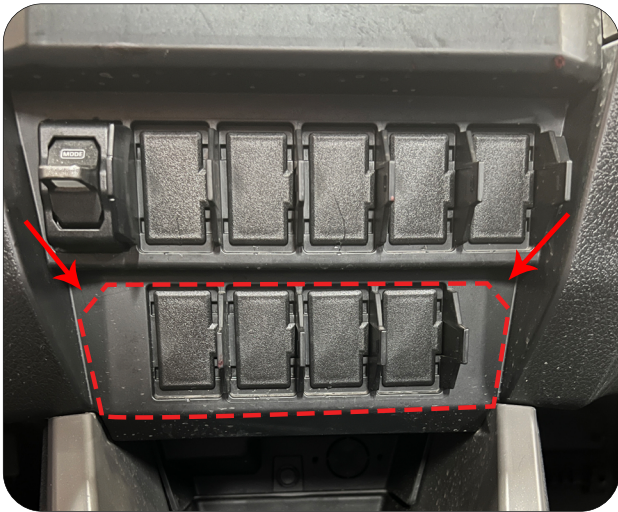

**2. Sit the mount in place. Using a pencil, place a small mark to guide you on where to position the lower mounting bracket**



**3. Remove the console and using the self tap screw, screw in the bracket, not completely tight but enough to keep it in place and be able to adjust the height.**



**4. Position the mount back on the dash and adjust the bracket until it lets the console sit flush on the dash. Once it sits flush remove the console and tighten the lower bracket.**



**5. Grab the radio and slide it through the rear of the radio slot, and bolt in the screws to you liking with the bolts provided.**




**6. Mount the intercom brackets to the intercom like the image below but do not tightern completely.**




**7. Slide the intercom through the rear of the mount and secure the intercom brackets with the m6 bolts provided.**



**8. Once your happy with the position of the intercom go ahead and tighter the rear intercom brackets bolts.**

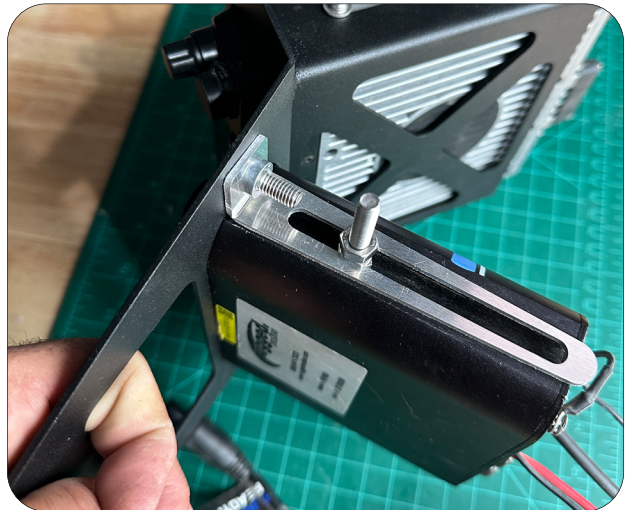

**9. Your mount should be taking shape. Mount your switchpro with the "U" brackets switchpro provides in the slot. Your switchpro should sit right on the slot.**

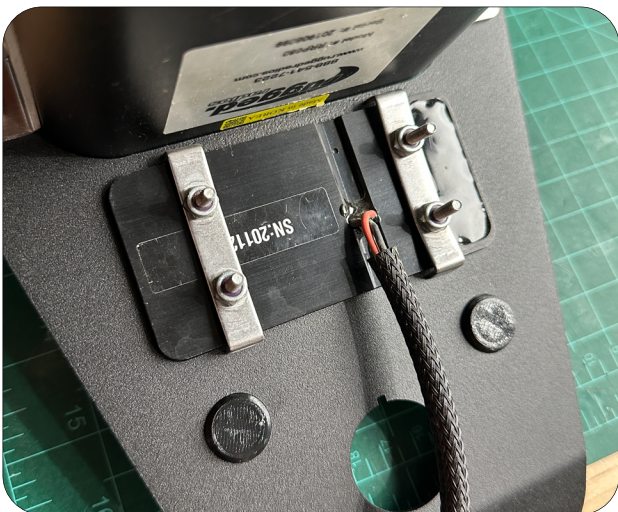

**9. Here comes the tricky part, once your have all your wiring in place, go ahead and gently start placing the bracket in and plugging in your wires. Once complete and have it in place Go ahead and bolt in the lower M6 bolt to the bracket and the top 2 self tapping screws into the plastics. Image below is PCI radios but its the same concept with Rugged Radios.**

