


FOAM EDUCTOR

Style 203 In-Line Eductor

- Eductors are rated for optimum flow at 200 psi (14 bar) inlet pressure.
- Works well with nozzles rated at 75 psi (5 bar) and 100 psi (7 bar).
- Optional flow rates at 60 GPM, 95 GPM and 125 GPM.
(Style 203-60, Style 203-95 and Style 203-125 respectively).
- Ball check valve prevents back flow into foam concentrate.
- Compatible with most foam concentrates.
- Complete with 6-1/2' pickup hose and 15" stainless steel tube.

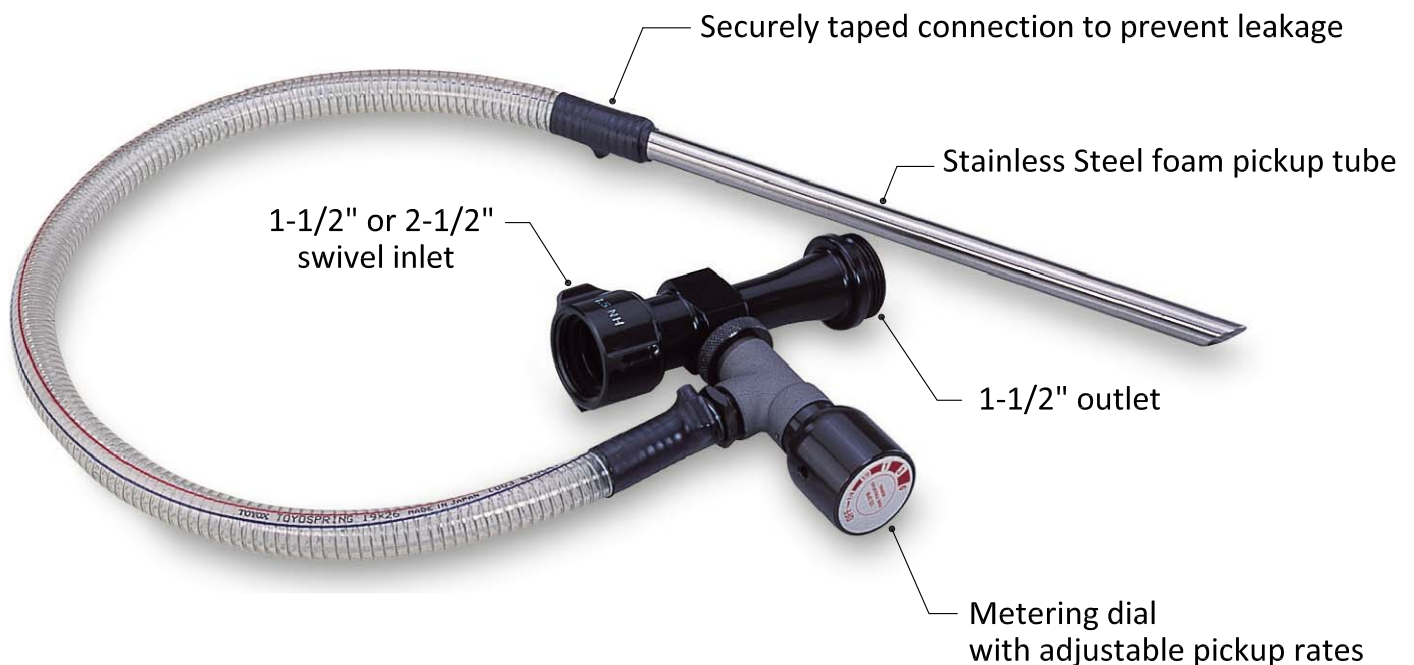

FOAM EDUCTOR

Specification

Style	Material	Inlet Size	Outlet	Flow		Length	Weight Lbs.(kg)
				GPM	LPM		
203-60	Alloy	1-1/2" or 2-1/2" (38 or 65 mm)	1-1/2" (38 mm)	60	230	8.6" (218 mm)	3.5 (1.6 kg)
203-95	Alloy	1-1/2" or 2-1/2" (38 or 65 mm)	1-1/2" (38 mm)	95	360	8.6" (218 mm)	3.5 (1.6 kg)
203-125	Alloy	1-1/2" or 2-1/2" (38 or 65 mm)	1-1/2" (38 mm)	125	475	8.6" (218 mm)	3.5 (1.6 kg)

Foam Eductor & Nozzle Compatibility Chart

Eductor	Recommended Nozzle For Use with Eductors
203-60	366,372,366-BC,372-BC
203-95	366,367,368,369,372,366-BC,372-BC,373-BC,374-BC
203-125	366,367,368,369,372,366-BC,372-BC,373-BC,374-BC

