

Selectable Gallonage Nozzle

Style 369

- Combination pattern nozzle with versatile multiple flow settings
- Produces straight stream for maximum reach and superb wide fog pattern for optimum fire fighter protection
- Lightweight hardcoat anodized aluminium construction
- Available in tip only and shutoff / playpipe combinations
- Standard operating pressure at 100 psi (7 bar), optional 85 psi (6 bar) or 75 psi (5 bar)
- Minimal maintenance reflected in robust design, precision machining and quality materials
- Standard NH inlet or optional BIM / Machino / Storz inlets
- Compatible with Protek's foam aeration tubes
- Conforms to all aspects NFPA 1964 (Spray Nozzles, Shutoffs and Tips)



Raised lug for flashover fog pattern



Newly improved handle with two reinforced pieces on each side to prevent breakage

Specification


Style	Inlet Size	Length	Weight Lbs(kg)	Flow Settings	
				GPM	LPM
369	1-1/2" (38mm)	10.2" (259mm)	5.7 (2.6kg)	30-60-95-125-150-200	115-230-360-475-550-750



Selectable Gallonage Nozzle

Style 369

Unique Features On Protek Nozzles

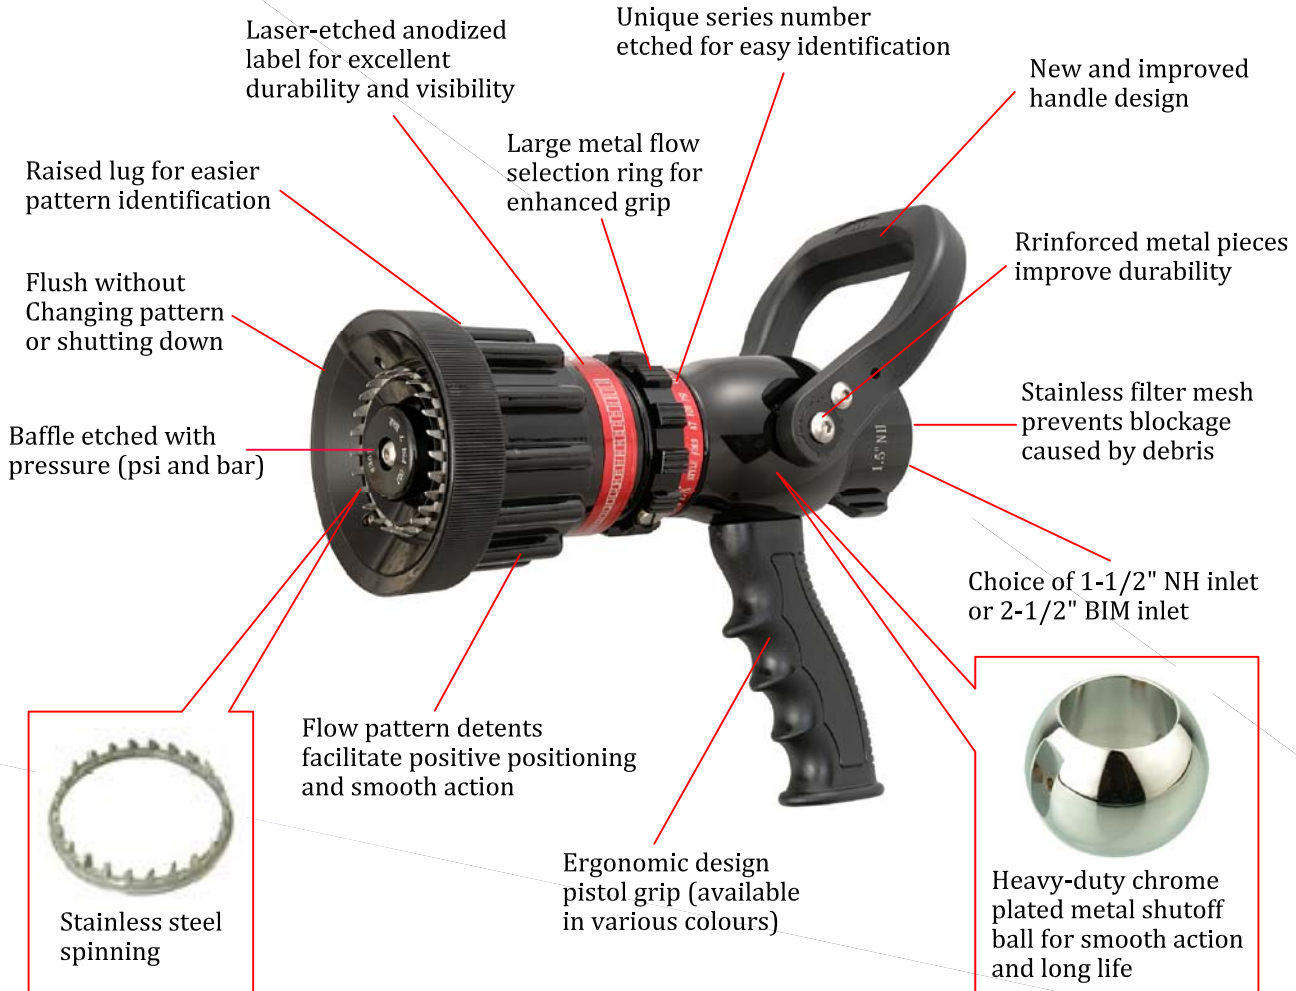

Laser-etched anodized label for excellent durability and visibility

Unique series number etched for easy identification

New and improved handle design

Raised lug for easier pattern identification

Large metal flow selection ring for enhanced grip

Rinforced metal pieces improve durability

Flush without Changing pattern or shutting down

Stainless filter mesh prevents blockage caused by debris

Baffle etched with pressure (psi and bar)

Choice of 1-1/2" NH inlet or 2-1/2" BIM inlet

Flow pattern detents facilitate positive positioning and smooth action

Ergonomic design pistol grip (available in various colours)

Stainless steel spinning

Heavy-duty chrome plated metal shutoff ball for smooth action and long life

