


Product data sheet

Status: 18.12.2020 | 05:36

Item no. 3755

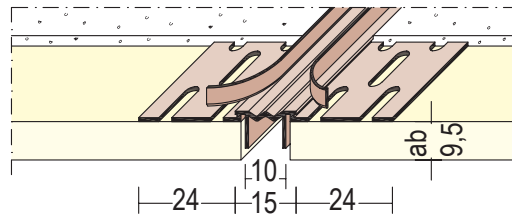

Designation	Expansion joint profile for dry lining 9,5 mm PB, surface
Description	White PVC movement joint profile with a flexible PVC centre, including two stop ridges, specially designed to facilitate easy installation on flat surfaces. Fitted with two detachable safety strips to protect the centre part. For producing movement joints in walls or ceilings according to the requirements of DIN 18181. Apply plaster to the entire surface on both sides of the profile up to the flexible PVC centre and apply clips. IMPORTANT! PVC central piece offers limited possibilities for applying suitable coatings. Approval is required from the coating material manufacturer.
Line of Business	Plaster
Productclass	Accessory profiles for drylining purposes
Productgroup	Expansion / Movement joint profiles
Plaster thickness	1,0 mm
Material	Rigid PVC with soft PVC
GK/Plate	ab 9,5 mm
Product length	305,0 cm
Motion recording train / print	+/-2 mm
Productcolor	■ weiß (10)
Packaging Unit	25 BAR / 63 CAR

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!

PROTEKTORWERK
Florenz Maisch GmbH & Co. KG
Postfach 1420, D-76554 Gaggenau
Viktoriastr. 58, D-76571 Gaggenau

Tel. +49 7225 977-0
Fax +49 7225 9 77- 111
info@protektor.com
www.protektor.com

