



## 2" GEO / GROUND GRID (Load Class A) Gravel fill

Geo / Ground Grid (art.8750)

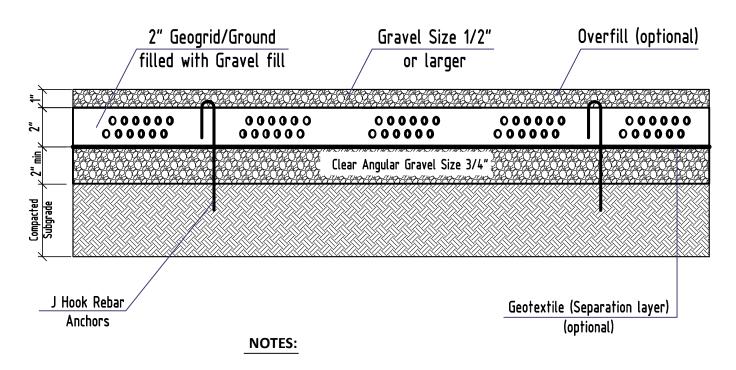

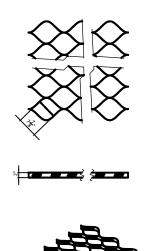

- 1. 2" geo / ground grid system should be installed in accordance with the manufacturer's instructions and recommendations.
- 2. The manufacturer's technical consultation may be required to determine the correct load class.
- 3. The drawing of installation for the 2" geo / ground grid system is not an official guideline, but is a recommendation.
- 4. Layers shown in cross-section need to be compacted.
- 5. Geo-textile is to be used for stability and to prevent mixing between layers.
- 6. We recommend anchors on each corner of the grid, and throughout the perimeter. Needed on sloped installations, mostly.
- 7. Follow for updates to the instructions and recommendations on the website vodaland.ca

## **Application**

walkways, stone paver base, gravel yards, patios, erosion control up to 10 degrees

UNLESS OTHERVISE SPECIFIED  DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH							DEBURR AND Break Sharp Edges		DO NOT SCALE DRAVING	REVISION		
TOLERAN LINE ANGU	CES: Arb						FIREZ					
	NAME	SIGN	IATURE	DATE				TITLE				
DRAVN								l				
CHK'D								2" geo / ground grid (Load Class A)		is A)		
APPVD								_ 800, 800000 8000 (2000		(	,	
APPV'D								<u> </u>				
					MATERIAL:			ARTICLE:				
					Plastic		<b>C</b>	ı	8750			
				$I^{-}$		,		$I^{I}$				