


8" GEOCELL (Load Class A-D) Gravel fill

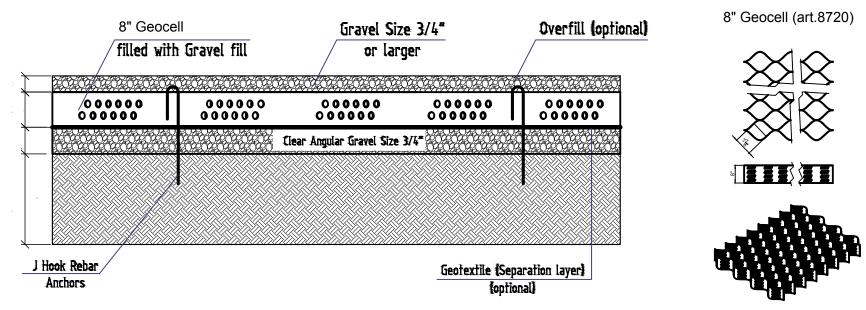

NOTES:

- 1. Please note, to be able to drive on this system, it must be filled with 3/4 inch gravel or larger.
- 2. 8" geocell system should be installed in accordance with the manufacturer's instructions and recommendations.
- 3. The manufacturer's technical consultation may be required to determine the correct load class.
- 4. The drawing of installation for the 8" geocell system is not an official guideline, but is a recommendation.
- 5. Layers shown in cross-section need to be compacted.
- 6. Geo-textile is to be used for stability and to prevent mixing between layers.
- 7. We recommend anchors on each corner of the grid, and throughout the perimeter. Needed on sloped installations, mostly.
- 8. Follow for updates to the instructions and recommendations on the website vodaland.ca

Application

heavy duty driveways/parking, retaining walls, high traffic areas, heavy shed base, swim spa/pool base, extreme slope erosion control up to 45 degrees

UNLESS OTHERVISE SPECIFIED BIDDISHONS ARE IN MULLIDETERS SURFACE FINANCES LINEAR MICLIAN MICLIAN MICLIAN MICLIAN							DEBURK AND BREAK SHARP ENGES	DO NOT SCALE BRAVING REVISION
	IME	210	MTURE	DATE				TITLE
DRAWAN								
CHK'D	מ							8" geocell (Load Class A-D)
EV9W] ' , , , , , , , , , , , , , , , , , ,
E'V994								
					MATERIAL)			ARTIOLE:
					I	Pasti	:	8720
					I			