
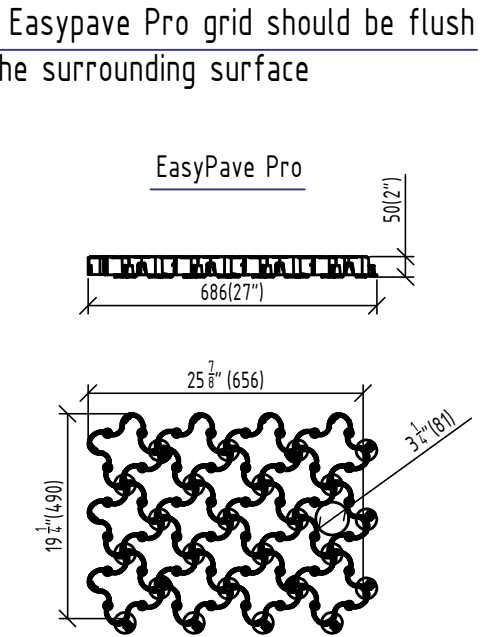
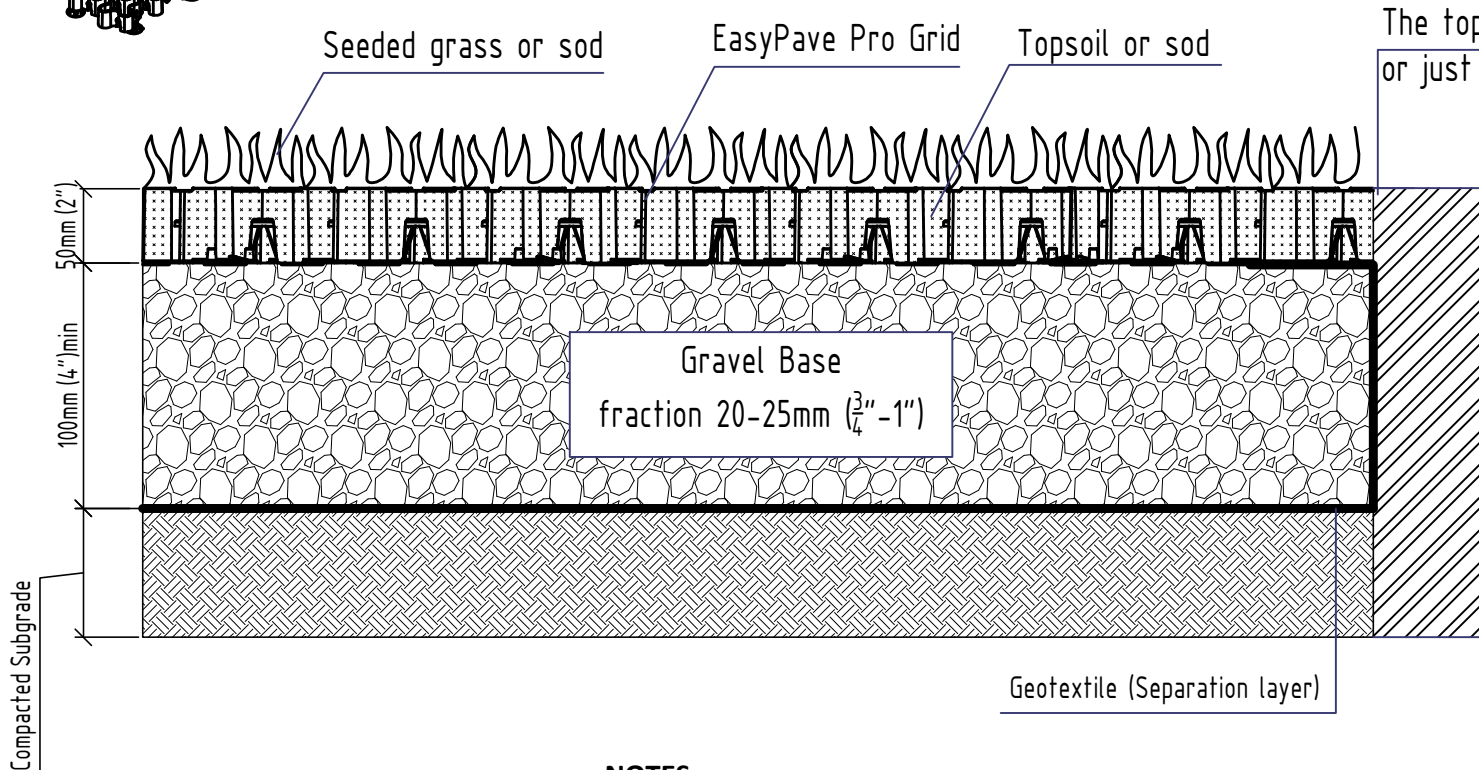


EasyPave Pro Grass fill (Medium Loads)



NOTES:

1. The base height shown in the cross-section depends on specific site and loading conditions.
2. Layers shown in cross-section need to be compacted.
3. Seeding: Fill the soil or growing area to the top of the grid. Apply seeding based on the instructions of the supplier.
4. Sodding: Fill Topsoil to half the height of the grid. Press sod within the grid so that the grid's top is leveled with the soil and roots. Only the grass's leaves should be extending above the grid.
5. Geo-textile is to be used for stability and to prevent mixing between layers.
6. Anchors are recommended for sloped installations. Please follow guidance of your local engineer for slope requirements.
7. This drawing is for conceptual design and information use only.

Application

Permeable Grass Parking lots, Parking Pads, Driveways, Erosion Control

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		FRESH	REWORK AND REUSE DUMP SIZES	DO NOT SCALE DRAWING	REVISION
SURFACE FINISH					
TOLERANCES: LINEAR ANGULAR					
ISSUED	NAME	SIGNATURE	DATE	TITLE	EasyPave Pro Grass fill (Medium Loads)
CHK'D					
APP'VD					
APP'VD					
			INTERNAL	ARTICLE	8103-BK
			Plastic		