


PERMEABLE PAVING GRID SYSTEM

PERMEABLE PAVING GRID, EASYpave PRO

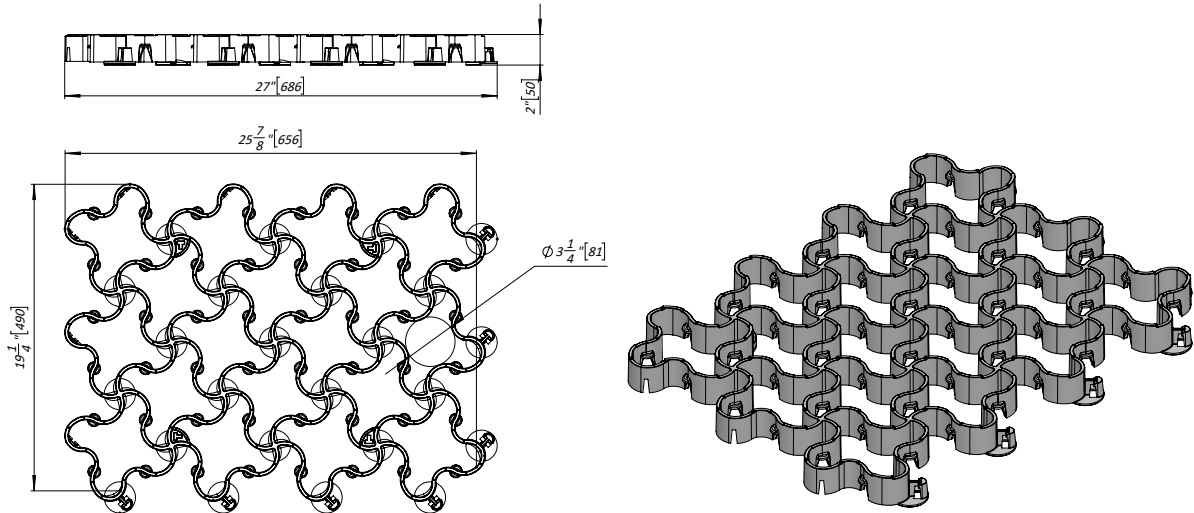

Technical Product information:

Dimensions:	24.7" (629mm) x 17.1"(434mm) x 2" (50mm) - (1 Unit)
Wall height:	2" (50mm)
Material:	100% recycled polypropylene
Load Class:	H20 based on AASHTO M306(Equivalent to Load Class D)
Temperature Range:	-40 deg C to +40 deg C
Colour:	Black
UV Protection:	UV Stabilizer Added
Moisture Absorption:	0.01%
Solubility:	Resistant to acids, alkalis, alcohols, oil, diesel, gasoline,(de-icing salt, ammonia, acid rain, etc)
Meeting Standard:	DIN 1072
Application:	Commercial parking lots, driveways with snow, truck yards, storage lots, roadways, fire lanes, military applications etc.
Backfill:	Any angular or round aggregate(stone) be used
Base:	Recommend size: 1/2" or smaller 3/4" Crush stone (Gravel)

Delivery:

Pallet Dimensions:	W48" x D40" x H78"
Quantity per pallet:	320 Unit
Weight per pallet:	1241 lbs (incl. pallet)
Coverage per unit:	3.5 sq.ft

*Deviation of mechanical properties of the material - unto +/- 10%

Product:

Description	Item #	Height	Length	Width
EasyPave PRO paving grid - Black	8103-BK	2" (50mm)	24.87"(656mm)	19.25"(490mm)

Accessories:

Description	Item #	Qty per pack	Weight
EasyPave Anchors	6842-10	10pcs	1.0 lb
Geotextile NT10 (18'x 12')	860110-183-2	1 pc	6.0 lb