


PERMEABLE PAVING GRID SYSTEM

PERMEABLE PAVING GRID, EASYpave

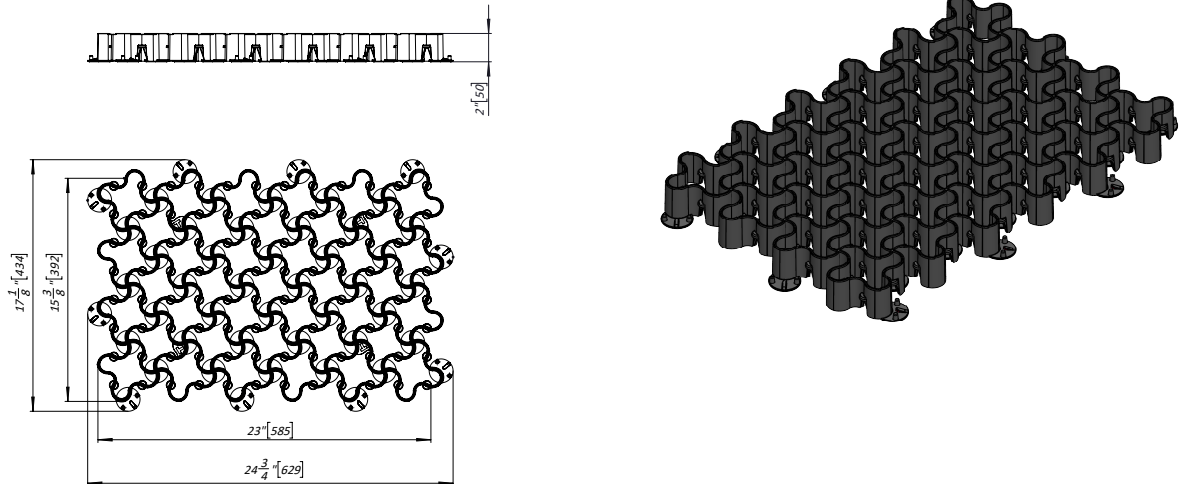

Technical Product information:

Dimensions:	24.7" (629mm) x 17.1"(434mm) x 2" (50mm) - (1 Unit)
Wall height:	2" (50mm)
Material:	100% recycled polypropylene
Load Class:	H20 based on AASHTO M306(Equivalent to Load Class D)
Temperature Range:	-40 deg C to +40 deg C
Colour:	Black, Green, Grey
UV Protection:	UV Stabilizer Added
Moisture Absorption:	0.01%
Solubility:	Resistant to acids, alkalis, alcohols, oil, diesel, gasoline,(de-icing salt, ammonia, acid rain, etc)
Meeting Standard:	DIN 1072
Application:	Parking lots, Driveways with snow, event parking, grass parking, erosion control, Patios, hot tub base, etc.
Backfill:	Any angular or round aggregate(stone) be used
Base:	Recommend size: 1/2" or smaller 3/4" Crush stone (Gravel)

Delivery:

Pallet Dimensions:	W48" x D40" x H84"
Quantity per pallet:	320 Unit
Weight per pallet:	985 lbs (incl. pallet)
Coverage per unit:	3 sq.ft

*Deviation of mechanical properties of the material - unto +/- 10%

Product:

Description	Item #	Height	Length	Width
EasyPave paving grid - Black	8100-BK	2" (50mm)	24.74"(629mm)	17.12"(434mm)
EasyPave paving grid - Green	8100-GN	2" (50mm)	24.74"(629mm)	17.12"(434mm)
EasyPave paving grid - Grey	8100-GY	2" (50mm)	24.74"(629mm)	17.12"(434mm)

Accessories:

Description	Item #	Qty per pack	Weight
EasyPave Anchors	6842-10	10pcs	1.0 lb
EasySpots Paver Marking system	68410-25-YW	25pcs	1.6 lb
Geotextile NT15 (18'x 12')	860115-183-2	1pc	6.0 lb