


**PERMEABLE PAVING GRID SYSTEM**

**PERMEABLE PAVING GRID, HEXpave**

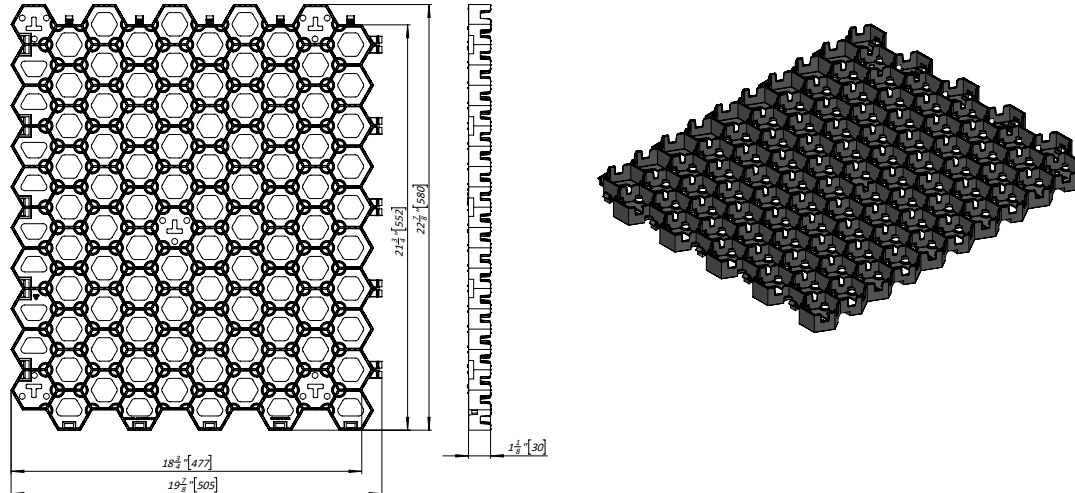

**Technical Product information:**

Dimensions:	22.8" (580mm) x 19.8"(505mm) x 1.1" (30mm) - (1 Unit)
Wall height:	1.1" (30mm)
Material:	100% recycled polypropylene
Load Class:	Load Class B
Temperature Range:	-40 deg C to +40 deg C
Colour:	Black
UV Protection:	UV Stabilizer Added
Moisture Absorption:	0.01%
Solubility:	Resistant to acids, alkalis, alcohols, oil, diesel, gasoline, (de-icing salt, ammonia, acid rain, etc)
Meeting Standard:	DIN 1072
Application:	Patios, pathways, shed bases horse paddocks, light vehicle parking areas, etc
Backfill:	Grass/sod, pea gravel/gravel, soil/sand
Base:	3/4" Crush stone (Gravel)

**Delivery:**

Pallet Dimensions:	W48" x D40" x H84"
Quantity per pallet:	488 Unit
Weight per pallet:	1000 lbs ( incl. pallet)
Coverage per unit:	3.15 sq.ft

\*Deviation of mechanical properties of the material - unto +/- 10%

**Product:**

Description	Item #	Height	Length	Width
HEXPave paving grid - Black	8102-BK	1.1" (30mm)	22.87" (580mm)	19.87" (505mm)

**Accessories:**

Description	Item #	Qty per pack	Weight
EasyPave Anchors	6842-10	10pcs	1.0 lb
Geotextile NT10 (18'x 12')	860110-183-2	1 pc	6.0 lb