


Oil and water Separator OilBase100 - 10(160)/50(800) (S 1:25)

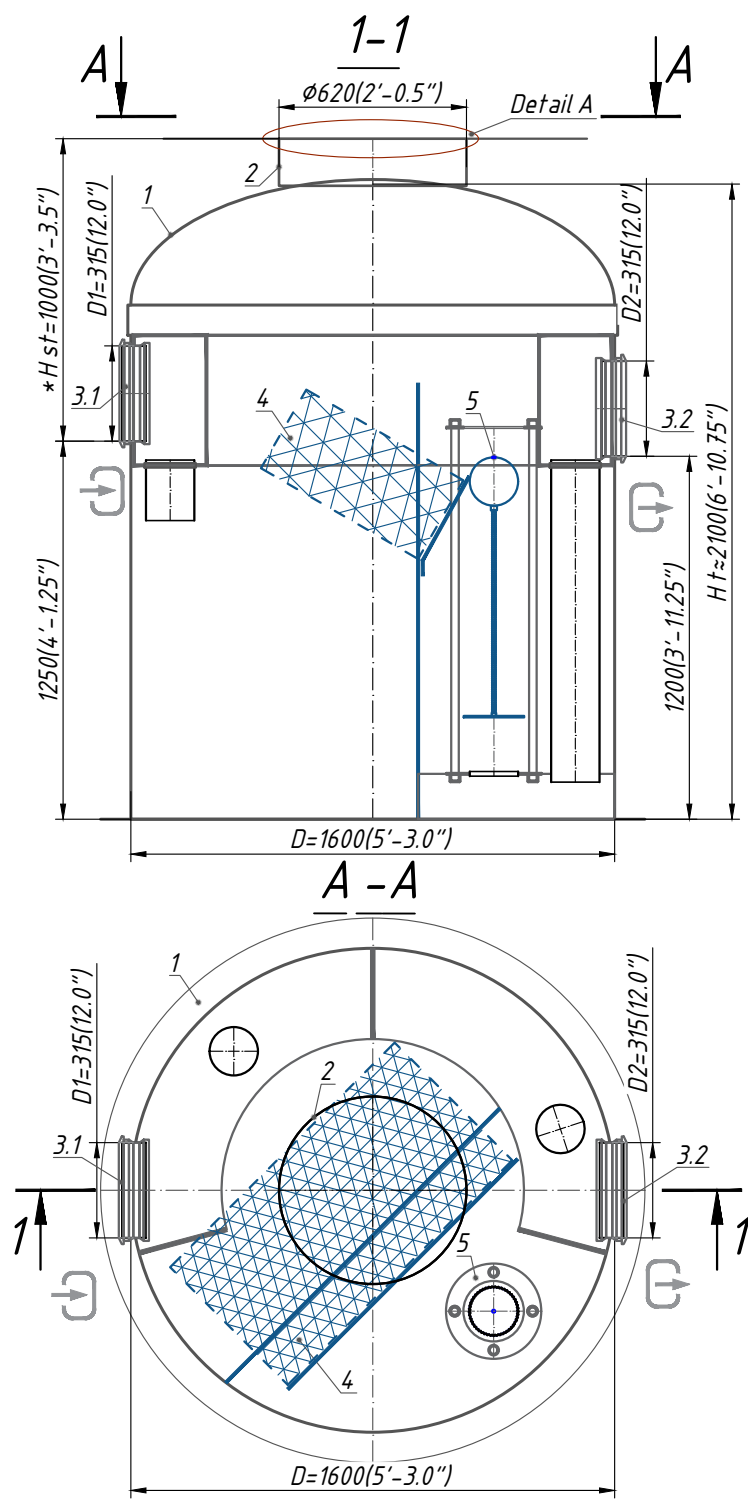


Specification of materials and equipment. Standard equipment ** (Tabl. 1)


Pos.	Identification	Name	Q-ty	Mass pc.,kg	Note
1	Vodaland	Oil and water Separator Vodaland OilBase100 - 10(160)/50(800), disch. 10 l/s or 160gmp, (50 l/s or 800gmp -ByPass) fiberglass, D= 1600 (5'-3.0\"), Ht≈ 2100 mm (7'-4.5\")	1	330	compl.
2		Inspection manhole Ø620 (2'-0.5\")	1		compl.
3.1,3.2	D1-Inlet / D2-Outlet	Pipe for connection Ø 315 (12.0\")	2		compl.
4		Coalescent block	1		compl.
5		Automatic locking device 160(6,0\")	1		compl.
		Volume of light liquids	130		gal
		Volume of sludge trap	265		gal

**The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information

Standard equipment

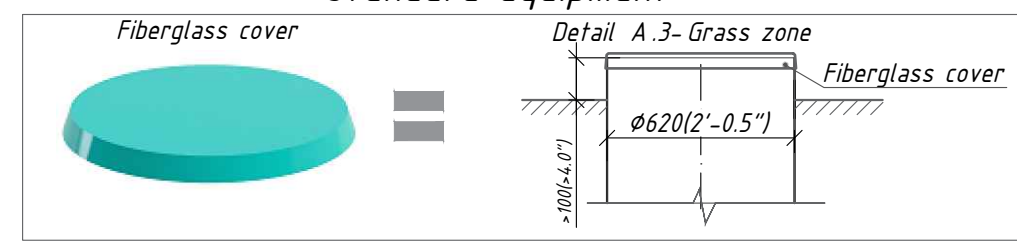

Additional equipment

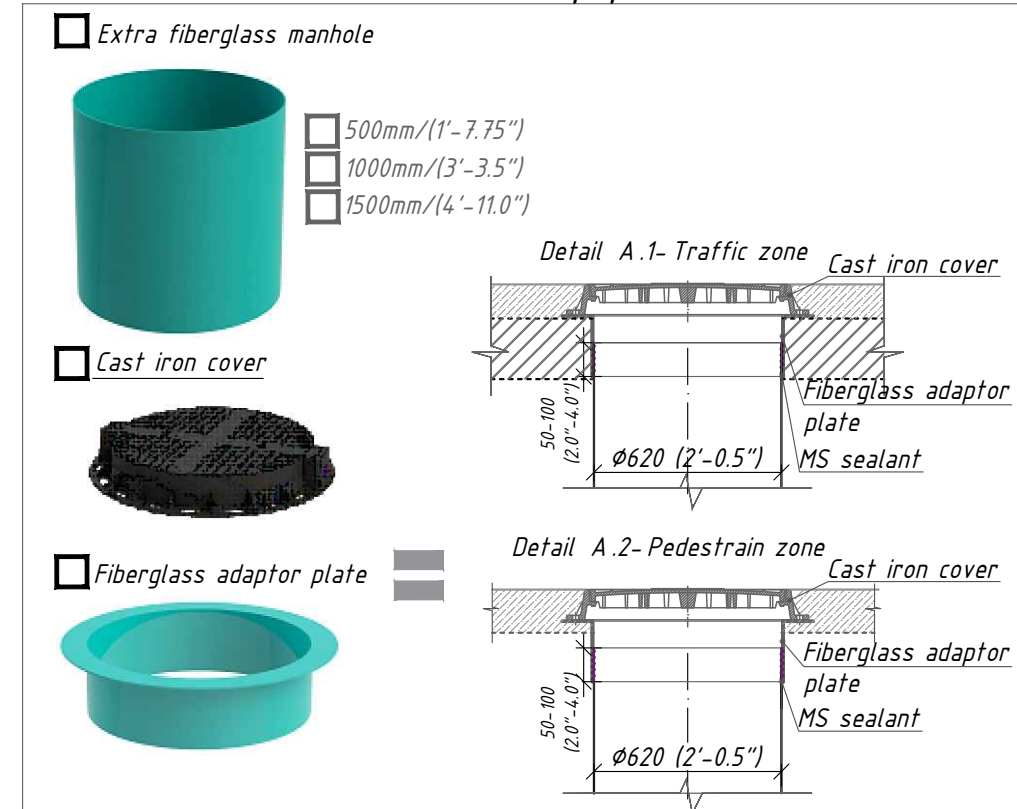

Note:
 *H-depth of the inlet connection (in standard equipment H up to 1000 mm. H take a multiple of 50mm.
 **The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information. The complete set of the product is agreed with the manager.
 ***The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole.
 Permissible deviation during production of products is 1-3%.

Additional Information:

Oil and water Separator OilBase100 - 10(160)/50(800)		Vodaland Canada Inc. 5900 Ambler Drive, Unit 1 & 2, Mississauga, ON L4W 2N3 +1 (905) 238 1771
Factory ID:	OB1- 10/50	
manufactured by FIBERICA Ukraine, Cherkasy city, 18028	distributed by VODALAND	