


FLOOR DRAIN FD 250SS - LOAD CLASS C250

10" X 10" (251 X 251mm) STAINLESS FLOOR DRAIN

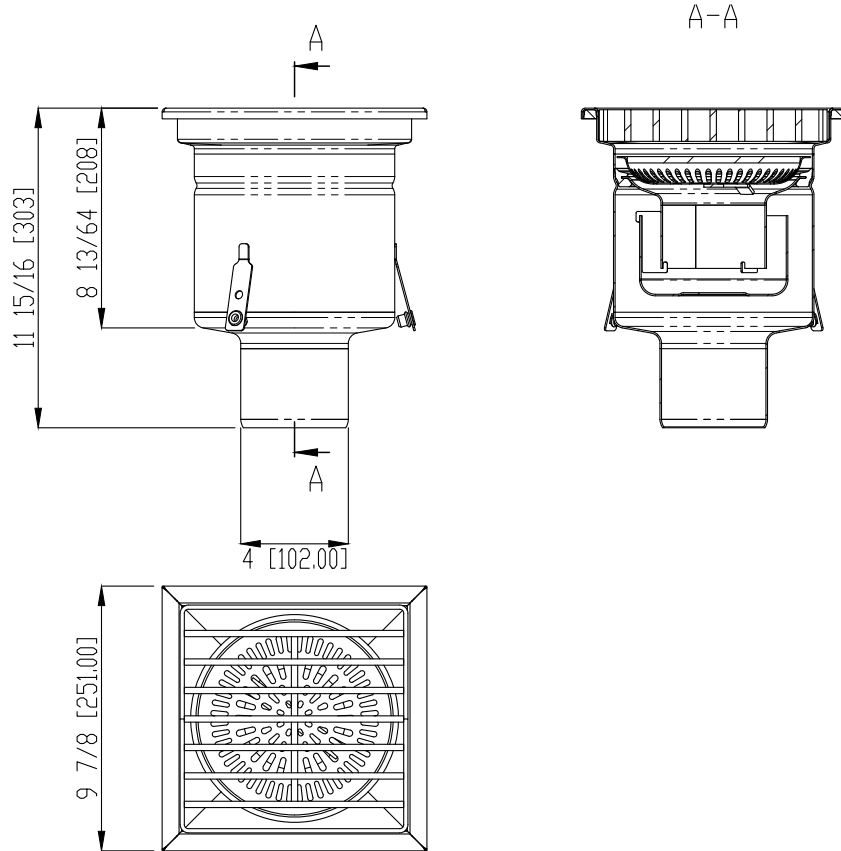

General: Floor drain shall be Vodaland Canada FD 250SS Floor Drain as manufactured by Vodaland or approved equal.

Specification: Vodaland FD 250SS floor drain with removable debris basket and Hydro lock system (to prevent backflow of sewage gasses) shall be made from high grade 304 stainless steel with perforated grate design. Floor drain shall be a 10" (251 mm) square, 11.9" (303mm) overall width and a 4.00" (102 mm) outer diameter outlet. Rubber gasket under the flange of the floor drain ensure stability and helps to minimize risk of floor cracking. Floor drain assembly shall withstand a required EN1433 Load class.

Materials: FD 250SS Floor drain shall be manufactured from High grade 304 Stainless steel

Water absorption	N/A
Frost proof	Yes
Chemical, Acid & Corrosion resistant	Yes
Salt proof	Yes
ADA Compliant	Yes

Notes:

1. Floor drain has a Ø100mm bottom outlet.