



# Installation Instructions:

(Part # SB76896)

07-13 Jeep JK Atlas Rear Bumper w/  
Tire Gate

Parts Included	Qty	Parts Included	Qty
<b>S/B76896-01</b>		1/4"-20 BLACK HEX NUT	2
<b>93-9191 ATLAS REAR BUMPER</b>	<b>1</b>	<b>90-6912 HARDWARE PACK:</b>	<b>1</b>
<b>90-6910 HARDWARE PACK: Rear Bumper</b>	<b>1</b>	3/8" X 1" BLACK SOCKET HEAD BOLT	2
1/2" X 1 1/2" HEX BOLT GR. 8	4	3/8" NYLOCK NUT	2
1/2" HARDENED FLAT WASHER	4	3/8" USS FLAT WASHER	2
7/16" X 4 1/2" GR. 8 HEX BOLT	4	<b>90-6913 HARDWARE PACK: Wheel Mount</b>	<b>1</b>
7/16" USS FLAT WASHER	8	3/8" X 1" HEX HEAD BOLT GR. 8	5
7/16" SPLIT LOCK WASHER	4	3/8" STOVER NUT	5
7/16" HEX FINISH NUT	4	3/8" HARDENED FLAT WASHER	10
<b>S/B76896-02</b>		<b>90-6914 HARDWARE PACK: Main Pin</b>	<b>1</b>
<b>93-9215 TIRE GATE</b>	<b>1</b>	1/2" X 6 1/2" HEX BOLT GR. 8	1
<b>90-4536 MAIN PIN</b>	<b>1</b>	1/2" USS FLAT WASHER	1
<b>90-9214 CAM WHEEL</b>	<b>1</b>	<b>90-6915 HARDWARE PACK: Light Tab</b>	<b>1</b>
<b>90-3925 NUT PLATE: Rear Bumper</b>	<b>2</b>	3/8" X 1" HEX HEAD BOLT GR. 8	2
<b>93-9182 LIGHT TAB</b>	<b>2</b>	3/8" STOVER NUT	2
<b>93-9183 WHEEL MOUNT STATIONARY BRACKET</b>	<b>1</b>	3/8" USS FLAT WASHER	4
<b>93-9187 WHEEL MOUNT ADJUSTABLE BRACKET</b>	<b>1</b>	<b>90-6916 HARDWARE PACK: Cam Wheel</b>	<b>1</b>
<b>90-4537 STRIKER PIN</b>	<b>1</b>	3/8" X 3/4" BLACK ALLEN HEAD BOLT	1
<b>90-4552 BILLET CAM WHEEL CAP</b>	<b>1</b>	<b>90-6917 HARDWARE PACK: Trail Jack</b>	<b>1</b>
<b>90-9285 MAIN PIN NUT PLATE</b>	<b>1</b>	<b>93-9288 TRAIL JACK MOUNT</b>	<b>2</b>
<b>90-9287 STAINLESS PIN WASHER</b>	<b>2</b>	020110 U-BOLT: 5/16" X 2 1/2" X 3 3/16"	2
<b>93-9241 3RD BRAKE LIGHT LOWER BRACKET</b>	<b>1</b>	5/16" NYLOCK NUT	4
<b>93-5567 3RD BRAKE LIGHT UPPER BRACKET</b>	<b>1</b>	5/16" SAE FLAT WASHER	4
<b>90-4560 WHEEL MOUNT STUD: 1/2"-20</b>	<b>3</b>	1/2" X 1 1/4" GR. 8 HEX BOLT	2
<b>90-4219 LUG NUTS: 1/2"-20</b>	<b>3</b>	1/2" USS GR.8 FLAT WASHER	2
<b>90-6911 HARDWARE PACK: Wheel Mount Brkt</b>	<b>1</b>	1/2" SPLIT LOCK WASHER	2
1/2" X 1" HEX BOLT GR. 8	4	<b>90-6925 HARDWARE PACK:</b>	<b>1</b>
1/2" HARDENED FLAT WASHER	8	5/16" X 1" SOCKET ALLEN HEAD BOLT	3
1/2" STOVER NUT	4	<b>S/B RATCHET STRAP</b>	<b>2</b>
<b>90-6932 HARDWARE PACK: 3rd Brake Light</b>	<b>1</b>	<b>90-6931 HARDWARE PACK: Striker Pin</b>	<b>1</b>
1/4"-20 X 1/2" BLACK BUTTON HEAD BOLT	2	7/16" X 1" HEX NUT Gr. 8	1
1/4" BLACK USS FLAT WASHER	2	7/16" SAE FLAT WASHER Gr. 8	1



## Installation Instructions:


(Part # SB76896)

### 07-13 Jeep JK Atlas Rear Bumper w/ Tire Gate

**Step 1:** Unbolt and remove the OE rear bumper, hitch, and from the vehicle. These items will not be reused.

**Step 2:** Unclip the 3rd brake light wiring harness. Unbolt and remove the 3rd brake light housing from the vehicle.


**Step 3:** Install the (2) nut plates (90-3925) into the rear frame rails and align the nuts with the outer slots in the frame. (Fig A)

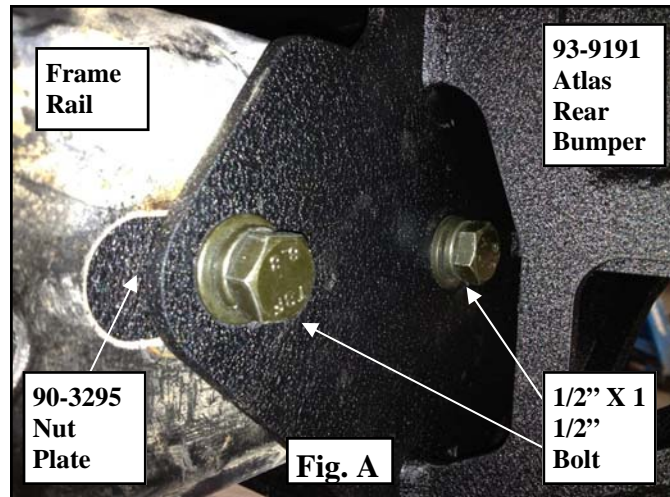

**Step 4:** Carefully raise the Atlas rear bumper (93-9191) against the outer frame rails. Secure to the outer frame rails and previously installed nut plates (90-3925) using the (4) supplied 1/2" X 1 1/2" bolts and washers. Leave the bolts loose at this time. (Fig A)

**Step 5:** Install the (4) 7/16" X 4 1/2" bolts and hardware through the rear crossmember and into the bumper hitch. (Fig B)

**NOTE:** Use the window in the hitch to access and tighten the 7/16" hardware.

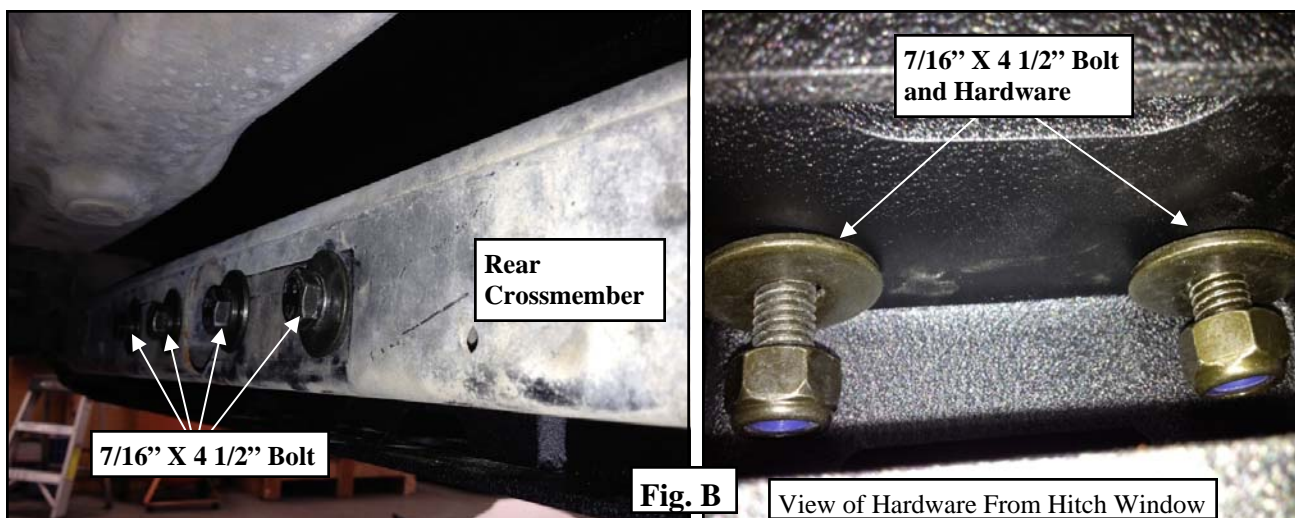

**Step 6:** Torque the 7/16" bumper hardware to 55 ft./lbs. and 1/2" hardware the 80 ft./lbs. (Fig B)

**For Technical Support/Warranty Information please call 310-762-9944**




## Installation Instructions:

(Part # SB76896)


### 07-13 Jeep JK Atlas Rear Bumper w/ Tire Gate

**Step 7:** Install the striker pin (90-4537) using the 7/16" hardware from pack (90-6931) onto the driver side of the Atlas rear bumper (93-9191). Torque the 7/16" hardware to 55 ft./lbs. (Fig C)

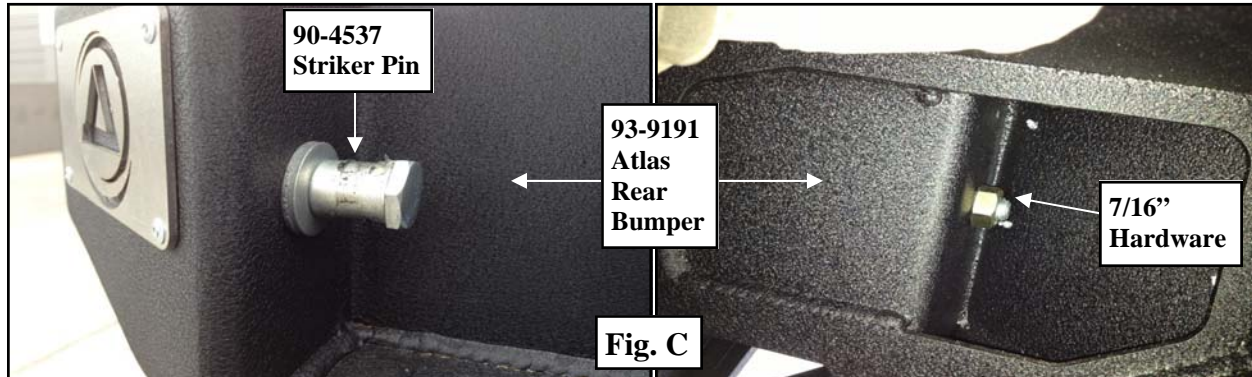

**Step 8:** Grease the hole in the tire gate (93-9215), the main pin (90-9214), the surface the gate sits on, and the location that the adjustment cam rides on. (Fig E)

**Step 9:** Carefully raise and install the tire gate (93-9215) into the mounting pocket in the Atlas rear bumper. Insert (1) stainless pin washer (90-9287) under the tire gate. If there is additional room you may insert an additional stainless pin washer (90-9287) to close the gap. (Fig D)

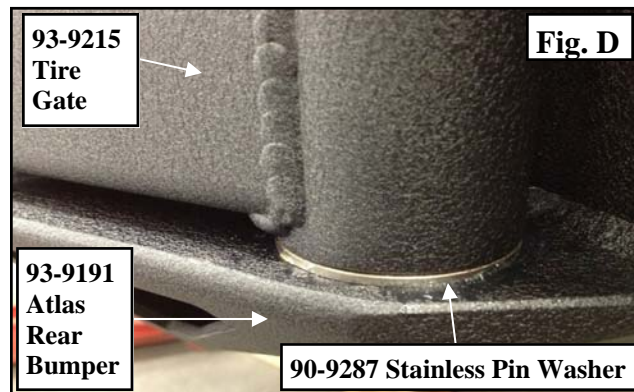

**Step 10:** Slide the main pin (90-9214) down through the hole in the Atlas rear bumper, stainless pin washer(s), tire gate, and into the lower bumper. Do not tighten at this time. (Fig E) **NOTE:** The pin will be installed with the reduced shoulder on top.



For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220




## Installation Instructions:

(Part # SB76896)

### 07-13 Jeep JK Atlas Rear Bumper w/ Tire Gate


**Step 11:** Close the tire gate. Install the cam wheel (90-6919) over the main pin shoulder. Install the 1/2" X 6 1/2" bolt and washer through the main pin into the (90-9285) main pin nut plate. Do not tighten at this time. (Fig F)

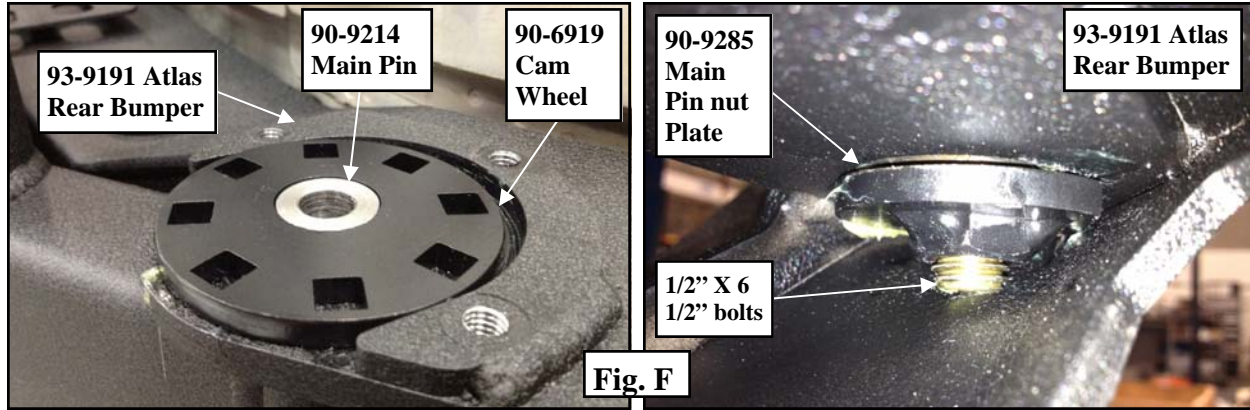

**Step 12:** Using the vehicle spare tire as a guide, set the adjustable wheel mount adjustable bracket (93-9187) on the backside of the rim mounting surface. Determine the bolt pattern by matching up the corresponding holes. Mark the holes that apply to your bolt pattern. (Fig A) **NOTE:** *The wheel mount plate is fully adjustable to accommodate multiple bolt patterns for future axle upgrades.*

**Step 13:** Install the wheel mount studs (90-4560) into the adjustable wheel mount plate. **NOTE:** *The studs may be pressed into place or drawn in by tightening the washer and nut.*

**Step 14:** Assemble the wheel mount bracket (adjustable bracket 93-9187 & stationary bracket 93-9183) using the supplied (5) 3/8" X 1" bolts and hardware. Leave the bolts loose at this time. Lay the spare tire face down on the ground and install the wheel mount bracket temporarily onto the spare tire. (Fig. G)

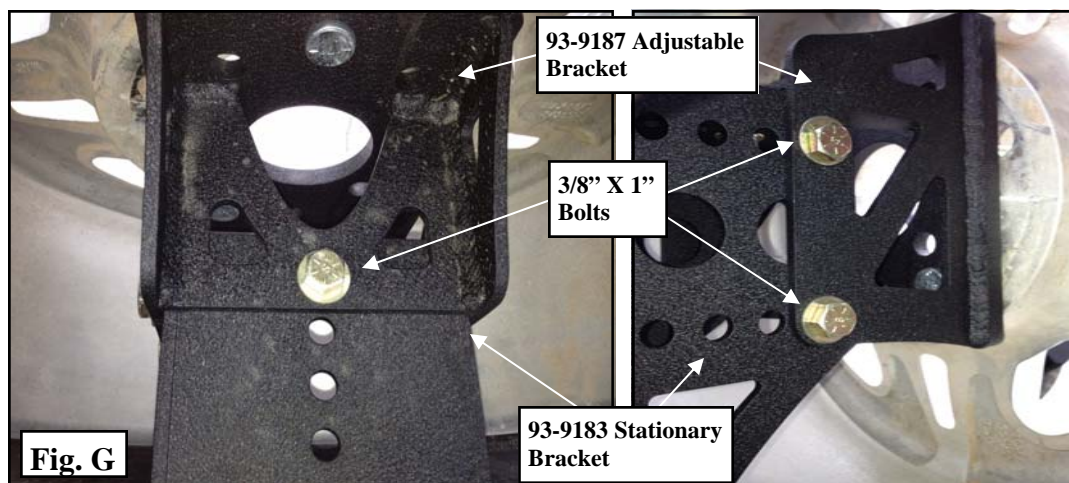

**Step 15:** With the spare tire face down, lay a ruler or a flat bar across the tire and adjust the wheel mount bracket assembly until the base makes contact with the ruler or flat bar. Torque the wheel mount bracket assembly bolts according to the chart on page 11. (Fig. H) **NOTE:** *The assembled bracket may not line up perfectly with the straight edge.*


**For Technical Support/Warranty Information please call 310-762-9944**



## Installation Instructions:

(Part # SB76896)


07-13 Jeep JK Atlas Rear Bumper w/  
Tire Gate

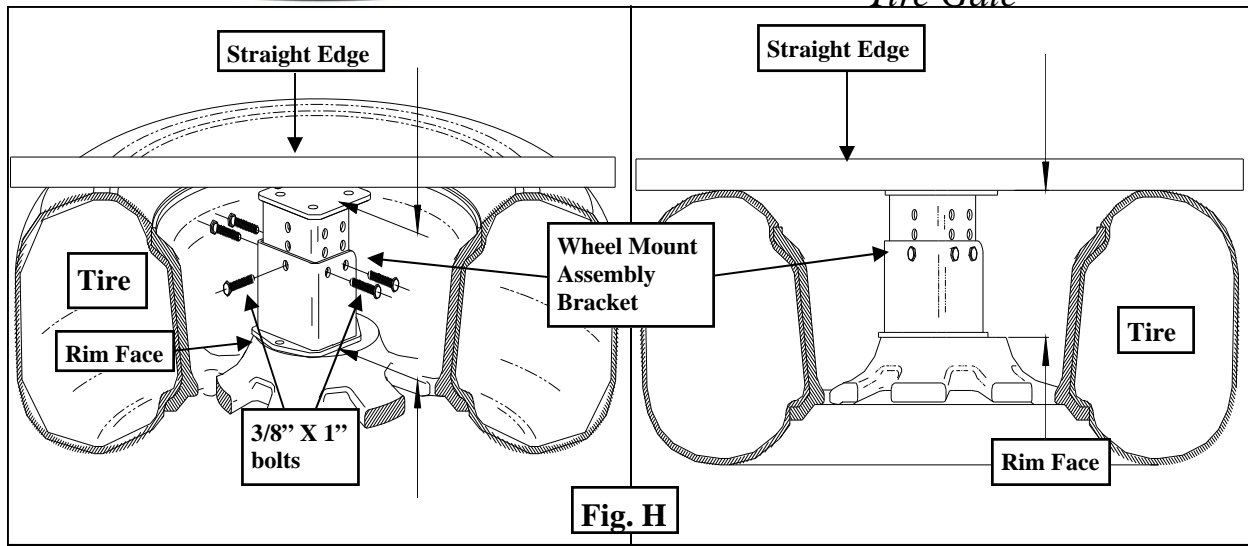

**Step 16:** Install the wheel mount bracket assembly onto the tire gate assembly using the (4) supplied 1/2" X 1" hardware. Torque 1/2" hardware to 80 ft./lbs. (Fig. I)

**NOTE:** The size of the spare tire will determine the mounting height of the bracket. If possible, it is better to have the tire fit tighter against the straight edge/tire gate to avoid excess vibration.

**TIP:** For off-road applications, raise the tire position for more departure angle. For street driven applications, lower the tire position for greater rear window vision.

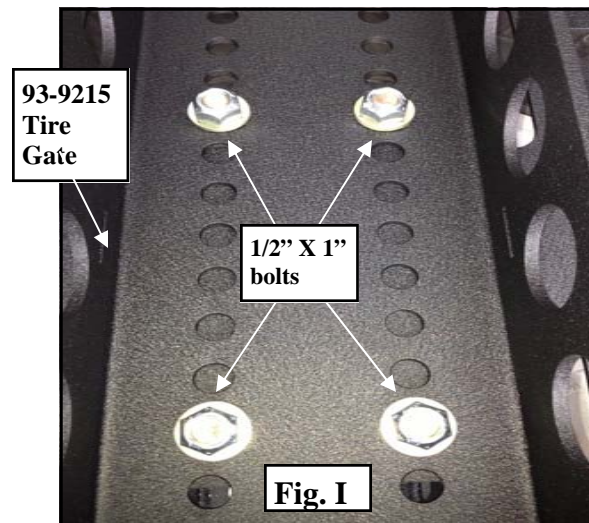

**Step 17:** Very carefully, close the tire gate assembly and watch for tire gate clearance over top of the bumper. **NOTE:** Be careful not to scratch the top of the bumper.

**Step 18:** Install the spare tire to the tire mount bracket assembly using the supplied (3) 1/2"-20 lug nuts (90-4219). Torque to 65 ft./lbs.

**Step 19:** If a third brake light is being used, install the third brake light upper bracket (93-5567) into the third brake light lower bracket (93-9241). Secure using the (2) supplied 1/4"-20 X 1/2" black button head bolts and hardware through the slots. (Fig. J)


**For Technical Support/Warranty Information please call 310-762-9944**




## Installation Instructions:

(Part # SB76896)

07-13 Jeep JK Atlas Rear Bumper w/  
Tire Gate

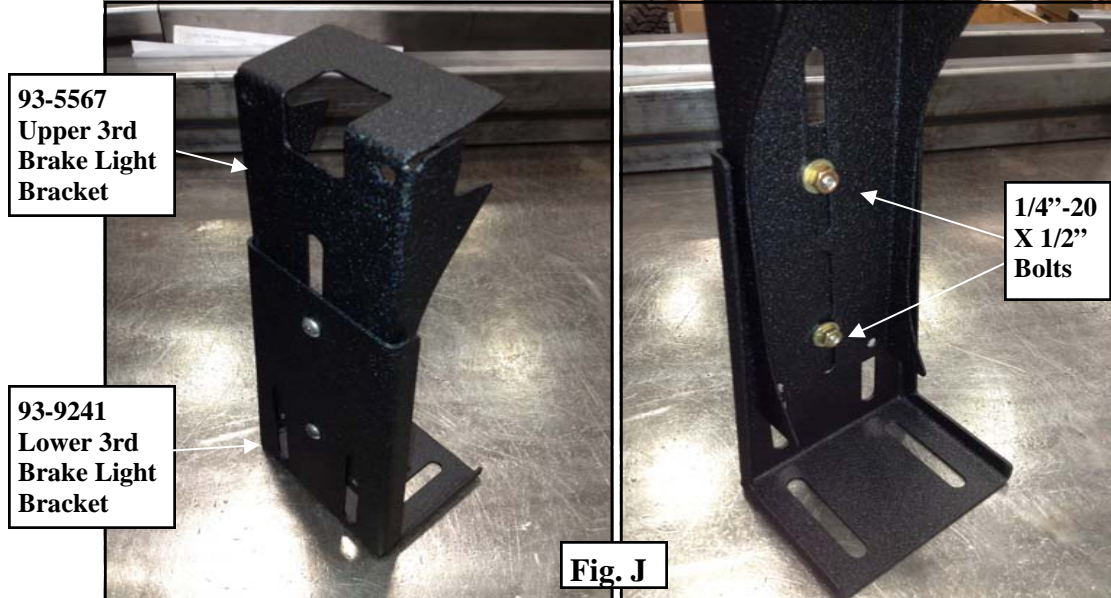

**Step 20:** Remove the (2) OE screws from the OE plastic third brake light assembly. Install the OE front plastic panel and lens into the new third brake light assembly using the (2) previously removed OE screws. (Fig. K)

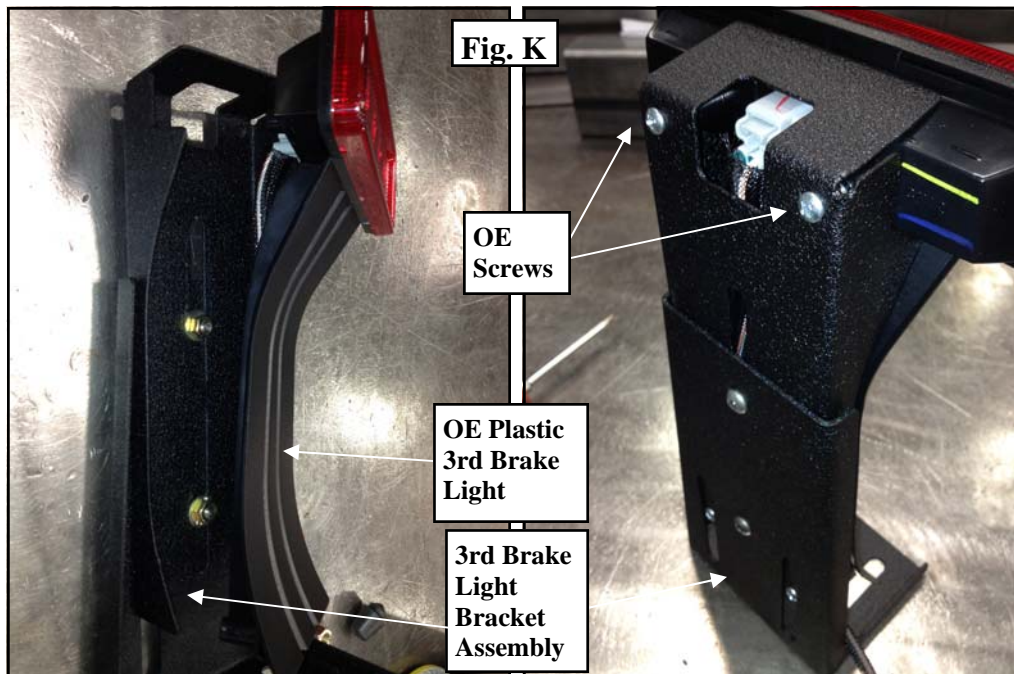

**Step 21:** Secure the third brake light bracket (93-5663) assembly to the top of the tire gate assembly using the supplied (2) 3/8" X 1" black Allen head bolts and hardware. (Fig. L)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220



## Installation Instructions:

(Part # SB76896)

07-13 Jeep JK Atlas Rear Bumper w/  
Tire Gate

**Step 22:** Extend the 3rd brake light wiring harness to the passenger side hinge, then up the tire gate. This can simply be done by splicing the wire and using some insulated butt splice connectors and 18 gauge wire, extend the wire to the appropriate length. It is recommended to have this done by an experienced electrical installer. **(Fig. L)**



**Step 23:** Install the (1 per side) light tabs (93-9182) to the mounting holes in the tire gate. Secure using the (1 per side) supplied 3/8" X 1" bolts and hardware. **(Fig. L)**

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220




## Installation Instructions:


(Part # SB76896)

### 07-13 Jeep JK Atlas Rear Bumper w/ Tire Gate

**Step 24:** If you are installing a trail jack, secure the jack mounting brackets (93-9288) to the upper tube of the tire gate using the (2) 5/16" U-bolts and hardware. (Fig. M)

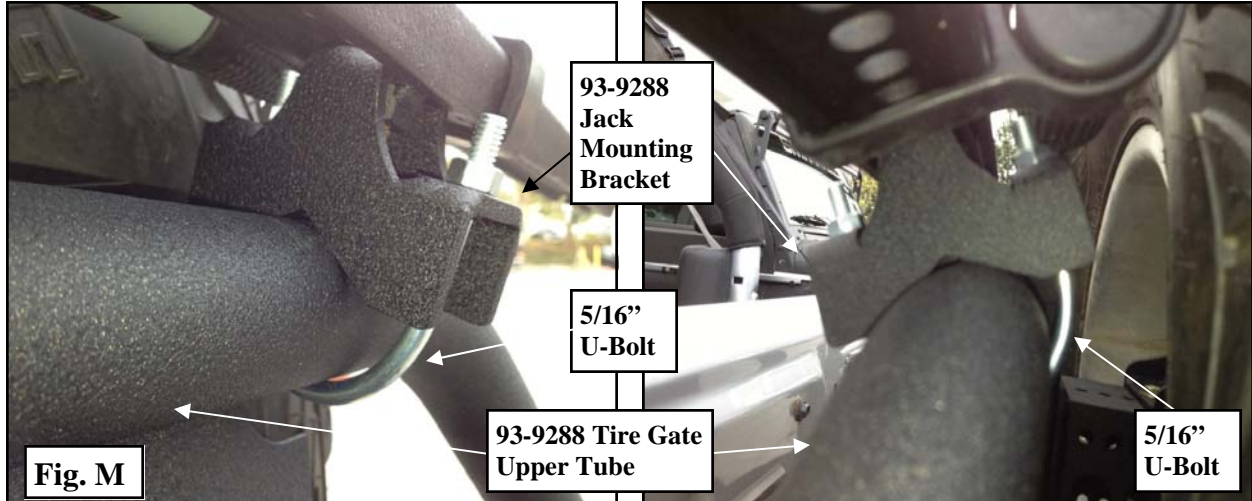

**Step 25:** Install the trail jack to the previously installed jack mounts using the (2) supplied 1/2" X 1 1/4" bolts and washers. Check that the tire gate assembly opens fully and that the jack does not contact the body of the jeep. Torque the 5/16" U-bolt hardware to 25 ft./lbs and the 1/2" hardware to 55 ft./lbs. (Fig. N)

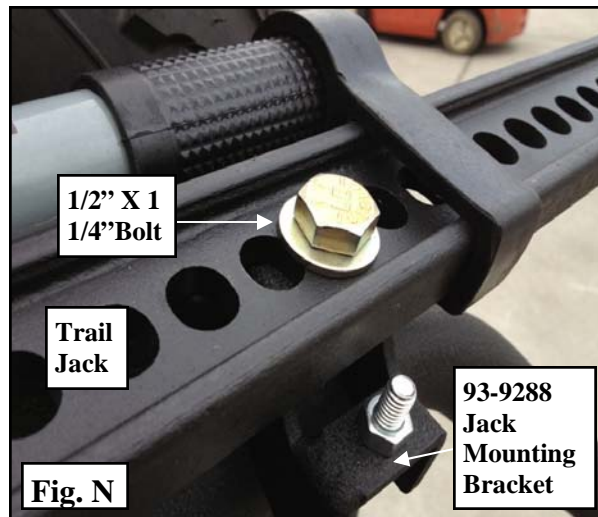

**Step 26:** If you are installing a gas cans, install the gas cans with the spouts facing toward the outside of the tire gate, using the supplied ratchet straps. Lace the ratchet strap through the tire gate slots according to figure O. (Fig. O)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220







## Installation Instructions:

(Part # SB76896)

07-13 Jeep JK Atlas Rear Bumper w/  
Tire Gate

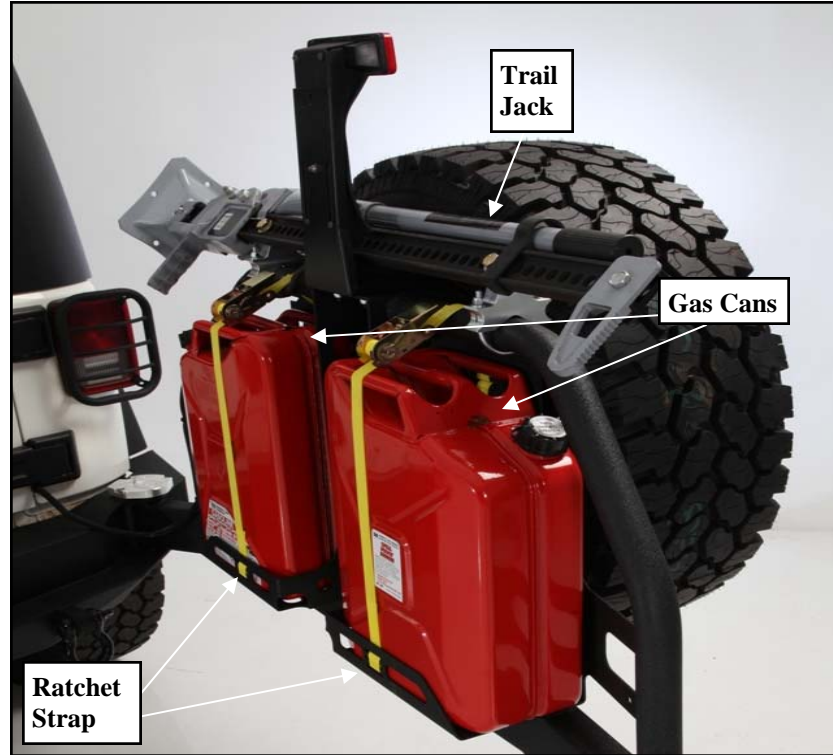

**Step 27:** With the tire gate fully loaded, adjust the cam wheel (90-9214) to make sure gate closes properly. Using a  $3/8$ " ratchet, insert the ratchet into the cam wheel and rotate the cam wheel until it lifts the weight of the gate. Inspect and ensure the latch and striker mate properly. Once the striker and latch are aligned properly, install the  $3/8$ " X  $3/4$ " black Allen head bolt through the window in the cam wheel to lock it in place. Torque the  $3/8$ " bolt to 18 ft./lbs. (Fig. P)

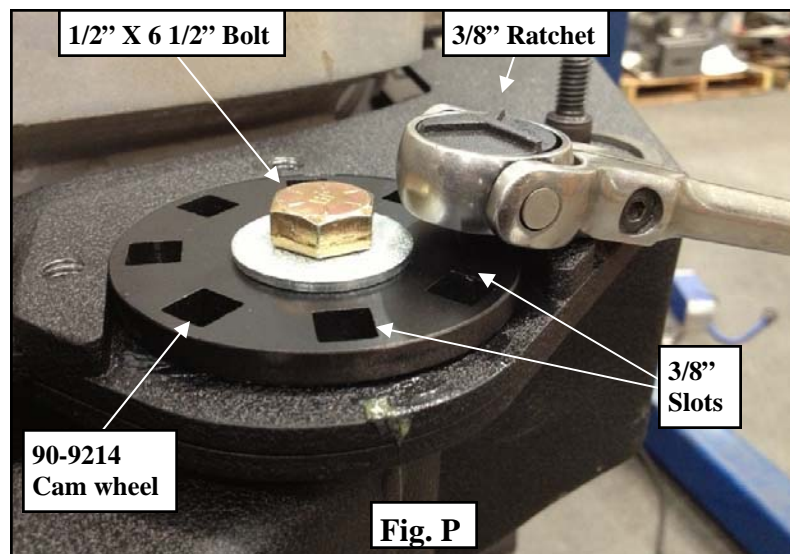

**Step 28:** Torque the previously installed  $1/2$ " X  $6 1/2$ " bolt to 80 ft./lbs. (Fig. P)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220




## Installation Instructions:

(Part # SB76896)

07-13 Jeep JK Atlas Rear Bumper w/  
Tire Gate

**Step 29:** Install the billet cam wheel cap (90-4552) using the (3) supplied 5/16" X 1" stainless steel Allen head bolts. Torque 5/16" hardware to 10 ft./lbs. (Fig. Q)

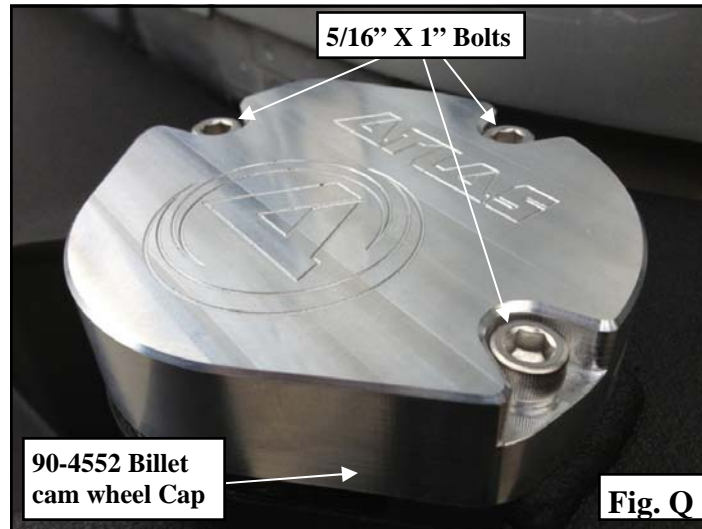

**Step 30:** Installation of the Atlas rear bumper and tire gate is now complete. (Fig. R)



For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220



## Installation Instructions:

(Part # SB76896)

07-13 Jeep JK Atlas Rear Bumper w/  
Tire Gate

Use this only as a guide for hardware without a called out torque specification in the instruction manual.

Bolt Torque and ID						
Decimal System			Metric System			
All Torques in Ft. Lbs. Maximums						
Bolt Size	Grade 5	Grade 8	Bolt Size	Class 9.8	Class 10.9	Class 12.9
5/16	15	20	M6	5	9	12
3/8	30	45	M8	18	23	27
7/16	45	60	M10	32	45	50
1/2	65	90	M12	55	75	90
9/16	95	130	M14	85	120	145
5/8	135	175	M16	130	165	210
3/4	185	280	M18	170	240	290

<p>1/2-13x1.75 HHCS  <span style="display: inline-block; border: 1px solid black; padding: 2px;">D</span> <span style="display: inline-block; border: 1px solid black; padding: 2px;">T</span> <span style="display: inline-block; border: 1px solid black; padding: 2px;">L</span> <span style="display: inline-block; border: 1px solid black; padding: 2px;">X</span></p>	<p>M12-1.25x50 HHCS  <span style="display: inline-block; border: 1px solid black; padding: 2px;">D</span> <span style="display: inline-block; border: 1px solid black; padding: 2px;">T</span> <span style="display: inline-block; border: 1px solid black; padding: 2px;">L</span> <span style="display: inline-block; border: 1px solid black; padding: 2px;">X</span></p>

**Grade 5    Grade 8**  
 (No. of Marks + 2)

G = Grade (Bolt Strength)  
 D = Nominal Diameter (Inches)  
 T = Thread Count (Threads per Inch)  
 L = Length (Inches)  
 X = Description (Hex Head Cap Screw)

P = Property Class (Bolt Strength)  
 D = Nominal Diameter (Millimeters)  
 T = Thread Pitch (Thread Width, mm)  
 L = Length (Millimeters)  
 X = Description (Hex Head Cap Screw)

### Product cleaning and maintenance instructions

**Stainless Steel Finish** – Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap, window or glass cleaner may be used to clean the finish. **Dual state powder coat finish** – Mild soap, window or glass cleaner may be used to clean the finish. In order to protect the finish, you may wax your product on a regular basis with pure carnauba automotive wax. Do not use any types of soap, polish or was that contains abrasive that could damage the finish. **Textured coated finishes** should be cleaned with a mild soap on a damp sponge. Do not apply polish or was that requires to be removed by means of buffing. This type of wax is commonly used at car wash facilities. **Chrome Finish** – Mild soap, window or glass cleaner may be used to clean the finish. In order to protect the finish you should wax your product on a regular basis with pure carnauba automotive wax. Do not use any types of soap, polish or was that contains abrasive that could damage the finish.

**For Technical Support/Warranty Information please call 310-762-9944**

**Smittybilt, 400 W Artesia, Compton, CA 90220**



## Installation Instructions:

(Part # SB76896)

07-13 Jeep JK Atlas Rear Bumper w/  
Tire Gate

### Limited Warranties

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

### Duration of Limited Warranty

#### **Limited Lifetime Warranty on Stainless Steel Products -**

Smittybilt stainless steel products carry the foregoing limited repair or replacement warranty against workmanship and defects in the material so long as the original purchaser retains the original stainless steel parts.

#### **Limited Five (5) Year / 50,000 Mile Pro-Rata Warranty (whichever occurs first) on Dual-Stage Powder Coating Products -**

Smittybilt dual-stage powder coated products carry the foregoing limited repair or replacement warranty for a period of (5) years or 50,000 miles (whichever occurs first) from date of purchase against workmanship and defects in the material, provided that any claim submitted after (2.5) years from date of purchase shall, if accepted, be satisfied by Smittybilt offering customer a credit on the purchase of a replacement product equal to fifty percent (50%) of customer's initial purchase price.

#### **Limited Three (3) Year / 36,000 Mile Pro-Rata Warranty (whichever occurs first) on Chrome Products-**

Smittybilt chrome products finished carry the foregoing limited repair or replacement warranty for a period of three (3) years or 36,000 miles against workmanship and defects in the material (whichever occurs first) from the date of purchase.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

**For Technical Support/Warranty Information please call 310-762-9944**

**Smittybilt, 400 W Artesia, Compton, CA 90220**