



Installation Instructions

Contents:

1. Light Bar
2. 2 Compression Spacers
3. 2 Aluminum Mounting Brackets
4. 2 ¼" Nylock Locknuts
5. 1 Wiring Harness
6. 1 Warranty registration card


Pay special attention to polarity. Plugging light in reverse will destroy circuitry and void warranty.

Black is always negative, White or Red is positive.

Mount lightbar using supplied brackets or your choice of aftermarket mounting

options. When mounting always use the delrin compression bushings. Failure to do so will cause light to spin in mounting bracket.

- Attach red fused wire in wiring harness to battery. Mount black eyelet to suitable ground. Install switch in your choice of location.
- Plug light into switch
- Zip tie all wires out of harm's way.
- Test light to ensure proper function

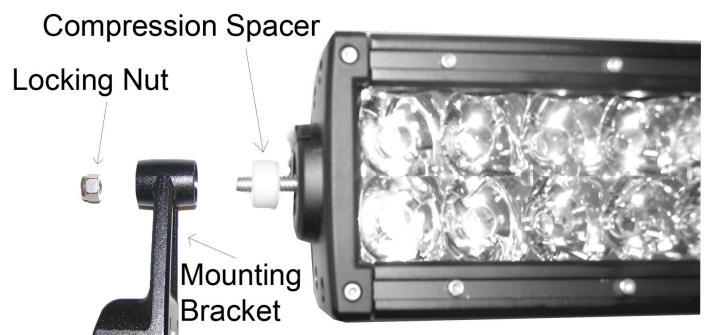

Enjoy Your New Light!!!