
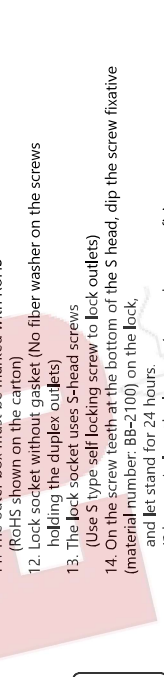


RoHS 2011/65/EU & (EU) 2015/863 COMPLIANT

REV.	DESCRIPTION	DATE
A		2022/12/21
△	Correct the polarity color of the head and increase the polarity mark of the tail	2023/01/05

CUSTOMER: P/N: MD204-15 REV. APPROVED BY:

⑤ Hosp. Grade label

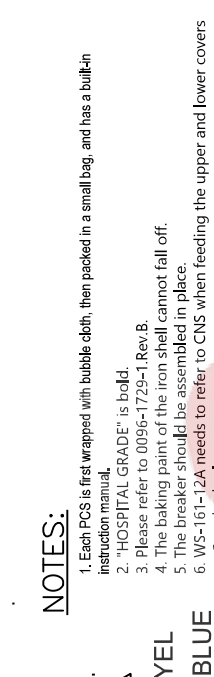

NOTES:

- Each POS is first wrapped with bubble cloth, then packed in a small bag, and has a built-in instruction manual.
- "HOSPITAL GRADE" is bold.
- Please refer to 0096-1729-1, Rev.B.
- The baking paint of the iron shell cannot fall off.
- The breaker should be assembled in place.
- WS-161-12A needs to refer to CNS when feeding the upper and lower covers Standard salt spray test.
- Medical-grade sockets use anti-foreign object sockets (socket apply tamper resistance)
- LABEL 4 is attached to the edge of WS-161-11A. LABEL 2 and 3 are attached to the bottom of the box.
- Please note that this product does not have LED lights.
- Changhua production began to issue "Version I"
- ZH(Zhang Hwa) factory begin from revision I
- The outer box must be marked with RoHS (RoHS shown on the carton)
- Lock socket without gasket (No fiber washer on the screws holding the duplex outlets)
- The lock socket uses S-head screws (Use S type self locking screw to lock outlets)
- On the screw teeth at the bottom of the S head, dip the screw fixative (material number: BB-2100) on the lock, and let stand for 24 hours.
- S base spiral tooth place, moistens the screw fixing agent (the material number: BB-2100) is locking, and settles for 24 hours.
- For the content and specifications of LABEL 2 and 3, please refer to: 0096-1729-2, Rev.A

ITEM	DESCRIPTION	QTY	COLOR
⑩	Cable ties	1	WHITE
⑨	LABEL 4	1	---
⑧	LABEL 3	1	---
⑦	LABEL 2	1	---
⑥	LABEL 1	1	---
⑤	Hosp. Grade label	1	---
④	Plastic cap	1	WHITE
③	SJTW 14AWG 3C 105°C	1	RAL 9016 (WE-2985)
②	WS-161-11A(5-15R) 15(A) 125(V)	1	APPROVAL: UL,CUL
①	WS-001H(5-15P) 15(A) 125(V)	1	APPROVAL: UL,CUL

頭	尾	線種	線規	芯線數	溫度	顏色	總長度
WS-001H-1	WS-161-11A	SJTW	14AWG	3C	105°C	WE-2985	4573mm

SIGNATURE

SAFETY ENGINEER: _____

MANAGER BY: _____

CHECKED BY: _____

DRAWN BY: _____

CORDTEC
POWER CORPORATION

AC Connectors of Cordtec Power Corp
Main: 1-414-434-2220 Fax: 1-414-323-8886 Text: 1-414-323-3240
Email: Info@CordtecPower.com
Website: CordtecPower.com/ ACWORKS.com

CORDTEC POWER CORPORATION

CONFIRMED

2023.03.20

Chen Tony

The first four digits indicate the year (such as 2009)

The last two digits represent the month (For example, September is expressed as 09)

ITEM	DESCRIPTION	QTY	COLOR
⑩	Cable ties	1	WHITE
⑨	LABEL 4	1	---
⑧	LABEL 3	1	---
⑦	LABEL 2	1	---
⑥	LABEL 1	1	---
⑤	Hosp. Grade label	1	---
④	Plastic cap	1	WHITE
③	SJTW 14AWG 3C 105°C	1	RAL 9016 (WE-2985)
②	WS-161-11A(5-15R) 15(A) 125(V)	1	APPROVAL: UL,CUL
①	WS-001H(5-15P) 15(A) 125(V)	1	APPROVAL: UL,CUL