


50FT±3.0"

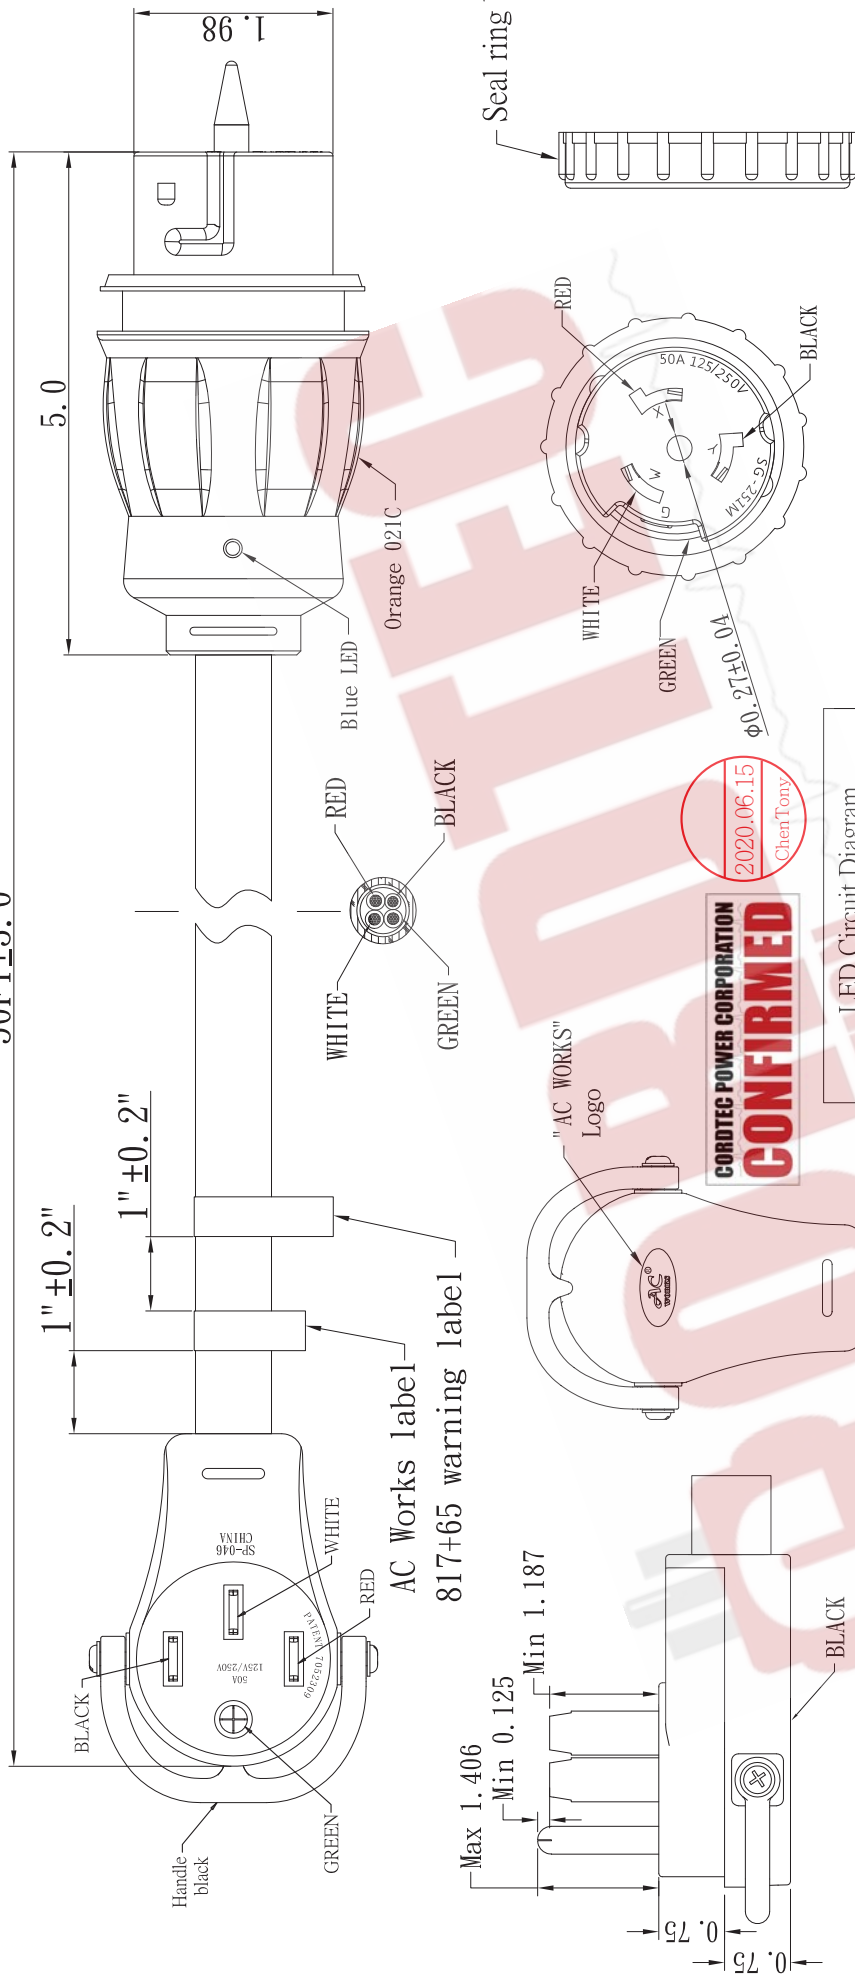

Seal ring 置於袋中即可,不用裝上母插端。

Note :

1. Male and female terminals are nickel plated.
2. 1PC/bag(each pouch contains a wiring).
3. Put it in 25*20 inch bag.
Bag thickness 0.3mm above. Hot sealing.

| No. | Name | Specification |
|-----|------------------|---|
| 4 | Blades of Socket | Marine SM-251 X/W/Y/G Terminal |
| 3 | Blades of Plug | GEM:97650ABL-1;97651ABL-1*3PCS |
| 2 | PVC of Plug | 45P BLACK |
| 1 | Spec. of Cord | STW 6/3C+8/1C 105C 75P BLACK 49.89FT±2.0" |

UNIT: Inch.
 DWG NO.: 1 of 1
 TOLERANCE:
 DATE: 2020.06.15
 REV: 1.0
 SCALE: A1ex
 DRAWN: APPROVED
 CHECKED: APPROVED
 CUSTOMER: Cordtec Power
 ITEM: TE1450-050

CORDTEC
 POWER CORPORATION

AC Connectors of Cordtec Power Corp
 Main: 1-414-434-2220 Fax: 1-414-323-8386
 Text: 1-414-323-3240
 Email: Info@CordtecPower.com
 Website: CordtecPower.com/ ACWORKS.com