

Ring Top Post

The new proven standard
in portable posts

NEW

Available in
two heights



Wear Proof



Tangle Proof



Stomp Proof



“Once I used the new Ring Top Post I didn’t want to go back to the old style”

From carrying an armful of posts, to eliminating the risk of shorting the new Ring Top Post has been designed to make portable fencing easier.

The Ring Top Post combines more strength with less frustration:

- a head that will not wear through
- a super strong foot plate that will not bend under pressure
- a sleek design that significantly reduces tangling




Ring Top Post

(Patent Pending,
Registered Design.)

G72313 - Tall version (850mm)

G72303 - Standard height version (728mm)

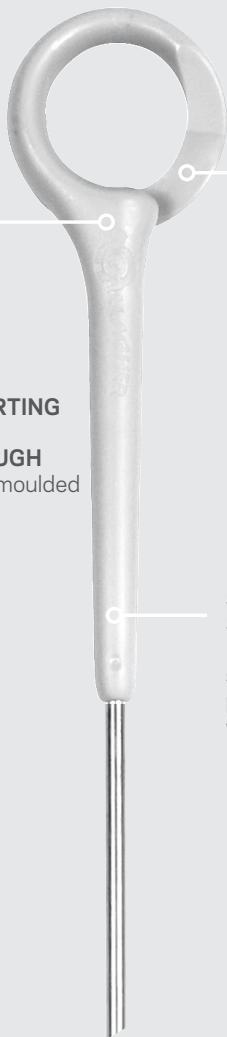

ELIMINATE SHORTING AND PREVENT WEARING THROUGH

Super tough over-moulded
GF nylon head

SIGNIFICANTLY REDUCED TANGLING

Unique head centred
over shaft with no
protrusions or
trapping points

STRONG SHAFT AND SHOCK PREVENTION

Long insulation sections
strengthen shaft and
provide insulation
when handling



TOUGH, UNBENDABLE FOOT PLATE

Over-moulded GF nylon foot design will not bend or deform. Can withstand 200 kg of pressure

EASY TO USE

Blade design prevents rotation and eases install in hard ground as well as minimising tangling points. Flat section holds wire/tape down when crossing fence.

850mm



728mm*



NEW MODEL



EASY TO DISTINGUISH BETWEEN MODELS

Different foot colour enables quick identification between versions.

- Black - Tall 850mm
- Orange - Standard 728mm

* White version for 728mm length coming soon.

Proven in testing and

35% faster to
separate from
a bundle

Test results after dropping
a weight onto foot
multiple times

Comparative wear test results after
200m of braid wound
through heads

and on farm





GALLAGHER

181 Kahikatea Drive, Hamilton 3206, New Zealand.
Private Bag 3026, Hamilton 3240, New Zealand.

TEL 0800 731 500
FAX +64 7 838 9801

EMAIL cs@am.gallagher.co
www.gallagher.co



“When asked to put up
a fence my staff argued
over who got the new
Ring Top Posts”