




**Dimensions: 1909\*1134\*35mm**  
**Mono Power: 450W**

### Characteristics


- High efficiency solar cell to keep the modules efficiency reach to 20.79%.
- Positive tolerance to ensure higher output.
- Excellent performance under weak light conditions.
- Modules withstand extremely (temperature, load and impact) TUV certification.
- All modules combination and packing through stepping current to keep effectively reduce mismatch loss.
- 100% EL test to keep higher quality.



Anodized aluminum frame withstand corrosion and damage, Special osculum can reduce destruction by water freeze.

### Warranty

- 25 years Linear Product Workmanship Warranty.
- 10 years workmanship warranty.

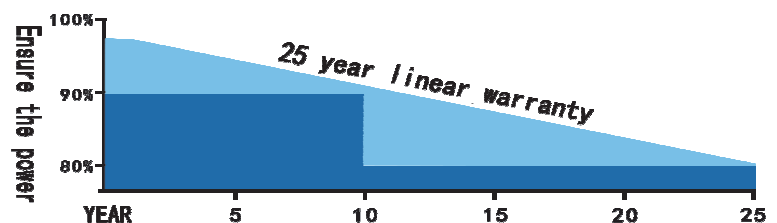

### Quality and safety

- ISO9001:2015 certified supplier, we provide world first class solar products for clients.
- TUV,IEC,CEC,CE,CB approved.



IP68 junction box  
 long-term weather  
 endurance.

ISO 9001 ISO 14001

SGS TÜV S A A R IEC 61215 EC 61739 Ethical Inspection

IEC

CB

Green Energy Council

CE

## Electrical Characteristics

Model No.	SW450M-60
Maximum Power (Pmax)	450W
Max-power Voltage (Vmp)	34.2V
Max-power Current (Imp)	13.16A
Open-circuit Voltage (Voc)	41.72V
Short-circuit Current (Isc)	13.82A
Module Efficiency	20.79%
Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500Vdc
Maximum Series Fuse Rating	20A
Power Tolerance	±3%

\*STC condition: 1000 W/m<sup>2</sup>,1.5AM and 25°C cell temperature.

## Temperature Characteristics

NMOT	46°C±2°C
Temperature Co-efficient of Pmax	-0.39%/°C
Temperature Co-efficient of Voc	-0.34%/°C
Temperature Co-efficient of Isc	0.06%/°C


## Mechanical Characteristics

Mono Power	450W
Cell Type	Mono 182*91mm
Cell Arrangement	120(6*20)
Dimensions	1909*1134*35mm
Weight	24.5kg
Front Cover	3.2mm tempered glass
Frame Material	Anodized aluminium alloy
Junction Box	IP68 rated
Output Cables	4mm <sup>2</sup> ,Length: (+) 300mm/ (-) 300mm

## Packing

Packing	40'HC
Pieces/Pallet	30
Pieces/container	720

## I-V Curve

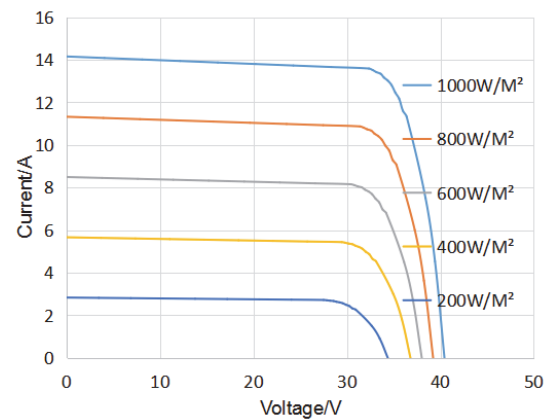

## Dimensions

