

# ArcFlash™

## Product Overview



*ArcFlash Window Flashing is a 70 mil, self-adhering, self-sealing, waterproofing rubberized asphalt tape, laminated to a crimped and stretchable, high-strength polyethylene film backing designed specifically for arched window flashing applications. Can also be used to create a sill pan for a window rough opening.*



ArcFlash is used to flash round-top or custom shaped designs.



Flexible material can stretch to conform to curved, round or fan-shaped areas



Easy peel and stick tape supplied in rolls with an easy to remove release liner for mess free application



Self-adhering, self-sealing, ArcFlash™ tape seals around nails, staples and fasteners ensuring years of trouble-free and maintenance-free performance



Superior elasticity resists cracking or tearing over time when structural movement occurs



Available in 6", 9", and 12" widths




Rolls are 75 linear feet



Our rubberized-asphalt allows you to create a custom waterproof flashing design on virtually any fenestration design

Property	ArcFlash
Thickness (mils) (+-.05)	70
Water Vapor Transmission ASTM E 96 (Method B)	Permeance (US Perms) < 0.02
Peel Adhesion ASTM D 1000 (To Primed Steel)	> 10.0 lbs./ in.width
Elongation-Ultimate Failure or Rubberized Asphalt ASTM D 412 (Modified Die C)	> 500%
Softening Point ASTM D 36	200 - 230°F
Low Temperature Pliability ASTM D 146 (Modified)	No cracking at -25°F

## Companion Products

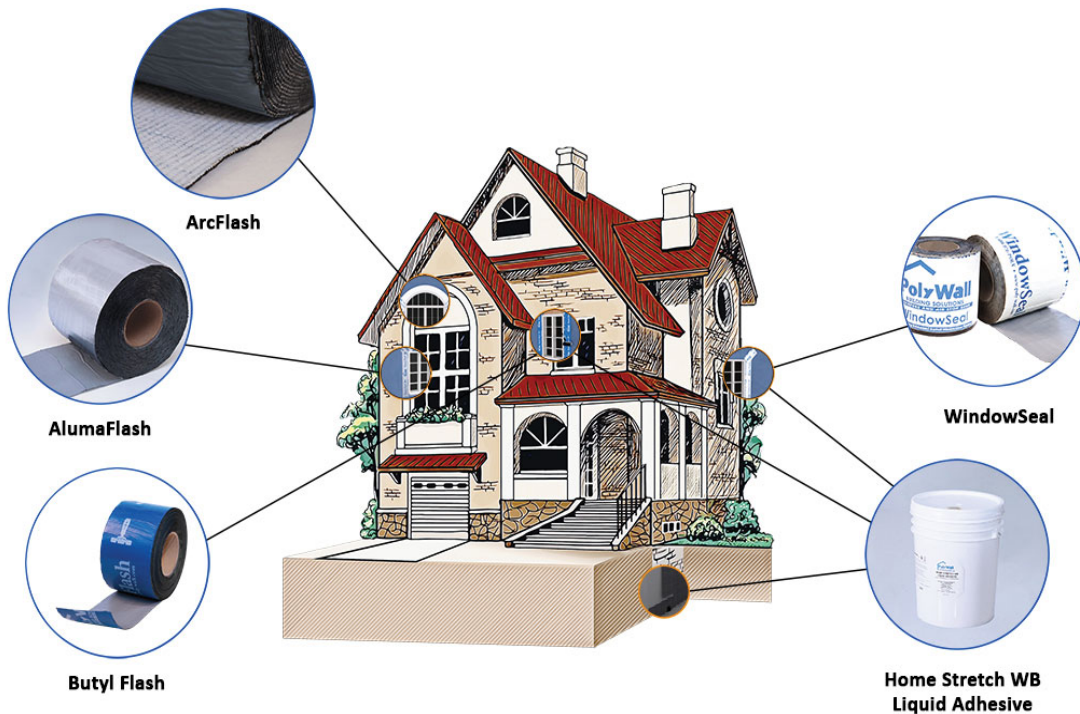

## contact us



3801 S. IH-45  
Ennis, TX 75119

Phone : 214-515-5000  
Web : [www.polyguard.com](http://www.polyguard.com)  
Social : @polyguardproducts

