

## MODEL S50

### Description:

- Ventilating fan should be ceiling or wall mounted and capable of exhausting air quietly and efficiently.
- The S50 fan is HVI certified.
- Torsion mounting-no tools required

### Housing

- Built-in mounting ears
- Made of rugged 26 GA galvanized steel
- Ceiling or wall installation
- Detachable 3 inch or 4 inch polymetic collar
- Housing size: 7 1/4"x7 1/2"x3 5/8"

### Motor/Blower

- Plug-in permanently lubricated motor for continuous operation
- Power rating should be 120 volts and 60 Hz
- Fan should be ETL and cETL listed for tub/shower when used with a GFCI branch circuit.
- Low RPM for quiet performance
- Motor comes with a built in overload disconnect for safety and longer motor life

### Grille

- The grille is low profile that has elegance and still able to maintain its simplicity.
- Made of a rugged polymeric resin that's known for its long life durability

### Typical specification

- Ceiling ventilator shall have corrosion resistance galvanized steel.
- It shall be ducted to a roof vent or wall cap using 3 inch or 4 inch round pipe.
- Blower assembly shall be removable, have a centrifugal type blower wheel and permanently
- lubricated motor designed for continuous operation
- Air and sound delivery shall meet the HVI certified rating as per the fan curves attached.



**Optional**  
Fluorescent Light




Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

### CERTIFICATIONS



## MODEL S50

Model Number	S50
Static Pressure in inches w.g.	0.1
Air Volume (CFM)	50
Noise (sones)	3.4
Fan Watts	38W
Duct Diameter	3 "
Power Rating (V/Hz)	120/60

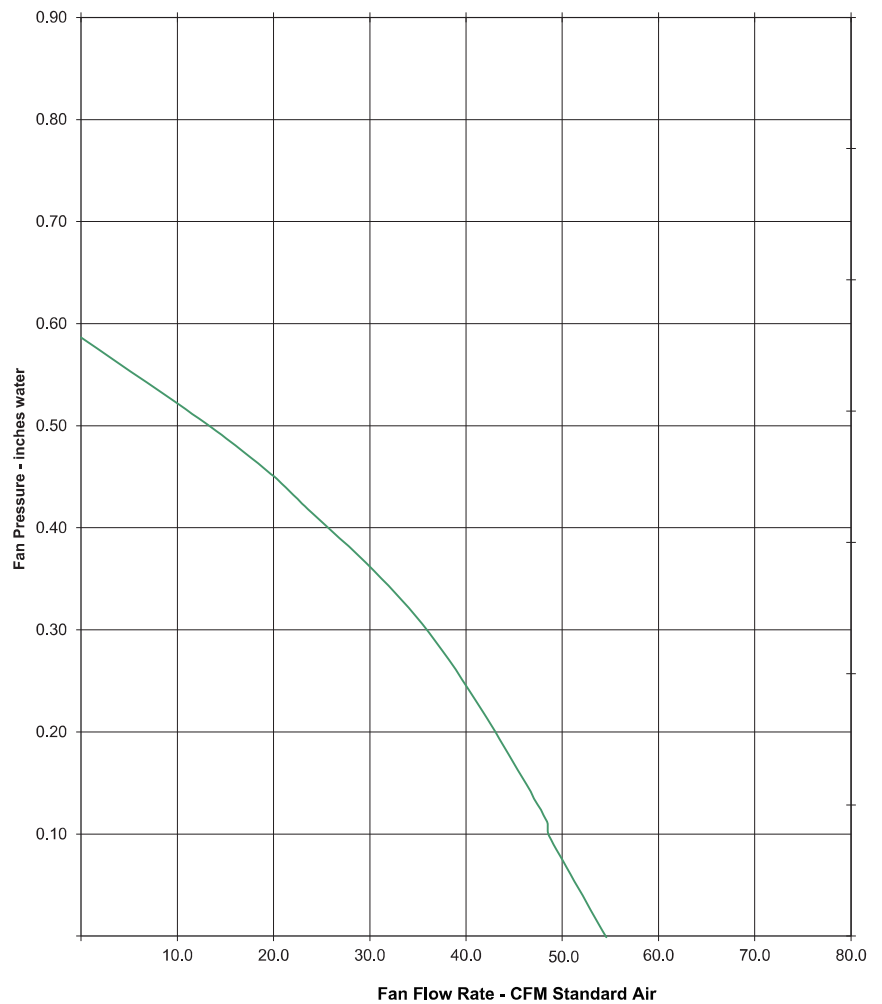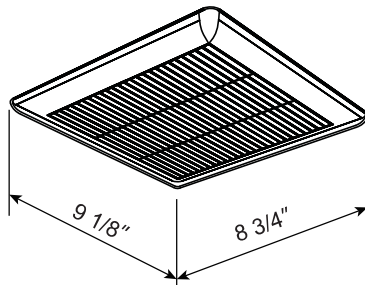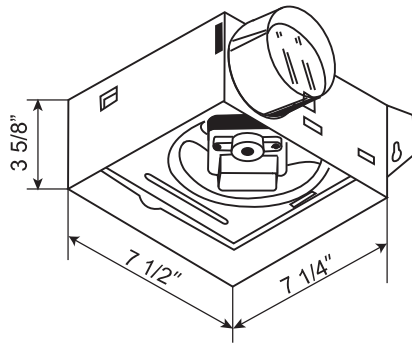

### CERTIFICATIONS

