

Model SE 80

Ultra Silent, High Performance, Attractive Design Grille

SE80 ventilation fan is a ceiling mount exhaust fan capable of moving air quietly and efficiently. STERLING SE series exhaust fans are HVI and ENERGY STAR certified. The fan features a capacitor start motor, which is known for its high efficiency and long lasting reliability. This fan has a unique plug and play concept that allows you to add accessories such as motion sensor, humidistat, light, or even speed/controller without changing the fan.





Optional
Humidistat
Motion Sensor
Speed controller
Light Grille



- L LIGHT
- H HUMIDITY SENSOR
- SC SPEED CONTROLLER
- LSC LIGHT & SPEED CONTROLLER
- LH LIGHT & HUMIDITY SENSOR
- M MOTION SENSOR
- MH MOTION & HUMIDITY SENSOR

SE 80 is ETL listed and meets to UL and cUL safety standards. This fan has a unique plug and play concept that allows you to add a humidity sensor, speed controller, motion sensor, Light as an accessory without dismantling the fan.

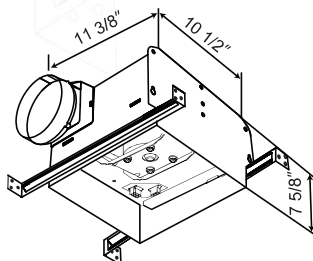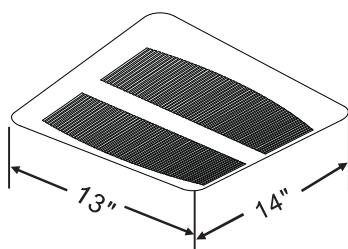



Motor/Blower

- Plug in permanently lubricated motor- Engineered for continuous operation.
- Power rating 120 volts and 60 Hz.

Features

- PLUG n PLAY Humidistat, Motion Sensor, Light/Nightlight, Speed/Controller
- Two speed operation. When connected to our speed/controller
- Capacitor start motor provides high efficiency and reliability.
- Low sones rating for super quiet operation.
- Advanced polypropylene slim designer grille.
- Heavy gauge galvanized housing with reinforced face flange for added strength.
- Discharge collar with integrated backdraft damper to stop cold air entering the building.
- All fans are ETL listed for use in tub and shower with GFI branch circuit wiring.
- All models can incorporate light grille with either fluorescent or LED lighting.
- Mounting brackets are included with up to 24 inch joist centres.
- Standard three year warranty.

Fan pressures - Cfm chart

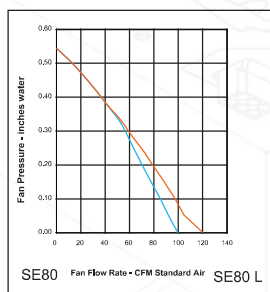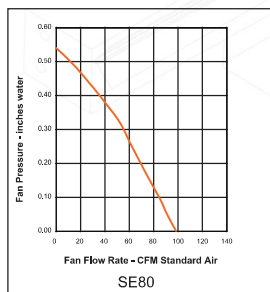

Typical specification

Air and sound delivery meet the HVI certified ratings as per the fan curves attached. STERLING ventilators come with a permanent split capacitor motor which improves efficiency.

Housing

- Made of rugged 26 GA galvanized steel with 4 point mounting capability.
- Detachable 4 inch and 6 inch polymeric resin collar, which includes a light weight built-in back draft damper.
- Double hanger bar mounting brackets that are adjustable up to 24 inch span allows for ideal positioning.

Light Grille

- The Premium grille is low profile elegant and simple to install and use.
- Made of a rugged polymeric resin known for its long life durability.
- Comes with torsion spring clips that helps mount the grille evenly.
- Light Kit includes GU 24 socket and E12 4Watt Night Light.
- Bulbs are not Included

Model Number	SE80T	
Static Pressure in inches w.g.	0.1	0.25
Air Volume (CFM)	80	58
Noise (sones)	0.4	N/A
Fan Watts	25W	
Duct Diameter	4"	
Power Rating(V/Hz)	120/60	

Product Range

B BASE MODEL SE 80

H SE 80 H

LSC SE 80 LSC

M SE 80 M

L SE 80 L

SC SE 80 SC

LH SE 80 LH

MH SE 80 MH

Model SE 110

Ultra Silent, High Performance, Attractive Design Grille

Ventilating fan is ceiling or wall mounted and capable of moving air quietly and efficiently. The SE series is HVI and ENERGY STAR certified. It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It is ETL listed and meets to UL and cUL safety standards. This fan has a unique plug and play concept that allows you to add accessories such as motion sensor, humidistat, light, or even speed/controller without changing the fan.





Optional
Humidistat
Motion Sensor
Speed controller
Light Grille



- L LIGHT
- H HUMIDITY SENSOR
- SC SPEED CONTROLLER
- LSC LIGHT & SPEED CONTROLLER
- LH LIGHT & HUMIDITY SENSOR
- M MOTION SENSOR
- MH MOTION & HUMIDITY SENSOR

STERLING ventilators come with permanent split capacitor motor, which improves efficiency and enables the STERLING line to carry the ENERGY STAR label.

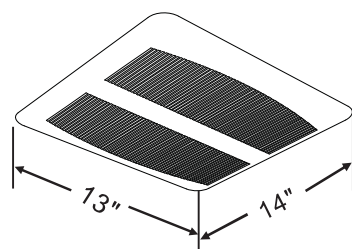

Motor/Blower

- Plug in permanently lubricated motor- Engineered for continuous operation.
- The motor is energy efficient and exceeds the ENERGY STAR qualifications for continuous duty operation.
- Power rating 120 volts and 60 Hz
- Fan is ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit.
- Motor comes with a built in overload disconnect for safety and longer motor life.
- Our Premium series operates at lower RPM's to give you quieter operation.

Features

- PLUG n PLAY
 - Humidistat, Motion Sensor, Light/Nightlight, Speed/Controller
- Two speed operation. When connected to our speed/controller
- Capacitor start motor provides high efficiency and reliability.
- Low sones rating for super quiet operation. (<1.0)
- Advanced polypropylene slim designer grille.
- Heavy gauge galvanized housing with reinforced face flange for added strength.
- Discharge collar with integrated backdraft damper to stop cold air entering the building.
- All fans are ETL listed for use in tub and shower with GFI branch circuit wiring.
- All models can incorporate light grille either fluorescent or LED lighting.
- Mounting brackets are included with up to 24 inch joist centres.
- Standard three year warranty.

Model Number	SE110	
Static Pressure in inches w.g.	0.1	0.25
Air Volume (CFM)	110	100
Noise (sones)	0.6	0.8
Fan Watts	33W	
Duct Diameter	6"	
Power Rating(V/Hz)	120/60	

Typical specification

- Ceiling ventilator comes with corrosion resistance galvanized steel housing with 4 point mounting capability.
- It is ducted to a roof vent or wall cap using 4 inch & 6 inch round pipe.
- Blower assembly is removable, has a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.
- Air and sound delivery meet the HVI certified ratings as per the fan curves .


Housing

- Made of rugged 26 GA galvanized steel
- Detachable 4 inch or 6 inch polymeric resin collar which includes a light weight built in back draft damper.
- Double hanger bar mounting brackets that are adjustable up to 24 inch span allows for ideal positioning.

Light Grille

- The Premium grille is low profile elegant and simple to install and use.
- Made of a rugged polymeric resin known for its long life durability.
- Comes with torsion spring clips that helps mount the grille evenly.
- Light Kit includes GU 24 socket and E12 4Watt Night Light.
- Bulbs are not Included

Fan pressures - Cfm chart

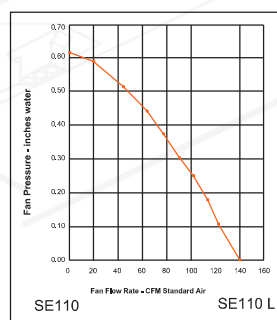

Product Range



BASE MODEL SE 110



SE 110 H



SE 110 LSC



SE 110 M



SE 110 L



SE 110 SC



SE 110 LH



SE 110 MH

Model SE 120

Ultra Silent, High Performance, Attractive Design Grille





- L LIGHT
- H HUMIDITY SENSOR
- SC SPEED CONTROLLER
- LSC LIGHT & SPEED CONTROLLER
- LH LIGHT & HUMIDITY SENSOR
- M MOTION SENSOR
- MH MOTION & HUMIDITY SENSOR



Optional
Humidistat
Motion Sensor
Speed controller
Light Grille

Ventilating fan is ceiling or wall mounted and capable of moving air quietly and efficiently. The SE series is HVI and ENERGY STAR certified. It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It is ETL listed and meets to UL and cUL safety standards. This fan has a unique plug and play concept that allows you to add accessories such as motion sensor, humidistat, light, or even speed/controller without changing the fan.

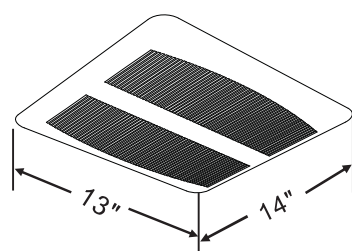

STERLING ventilators come with permanent split capacitor motor, which improves efficiency and enables the STERLING line to carry the ENERGY STAR label.

Motor/Blower

- Plug in permanently lubricated motor- Engineered for continuous operation.
- The motor is energy efficient and exceed the ENERGY STAR requirements for continuous duty operation.
- Power rating should be 120 volts and 60 Hz
- Fan is ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit.
- Motor comes with a built in overload disconnect for safety and longer motor life.
- Our Premium series operates at lower RPM's to give you quieter operation.

Features

- PLUG n PLAY
 - Humidistat, Motion Sensor, Light/Nightlight, Speed/Controller
 - Two speed operation. When connected to our speed/controller
 - Capacitor start motor provides high efficiency and reliability.
 - Low sones rating for super quiet operation.
 - Advanced polypropylene slim designer grille.
 - Heavy gauge galvanized housing with reinforced face flange for added strength.
 - Discharge collar with integrated backdraft damper to stop cold air entering the building.
 - All fans are ETL listed for use in tub and shower with GFI branch circuit wiring. -
- All models can incorporate light grille with either fluorescent or LED lighting.
- Mounting brackets are included with up to 24 inch joist centres.
 - Standard three year warranty.

Model Number	SE120	
Static Pressure in inches w.g.	0.1	0.25
Air Volume (CFM)	120	100
Noise (sones)	0.9	1.0
Fan Watts	33W	
Duct Diameter	6"	
Power Rating(V/Hz)	120/60	

Typical specification

- Ceiling ventilator comes with corrosion resistance galvanized steel housing with 4 point mounting capability.
- It is ducted to a roof vent or wall cap using 4 inch & 6 inch round pipe.
- Blower assembly is removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.
- Air and sound delivery meet the HVI certified ratings as per the fan curves attached.


Housing

- Made of rugged 26 GA galvanized steel
- Detachable 4 inch or 6 inch polymeric resin collar which includes a light weight built in back draft damper.
- Double hanger bar mounting brackets that are adjustable up to 24 inch span allows for ideal positioning.

Light Grille

- The Premium grille is low profile that has elegance and still able to maintain its simplicity.
- Made of a rugged polymeric resin known for its long life durability.
- Comes with torsion spring clips that helps mount grille evenly.

Fan pressures - Cfm chart

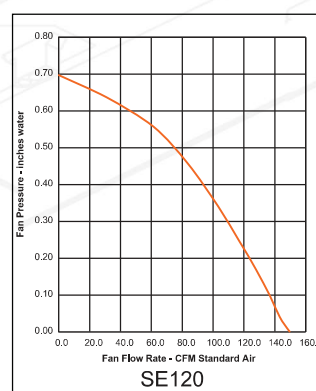

Product Range

B BASE MODEL SE 120

H SE 120 H

LSC SE 120 LSC

M SE 120 M

L SE 120 L

SC SE 120 SC

LH SE 120 LH

MH SE 120 MH

Model SE 150

Ultra Silent, High Performance, Attractive Design Grille





- L LIGHT
- H HUMIDITY SENSOR
- SC SPEED CONTROLLER
- LSC LIGHT & SPEED CONTROLLER
- LH LIGHT & HUMIDITY SENSOR
- M MOTION SENSOR
- MH MOTION & HUMIDITY SENSOR



Optional
Humidistat
Motion Sensor
Speed controller
Light Grille

Ventilating fan is ceiling or wall mounted and capable of moving air quietly and efficiently. The SE series is HVI and ENERGY STAR certified. It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It is ETL listed and meets to UL and cUL safety standards. This fan has a unique plug and play concept that allows you to add accessories such as motion sensor, humidistat, light, or even speed/controller without changing the fan.

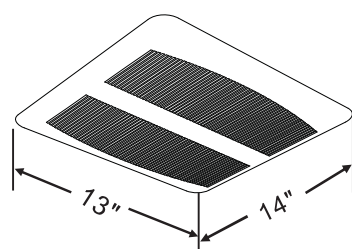

STERLING ventilators come with permanent split capacitor motor, which improves efficiency and enables the STERLING line to carry the ENERGY STAR label.

Motor/Blower

- Plug in permanently lubricated motor- Engineered for continuous operation.
- The motor is energy efficient and exceed the ENERGY STAR qualification for continuous duty operation.
- Power rating is 120 volts and 60 Hz
- Fan is ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit.
- Motor comes with a built in overload disconnect for safety and longer motor life.
- Our Premium series operates at lower RPM's to give you quieter operation.

Features

- PLUG n PLAY
 - Humidistat, Motion Sensor, Light/Nightlight, Speed/Controller
- Two speed operation. When connected to our speed/controller
- Capacitor start motor provides high efficiency and reliability.
- Low sones rating for super quiet operation. (<1.0)
- Advanced polypropylene slim designer grille.
- Heavy gauge galvanized housing with reinforced face flange for added strength.
- Discharge collar with integrated backdraft damper to stop air entering the building.
- All fans are ETL listed for use in tub and shower with GFI branch circuit.
- All models can incorporate light grille with either fluorescent or LED lighting.
- Mounting brackets are included with up to 24 inch joist centres.
- Standard three year warranty.

Model Number	SE150	
Static Pressure in inches w.g.	0.1	0.25
Air Volume (CFM)	150	136
Noise (sones)	1.1	1.4
Fan Watts	45W	
Duct Diameter	6"	
Power Rating (V/Hz)	120/60	

Typical specification

- Ceiling ventilator comes with corrosion resistance galvanized steel housing with 4 point mounting capability.
- It is ducted to a roof vent or wall cap using 4 inch & 6 inch round pipe.
- Blower assembly is removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.
- Air and sound delivery meet the HVI certified ratings as per the fan curves attached.


Housing

- Made of rugged 26 GA galvanized steel
- Detachable 4 inch or 6 inch polymeric resin collar which includes a light weight built in back draft damper.
- Double hanger bar mounting brackets that are adjustable up to 24 inch span allows for ideal positioning.

Light Grille

- The Premium grille is low profile elegance and simply to use.
- Made of a rugged polymeric resin that's known for its long life durability.
- Comes with torsion spring clips that helps mount grille evenly.

Fan pressures - Cfm chart

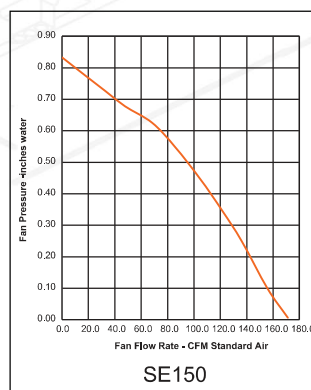

Product Range

B BASE MODEL SE 150

H SE 150 H

LSC SE 150 LSC

M SE 150 M

L SE 150 L

SC SE 150 SC

LH SE 150 LH

MH SE 150 MH