

**PRODUCT FEATURES:**

Single function shower head.
Brass ball joint to define the best position.
Easy to install.
Prevents hard water deposits, easy to clean in seconds, with the touch of a finger.
This product can be used to help achieve water efficiency goals as well as gaining USGBC LEED points.

MATERIALS:

Solid brass, for durability and reliability.
Finishes with ultra high resistance to corrosion and tarnishing.

ACCESORIES:

Includes shower arm and flange.

INSTALLATION:

Wall mount.
½" - 14 NPT connection.




CODES AND STANDARDS:

ASME A112.18.1 / CSA B125.1-2018,
Plumbing Supply Fittings
NSF/ANSI 61/ANSI-2020, Drinking Water
System Components - Health Effects
NSF/ANSI 372-2016, Drinking Water Systems
Components - Lead Content
EPA WaterSense Specifications for Showerheads

FINISHINGS:

BB	PVD Brushed Brass
BW	Bright White
MB	Matte Black
PC	Polished Chrome
PCO	PVD Polished Copper
PG	PVD Polished Gold
PGH	PVD Polished Graphite
PN	PVD Polished Nickel
RG	PVD Rose Gold
SC	PVD Satin Copper
SGH	PVD Satin Graphite
SN	PVD Satin Nickel
SRG	PVD Satin Rose Gold

Estimated Dimensions Dim. inch. [mm]

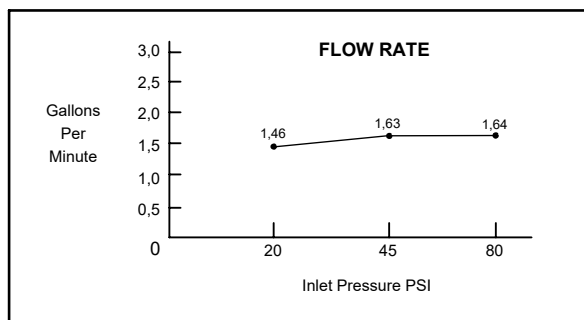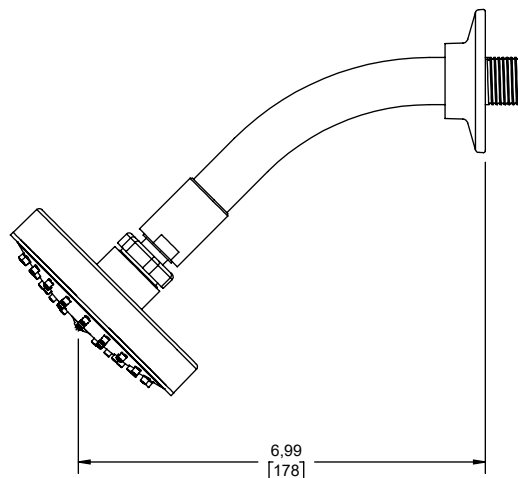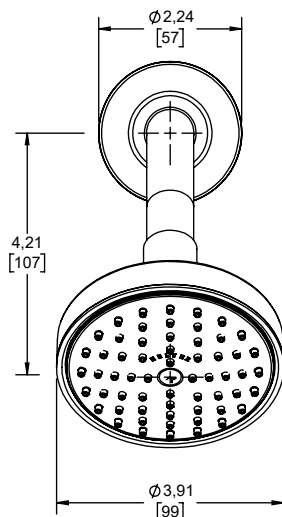

WORKING PRESSURE:

Pmin.= 20 PSI

Pmax.= 80 PSI

MAXIMUM FLOW RATE:

1,64 GPM

NOTES:

Install the product according to the Installation Guide.