



## DIY® Series Multi-Zone

Patented Ductless Mini-Split Heat Pump A/C

ZONE 5

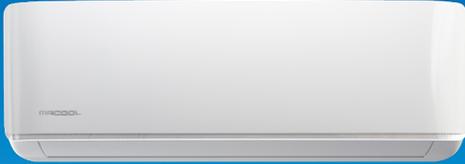


ZONE 4

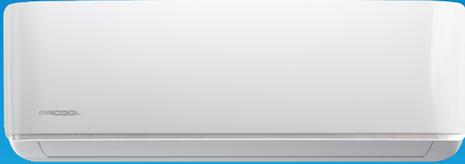

ZONE 3



ZONE 2

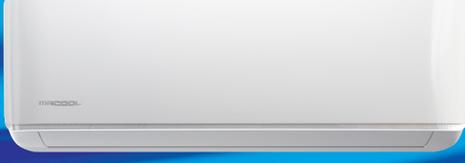

ZONE 1



### Simple, easy air comfort in up to 5 zones.

The MRCOOL® DIY® Multi-Zone Series ductless mini-split is the only whole-home mini-split solution you can install yourself.



JUST ASK amazon alexa

works with the Google Assistant

**SMART HVAC CONTROLLER®**



- ✓ Easy DIY® Installation
- ✓ Pre-Charged DIY® Quick Connect Line Set
- ✓ Energy Efficient
- ✓ Multi-Room Comfort
- ✓ Gold Fin® Condenser
- ✓ DIY Pro® Cable
- ✓ Eco Safe R-410A Refrigerant
- ✓ Lifetime Technical Support
- ✓ Follow Me® Feature
- ✓ Low Ambient Cooling



# DIY<sup>®</sup> Quick Connect<sup>®</sup> FACTORY CHARGED LINE SET\*

The patented MRCOOL<sup>®</sup> DIY<sup>®</sup> Quick Connect<sup>®</sup> Line Set\* is 100% accurately pre-charged with R-410A refrigerant. This makes installation quick and easy with no vacuum required.

- ✓ Kink Resistant
- ✓ Simple to Use Screw On Quick Connect<sup>®</sup> Valves
- ✓ Available in 16', 25', 35' & 50' lengths
- ✓ Line sizes 1/4", 1/2" & 3/8", 5/8"
- ✓ Multi-Zone Condenser includes adapter for the 24K Air Handler (3/8", 5/8" Line Size)
- ✓ Leak Proof
- ✓ No Vacuum Needed
- ✓ 100% Accurately Pre-Charged R-410A Refrigerant
- ✓ Create Longer Line Sets With the MRCOOL<sup>®</sup> DIY<sup>®</sup> Coupler

The MRCOOL<sup>®</sup> DIY<sup>®</sup> Quick Connect<sup>®</sup> Line Set\* is intended for use with the MRCOOL<sup>®</sup> DIY<sup>®</sup> Single or Multi-Zone Units.



Easy DIY® installation



Smartphone App



Easy Quick Connect®



Leakage Detection  
(Some units)



DIY Pro™ Cable



Low Ambient Cooling\*



DC Inverter



Gold Fin® Condenser



Follow Me® Function

# SPECIFICATIONS

HEAT PUMP CONDENSER-Outdoor Model		DIY-MULTI2-18HP230C	DIY-MULTI3-27HP230C	DIY-MULTI4-36HP230C	DIY-MULTI5-48HP230C
<b>Maximum Number of Zones</b>	<b>UNIT</b>	2	3	4	5
EER2	Btu/W	12.5	12.0	10.5	11.0
SEER2	Btu/W	21.2	22.0	21.5	20.5
HSPF2-4	Btu/W	9.6	9.5	8.8	9.2
HSPF2-5	Btu/W	7.5	7.3	6.8	7
Power Supply	V~Hz, ph	208-230~60, 1	208-230~60, 1	208-230~60, 1	208-230~60, 1
Minimum Circuit Ampacity (Outdoor)	A	18.0	26.0	27.0	40.0
Maximum Fuse (Breaker)	A	25.0	40.0	45.0	60.0

## DIMENSIONS & WEIGHT

Net Dimension (WxDxH)	inch	35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89	37.24 x 16.14 x 31.89	37.48 x 16.34 x 52.48
Packing Dimension (WxDxH)	inch	40.94 x 17.64 x 29.33	42.91 x 19.69 x 34.84	42.91 x 19.88 x 37.01	43.11 x 19.49 x 58.27
Net Weight	lbs	100.53	139.99	170.42	222.89
Gross Weight	lbs	111.11	157.19	187.83	254.41
Noise Level (Lo/Mi/Hi)	dB(A)	59	61	65	61.5

## REFRIGERANT & PIPING

Refrigerant R-410A	oz	65.00	91.71	134.04	162.00
Piping Size Liquid Side/Gas Side	inch	1/4"-3/8"	1/4"-3/8"	*1/4"-3/8"	*1/4"-3/8"

\* If you are using a 24K or greater capacity Air Handler with a 4-zone or 5-zone condenser, you will need to install the included 1/2" line set adapter kit to the outside unit, before the line set can be connected. This requires you to replace both of the connected couplings that are on port A of the outside unit, so the air handler can be connected.

WALL MOUNTED-Indoor Model	Indoor Unit	DIY-09-HP-WMAH-230C25	DIY-12-HP-WMAH-230C25	DIY-18-HP-WMAH-230C25	DIY-24-HP-WMAH-230C25	DIY-36-HP-WMAH-230C25
---------------------------	-------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

## ELECTRICAL PARTS

Power Supply	V~Hz,ph	208-230~60,1	208-230~,60,1	208-230~,60,1	208-230~,60,1	208-230~,60,1
Minimum Circuit (Disconnect)	A	3.0	3.0	3.0	3.0	3.0
Maximum Fuse (Breaker)	A	15.0	15.0	15.0	15.0	15.0
Noise Level (Hi/Mi/Lo)	dB(A)	43.5/40/35/25	43.5/40/35/25	44.5/37/31	48.5/43.5/33	52/45/34

## DIMENSIONS & WEIGHT

Net Dimension (WxDxH)	inch	31.57 x 7.44 x 11.69	31.57 x 7.44 x 11.69	42.52 x 8.90 x 13.19	42.52 x 8.90 x 13.19	49.57 x 11.10 x 14.25
Packing Dimension (WxDxH)	inch	36.02 x 16.34 x 13.98	36.02 x 16.34 x 13.98	49.09 x 19.57 x 17.32	49.09 x 19.57 x 17.32	56.69 x 21.26 x 19.69
Net Weight	lbs	23.8	23.6	34.61	35.27	47.84
Gross Weight	lbs	34.4	34.17	56.00	60.19	78.26



\*If the original owner does not register the unit, the warranty defaults to the standard 5 year parts, 7 year compressor warranty.

\*\*The original, registered owner must be enrolled in the MrCool Care Program every year in order to qualify for the 7 year full unit replacement for compressor failure and lifetime compressor replacement.

# Multi-Zone Match Ups



## DIY® MULTI ZONE CONDENSER/AIR HANDLER MATCH UPS

Air handlers may be Ceiling Cassette or Wall Mounted

### DIY-MULTI2-18HP230C

#### TWO UNITS

9K + 9K      9K + 12K      12K + 12K

### DIY-MULTI3-27HP230C

#### TWO UNITS

9K + 9K      12K + 12K  
9K + 12K      12K + 18K  
9K + 18K      18K + 18K

#### THREE UNITS

9K + 9K + 9K      9K + 9K + 12K  
9K + 12K + 12K\*      9K + 12K + 18K  
12K + 12K + 12K\*      9K + 9K + 18K

### DIY-MULTI4-36HP230C

#### TWO UNITS

9K + 9K      9K + 12K      9K + 18K  
9K + 24K      12K + 12K      12K + 18K  
12K + 24K      18K + 18K

#### THREE UNITS

9K + 9K + 9K      9K + 9K + 12K      9K + 9K + 18K  
9K + 9K + 24K      9K + 12K + 12K      9K + 12K + 18K  
9K + 12K + 24K      9K + 18K + 18K      12K + 12K + 12K  
12K + 12K + 18K      12K + 18K + 18K      12K + 12K + 24K

#### FOUR UNITS

9K + 9K + 9K + 9K      9K + 9K + 9K + 12K      9K + 9K + 9K + 18K  
9K + 9K + 12K + 12K      9K + 9K + 12K + 18K      9K + 12K + 12K + 12K  
12K + 12K + 12K + 12K

### DIY-MULTI5-48HP230C

#### TWO UNITS

9K + 18K      9K + 24K      9K + 36K  
12K + 12K      12K + 18K      12K + 24K  
12K + 36K      18K + 18K      18K + 24K  
18K + 36K      24K + 24K      24K + 36K

#### THREE UNITS

9K + 9K + 9K      9K + 9K + 12K      9K + 9K + 18K      9K + 9K + 24K  
9K + 12K + 12K      9K + 12K + 18K      9K + 12K + 24K      9K + 18K + 18K  
9K + 18K + 24K      9K + 24K + 24K      12K + 12K + 12K      12K + 12K + 18K  
12K + 12K + 24K      12K + 18K + 18K      12K + 18K + 24K      12K + 24K + 24K  
18K + 18K + 18K      18K + 18K + 24K      9K + 9K + 36K      9K + 12K + 36K  
9K + 18K + 36K      12K + 12K + 36K

#### FOUR UNITS

9K + 9K + 9K + 9K      9K + 9K + 9K + 12K      9K + 9K + 9K + 18K  
9K + 9K + 9K + 24K      9K + 9K + 12K + 12K      9K + 9K + 12K + 18K  
9K + 9K + 12K + 24K      9K + 9K + 18K + 18K      9K + 9K + 18K + 24K  
9K + 12K + 12K + 12K      9K + 12K + 12K + 18K      9K + 12K + 12K + 24K  
9K + 12K + 18K + 18K      9K + 18K + 18K + 18K      12K + 12K + 12K + 12K  
12K + 12K + 12K + 18K      12K + 12K + 12K + 24K      12K + 12K + 18K + 18K  
9K + 9K + 9K + 36K

#### FIVE UNITS

9K + 9K + 9K + 9K + 9K      9K + 9K + 9K + 9K + 12K      9K + 9K + 9K + 9K + 18K  
9K + 9K + 9K + 9K + 24K      9K + 9K + 9K + 12K + 12K      9K + 9K + 9K + 12K + 18K  
9K + 9K + 9K + 18K + 18K      9K + 9K + 12K + 12K + 12K      9K + 9K + 12K + 12K + 18K  
9K + 12K + 12K + 12K + 12K      9K + 12K + 12K + 12K + 18K      12K + 12K + 12K + 12K + 12K

If all indoor units (handlers) run simultaneously, their combined BTU output will not exceed the BTU rating of the outdoor unit (condenser).