



King Supply Co.

1-866-352-6652

SLSHVC-355

SPECIFICATIONS

Push Button Shower Valve 86mm (Time Adjustable)

Concealed self-closing tap

GENERAL INFORMATION

Valve Type: Self Closing Metering Valve
Valve Activation: Manual Push Button Valve
Installation Type: Concealed Wall Mount
Body Material: Lead Free Solid Brass
Finish Type: Chrome Plated Finish

CONNECTIONS & DIMENSIONS


Connection Inlet: 1/2" MPT
Connection Outlet: 1/2" MPT
Escutcheon Plate Diameter: 4.5" (115mm)
Valve Body Length: 3 3/8" (86mm)

PRODUCT FEATURES

Time Adjustable: Yes, 3-40 Seconds
Temperature Adjustable: No
Built-in Premix: No
Lead Free and Corrosion Resistant
Water Saving Up To 85%!
Working Temperature Range: 40 Degrees F - 160 Degrees F

WHAT'S INCLUDED

Push Button Shower Valve
Escutcheon Plate (4 1/2 in Diameter)
Black Buffer Ring (36x42 mm)
Allen Wrench For Time Regulation (1.3 mm)
Compression Nuts With Brass Ferrules (1/2 in)

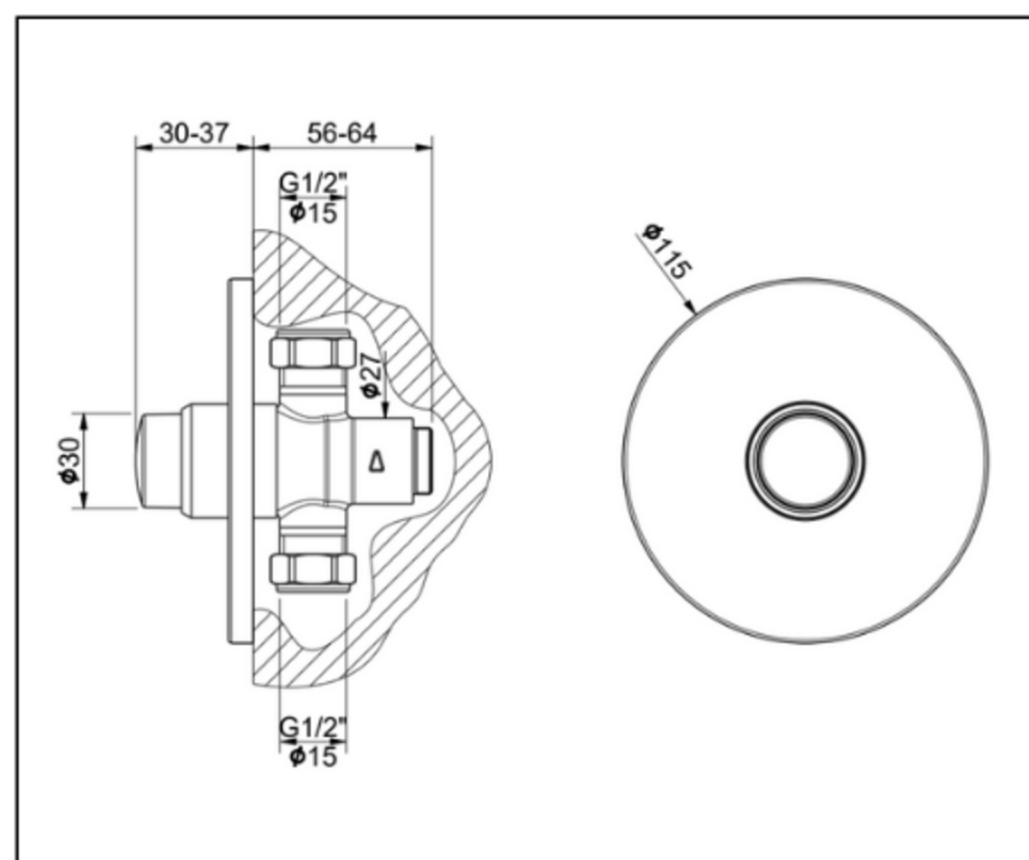

40-160 °F



0.5-6 bar
2-4 bar (Recommended)



16 l/min (3 bar)



1/2" MPT



EN 12540, EN 1982,
EN 12164, EN 12165,
EN 816, ISO 9227
ADA COMPLIANT



15 Year Warranty


KING SUPPLY COMPANY
16 WHITINS RD
SUTTON, MA 01590
1 (866) 352-6652
INFO@KINGSUPPLY.COM

SLSHVC-355

100% Made in Italy

DIAGRAM

Push Button Shower Valve 86mm (Time Adjustable)
Concealed self-closing tap

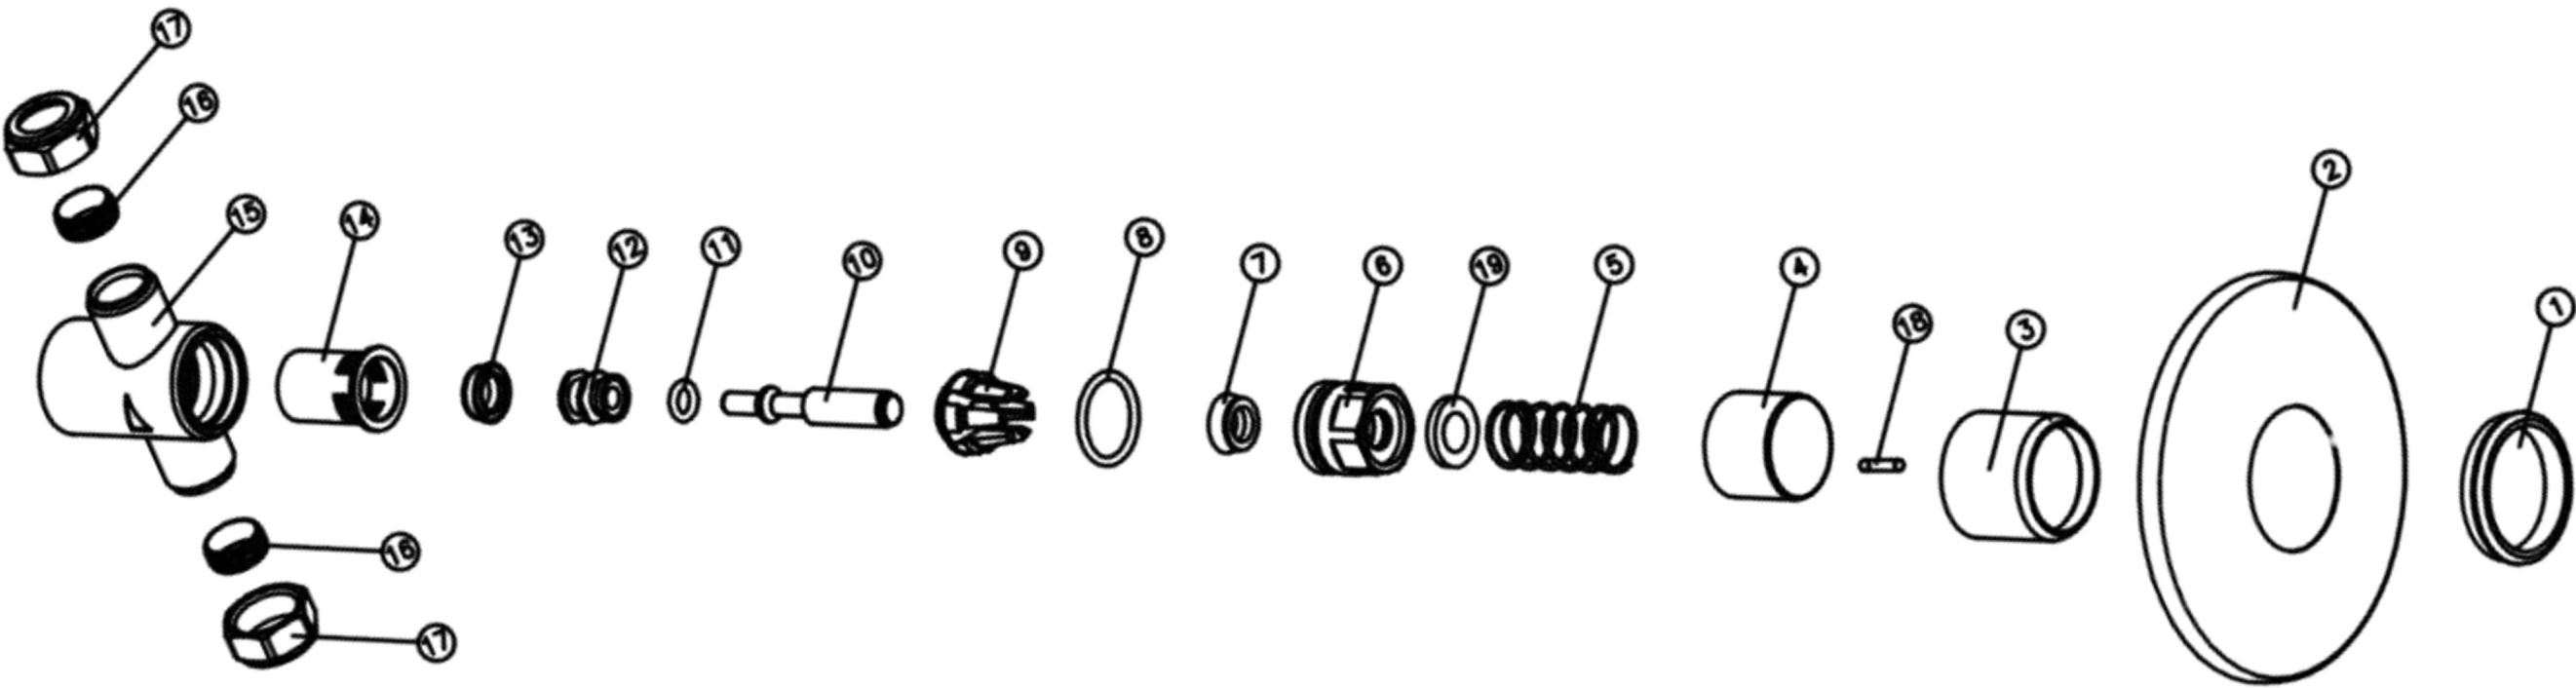

Position	Description
1	Black Buffer Ring (36 x 42)
2	Rosette Plate
3	Tang (33 x 19)
4	Push Button
5	Spring
6	Head Valve
7	Gasket
8	O-Ring (20 x 2.5)
9	Turret for Head Valve
10	Stem
11	O-Ring (6 x 2.5)
12	Valve
13	Gasket
14	Cup
15	Tap Body
16	Ferrule
17	Compression Nut
18	Screw
19	Steel Washer for Time Adjustment