



Chemical Consultants INCORPORATED

GR-6 "V"

Multi-Purpose Screen Wash

GENERAL DESCRIPTION

GR-6 "V" is a water soluble ink degradant. It is highly effective on plastisol, multi-purpose (solvent based), poster, UV, and vinyl inks. GR-6 "V" will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary.

GR-6 "V" can be used in a wide variety of innovative cleaning processes ranging from re-circulation machines, dip tanks, immersion cleaning processes, and automatic reclaiming machines. It can also be applied manually with a scrub pad, spray bottle, or pneumatic pump systems.

GR-6 "V" is also an excellent plastisol ink haze (ghost) remover. It is non-hazardous (non-corrosive) and aggressively removes image stains from the mesh.

ADVANTAGES

- Low Odor
- High Solvency
- High load capacity to reduce usage
- High flash point / Non-flammable
- Non-Hazardous
- Mesh safe
- Multiple applications


APPLICATIONS

Always card excessive ink from screen. Use one of the following applications.

Quick Tip:

Always pressure wash screen from the bottom and work upwards.

This will prevent ink from locking back onto the mesh when coming in contact with the rinse water.

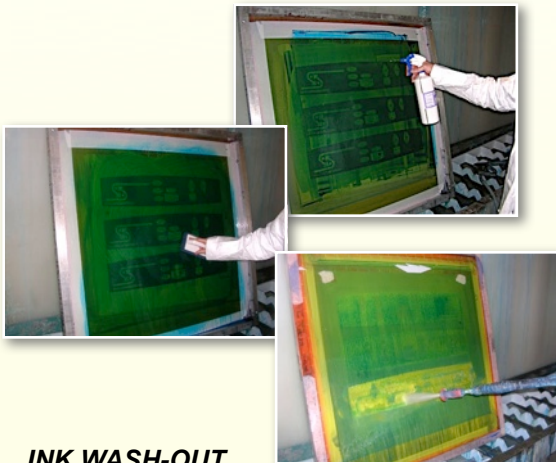

INK WASH-OUT AT THE SINK:

Card excessive ink from the screen. Apply GR-6 "V" to ink side of screen. Use a non-abrasive scrub brush or pad to agitate ink on both sides of screen. Finally, rinse away all residue away using high pressure water.



Haze Remover:

After ink and emulsion has been removed, spray GR-6 "V" on both sides of the screen. Scrub screen both sides with a non-abrasive brush or pad. Allow product to dwell a few minutes (depending on severity of stain). High pressure rinse screen working from bottom and moving upwards.

4 x 4 Stainless Steel Recirculating Booth

[Click here for more details.](#)



RECIRCULATING WASH:

Card excessive ink from the screen. This product can be continuously recirculated until product becomes too heavily soiled with solids. Used product may be filtered and reused.

Packaging

1 gallon 5 gallon pail 30 gallon drum 55 gallon drum