

PRODUCT:

SPINDLE PENDANT CLUSTERS

TECH SPEC

Manufactured to BS EN 60598-1:2015

Last updated: 19.10.2022 (VR)

PRODUCT

WEB LINK:

→ [rothschildbickers.com/spindle-pendant-clusters](https://rothschildbickers.com/spindle-pendant-clusters)

LAMPHOLDER:

Standard: E14 or E12 (USA) / SES bulb

ELECTRICAL:

AC 220-240V Nominal frequency 50Hz

AC 110 O 120V Normal frequency 60Hz (USA)

MAX WEIGHT INC. 2M FLEX

Standard: 4.5KG

CEILING PLATE:

Standard: 265mm

MINIMUM DROP

Standard: 1210mm



OPTIONS

SHAPE:

2 x 4 Bubble, 1 x 3 Bubble

METAL FINISH:

Plates available in powder coated White only

Looms available in Polished Brass or Polished Nickel

FLEX:

Standard colours & styles (3 core)

→ [rothschildbickers.com/flex](https://rothschildbickers.com/flex)

Supplied standard with 2m (can be cut on site)

Extra length up to 12m on request

GLASS COLOUR:



Clear only

GLASS FINISH:

Optic only

INCLUDED IN THE BOX & DIMENSIONS

- 3 x Glass shades
- 3 x Electrical looms wired with flex
- 1 x Standard 265mm D ceiling plate
- 1 x Ceiling plate back strap & fixings
- 4 x Side fixing screws
- 3 x Wago connectors & earth lead
- 3 x E14 Bulbs (UK & EU only)
- \*No bulb supplied for USA (self-ballasted LED lamp)
- 1 x Installation guide

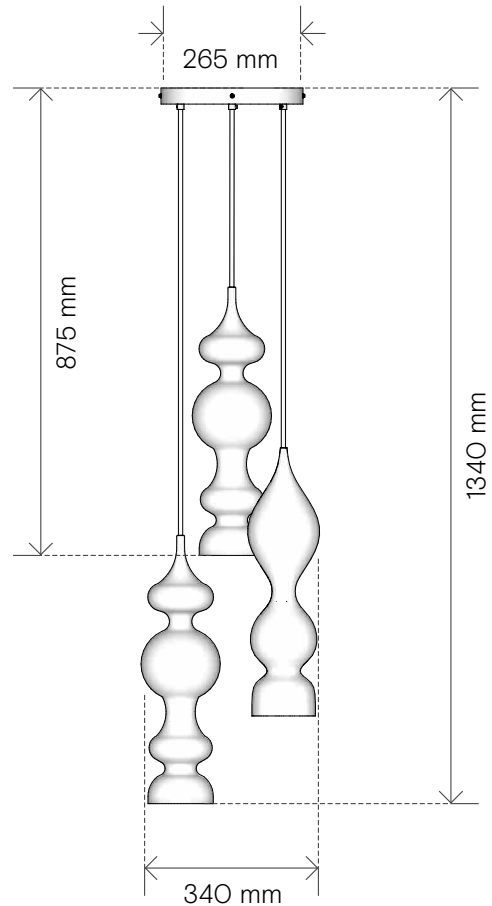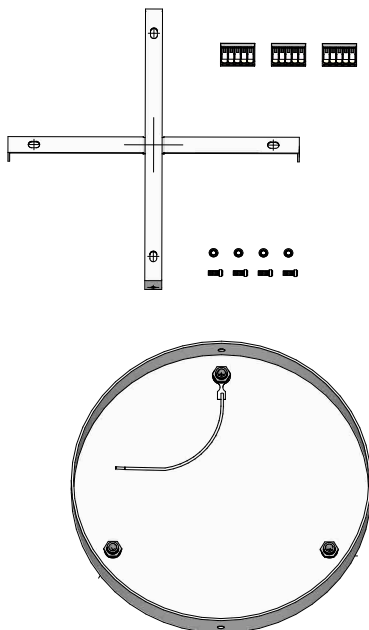

Recommended drop height shown (1340mm)  
\*Minimum 1210mm