PRODUCT:

LANTERN PETITE CLUSTERS

TECH SPEC Last updated: 19.12.2022 (VR)

PRODUCT

Manufactured to BS EN 60598-1:2015

WEB LINK:

→ rothschildbickers.com/lantern-petite-clusters

LAMPHOLDER:

Standard: E14 or E12 (USA) / SES bulb

ELECTRICAL:

AC 220-240V Nominal frequency 50Hz AC 110 O 120V Normal frequency 60Hz (USA)

MAX WEIGHT INC. 2M FLEX Standard: 4.5KG

CEILING PLATE:

Standard: 265mm

MINIMUM DROP Standard: 800mm







OPTIONS

SHAPE:

Petite

METAL FINISH:

Plates available in powder coated White only

Looms available in All standard colours

→ rothschildbickers.com/metal

Standard colours & styles (3 core)

→ rothschildbickers.com/flex

Supplied standard with 2m (can be cut on site)

Extra length up to 12m on request

GLASS COLOUR:

Standard colours -


→ rothschildbickers.com/glass-colours


GLASS FINISH:

Plain and Optic only

INCLUDED IN THE BOX & DIMENSIONS

- 3 x Glass shades
- 3 x Electrical looms wired with flex
- 1x Standard 265mm D ceiling plate
- 1 x Ceiling plate back strap & fixings
- 4 x Side fixing screws
- 3 x Wago connectors & earth lead
- 3 x E14 Bulbs (UK & EU only)
- *No bulb supplied for USA (self-ballasted LED lamp)
- 1x Installation guide



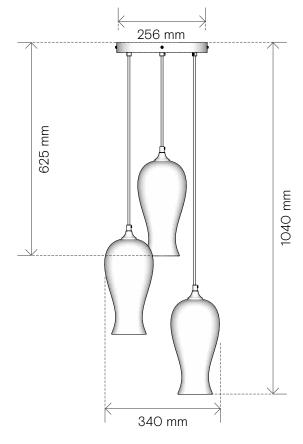

Recommended drop height shown (1040mm) *Minimum 800mm