

PRODUCT:

SPINDLE SHADES

TECH SPEC

Manufactured to BS EN 60598-1:2015

Last updated: 12.12.2022 (VR)

PRODUCT

WEB LINK:

→ rothschildbickers.com/spindle-shade

LAMPHOLDER:

E14 or E12 (USA) / SES bulb

ELECTRICAL:

AC 220-240V Nominal frequency 50Hz

AC 110 O 120V Normal frequency 60Hz (USA)

MAX WEIGHT INC. 2M FLEX

Standard: 1.4kg

STANDARD CEILING ROSE:

Petite, Empire or Classic rose included -

→ rothschildbickers.com/ceiling-roses

*For all USA a larger 4.7 inch ceiling canopy is provided to fit over Connector box which is not supplied.

OPTIONS

SHAPE:

Standard

METAL FINISH:

Standard colours → rothschildbickers.com/metal

FLEX:

Standard colours & styles (3 core)

→ rothschildbickers.com/flex

Supplied standard with 1.5M - can cut to length on site

Extra length up to 12M on request

GLASS COLOUR:

Standard colours -

→ rothschildbickers.com/glass-colours


GLASS FINISH:

Plain only



INCLUDED IN THE BOX

- 1 x Glass shade
- 1 x Electrical loom wired with flex
- 1 x Standard ceiling canopy
- 1 x Ceiling rose bracket, screws and washers
- 3 x Wago Connectors or junction box
- 1 x E14 LED Bulb (UK/EU only)
- *No bulb supplied for USA (self-ballasted LED lamp)
- 1 x Installation guide

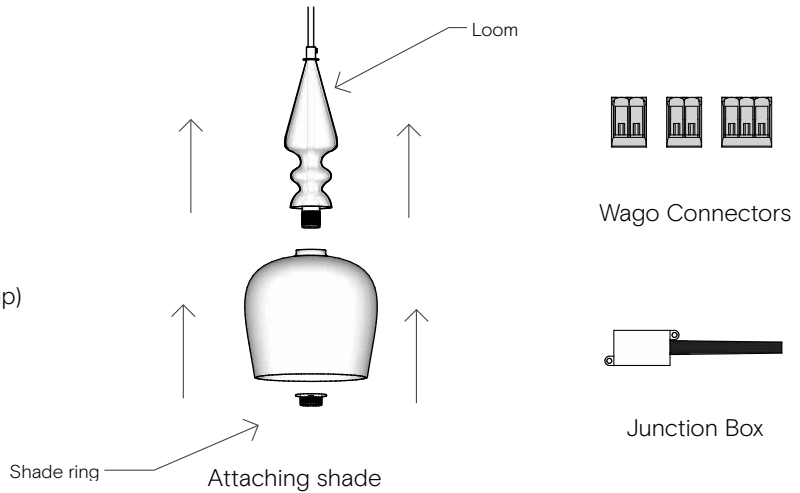

DIMENSIONS

STANDARD

