

PRODUCT:

POP STANDARD CLUSTER

TECH SPEC

Manufactured to BS EN 60598-1:2015

Last updated: 19.12.2022 (BE)

PRODUCT

WEB LINK:

→ rothschildbickers.com/pop-standard-clusters

LAMPHOLDER:

Standard: E14 or E12 (USA) / SES bulb

ELECTRICAL:

AC 220-240V Nominal frequency 50Hz

AC 110 O 120V Normal frequency 60Hz (USA)

MAX WEIGHT INC. 2M FLEX

Standard: 5.5KG

CEILING PLATE:

Standard: 265mm

MINIMUM DROP

Standard: 890mm



OPTIONS

SHAPE:

Standard

METAL FINISH:

Plate available in powder coated White
looms available in all standard colours

→ rothschildbickers.com/metal

FLEX:

Standard colours & styles (3 core)

→ rothschildbickers.com/flex

Supplied standard with 2m (can be cut on site)

Extra length up to 12m on request

GLASS COLOUR:

Standard colours -



→ rothschildbickers.com/glass-colours

GLASS FINISH:

Plain, Diamond and Optic

INCLUDED IN THE BOX & DIMENSIONS

- 3 x Glass shades
- 3 x Electrical looms wired with flex
- 1 x Standard 265mm D ceiling plate
- 1 x Ceiling plate back strap & fixings
- 4 x Side fixing screws
- 3 x Wago connectors & earth lead
- 3 x E14 Bulb (UK & EU only)
- *No bulb supplied for USA (self-ballasted LED lamp)
- 1 x Installation guide

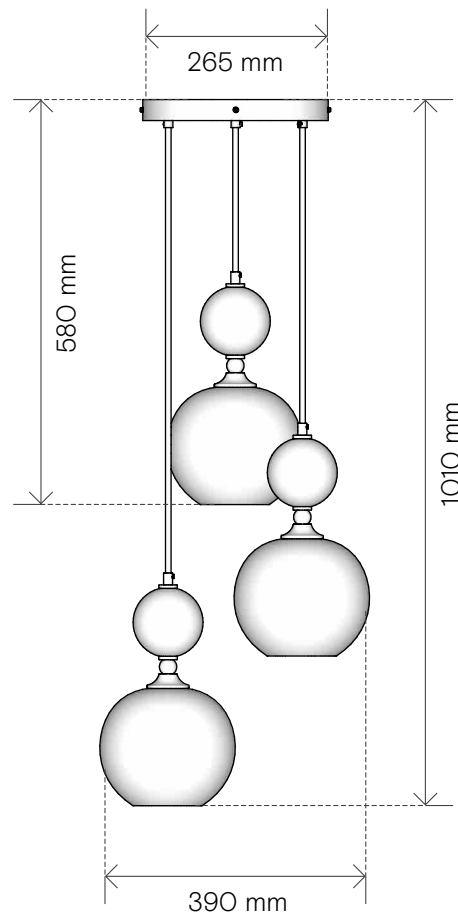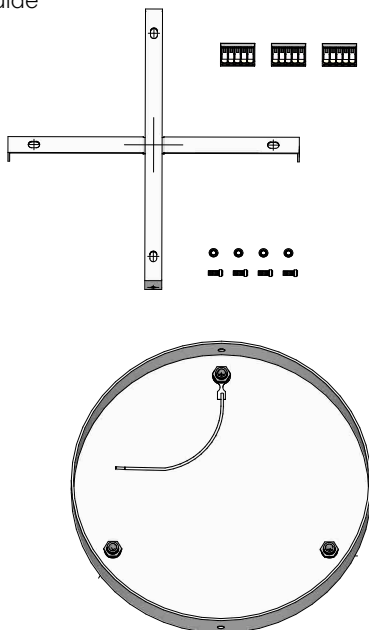

Recommended drop height shown (1010mm)
*Minimum 890mm