

# BAR FRIDGES

*Cooling the Beers of a Nation* *New Zealand*

## New Zealand's best range of chillers

### MODEL: ENV1R-SD

#### QUICK INFO

#### PARTS AND ENERGY INFO

- 12Volt Fans
- Cyclopentane foaming
- ECO controller
- Energy saving inverter compressor
- German energy saving EBM fans
- LED lighting
- R600 100% ozone safe gas
- Solid Door
- Noctua Silent and Quiet Fans From Norway
- Meanwell Transformer From Taiwan
- USA Cherry Brand Switches
- Philips LED Lighting (Same Factory)



#### SPECIFICATIONS

Capacity (litres)	148
Holds (cans)	140
Noise Level	43
Consumption	1.03Kwh/24Hrs
Unit dimensions (WxDxH)	600 x 575 x 840
Lockable	Yes
Gross weight	59 kg


\*\*Specifications and price of this product may change at any time

\*\*For more information about this product please call us or visit our website.

  
www.rhinoequipment.eu

## PRODUCT INFORMATION

### ENV1R-SD

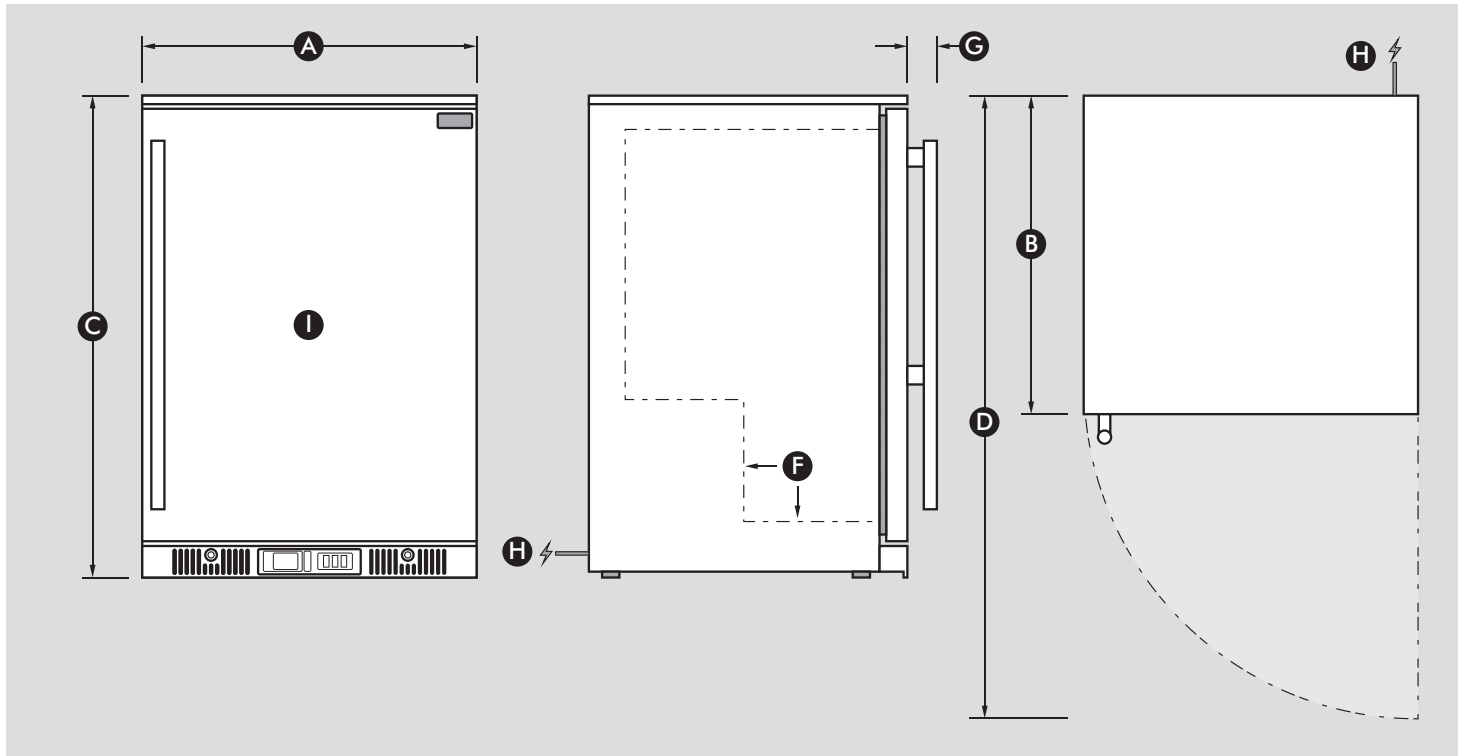

### INFORMATION

#### DIMENSIONS

Ⓐ	Overall width	600mm
Ⓑ	Overall depth	575mm
Ⓒ	Overall height - includes feet	840mm
Ⓓ	Overall depth with door open	1045mm
Ⓔ	Height of higne cap (included in height above)	N/A
Ⓕ	Internal step inside unit	195mm In & 190mm High
Ⓖ	Depth of handle (adds to depth above)	40mm
Ⓗ	Power cord location & length	190mm
Ⓘ	Internal dimensions (WxDxH)	520 x 440 x 680mmH

Note: Door opens maximum 3mm outside diameter

#### INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH)	620 x 600 x 850mmH
Venting type of fridge	FRONT (Through Grill)

*\*\*Note: If wanting a 'cabinet door' in front of fridge door please contact us\*\**

#### OTHER HELPFUL INFORMATION

Height floor to bottom of door	65mm
Door size (WxH)	597 x 750mm
Feet height fully tightened	20mm
Height adjustment available on current feet	10mm
Change feet size for extra height option	Large Feet Add 20mm
Shelf Qty / Size	2 x Flat (500 x 395mm)
Wine Shelf available (Y/N)	Y

#### PERFORMANCE

Cooling	Cools easily to minus 1 (-1oC)
Application suitability	Commercial / Alfresco / Indoor
Maximum operating ambient temperature	47oC
Outdoor official rating	IP24