

New Zealand's best range of chillers

MODEL: HUS-SC50AB

QUICK INFO



PARTS AND ENERGY INFO

- 12Volt Fans
- Cyclopentane foaming
- LED lighting
- LOW E glass
- R600 100% ozone safe gas

SPECIFICATIONS

Capacity (litres)
Holds (cans)
Noise Level
Consumption
Unit dimensions (WxDxH)
Lockable
Gross weight

50 38 41 1.10Kwh/24Hrs 435 x 500 x 510 Yes 16 kg



**Specifications and price of this product may change at any time


**For more information about this product please call us or visit our website.

WWW.BARFRIDGES.CO.NZ



PRODUCT INFORMATION

HUS-SC50AB

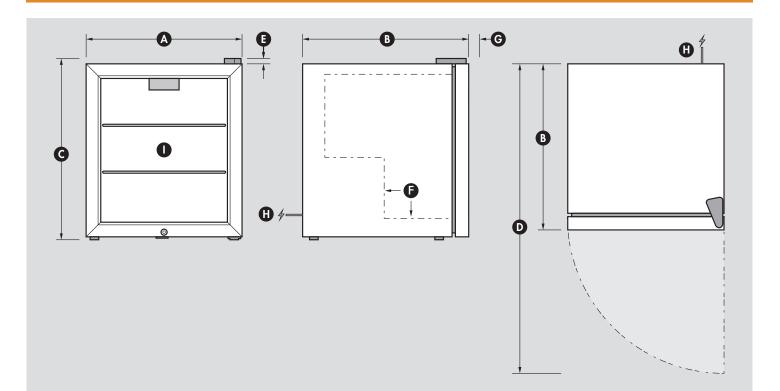

INFORMATION

DIMENSIONS

(A)	Overall width		430mm
B	Overall depth		490mm
Ô	Overall height - includes feet		510mm
Ď	Overall depth with door open		890mm
Ē	Height of hinge cap (included in height above) 10mm		
F	Internal step inside unit	210mm In & 190)mm High
G	Depth of handle (adds to depth above)		35mm
Ĥ	Power cord location & length		1800mm
Ĩ	Internal dimensions (WxDxH)	340 x 380 x	420mmH

Note: Door opens maximum 10mm outside fridge diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH) 470 x 530 x 530mmH REAR - A rear vent would lessen Venting type of fridge run times.

Note: If wanting a 'cabinet door' in front of fridge door please contact us

OTHER HELPFUL INFORMATION

Height floor to bottom of do	20mm	
Door size (WxH)	435 x 480mmH	
Feet height fully tightened	15mm	
Height adjustment available	None	
Change feet size for extra height option		N/A
Shelf Qty / Size	1 x (345x310mmD) & 1	x (345x205mmD)
Wine Shelf available (Y/N)		Yes

PERFORMANCE

Cooling	Can cool to 0oC (Zero)
Application suitability	Indoor
Maximum operating ambient temperature	32oC
Meps energy approved & food grade	Yes