

New Zealand's best range of chillers

MODEL: SG3S-B

QUICK INFO

Rhino Sliding 3 Door Commercial Bar Fridge. Glass door fridges designed especially for outdoor alfresco areas, pubs and clubs. Units encompass the best brand name parts available in the world, designed by the best engineers and built by a quality long term manufacturer, to bring a reliable energy efficient product to the market.



PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- LOW E glass
- R600 100% ozone safe gas
- EBM Fans
- Electronic Controller
- LG Compressor
- Meanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)

SPECIFICATIONS

Capacity (litres)	
Holds (cans)	
Noise Level	
Consumption	
Unit dimensions (WxDxH)	
Lockable	
Gross weight	

330 350 47 2.24Kwh/24Hrs 1350 x 500 x 840 Yes 98 kg




**Specifications and price of this product may change at any time

**For more information about this product please call us or visit our website.



PRODUCT INFORMATION

SG3S-B

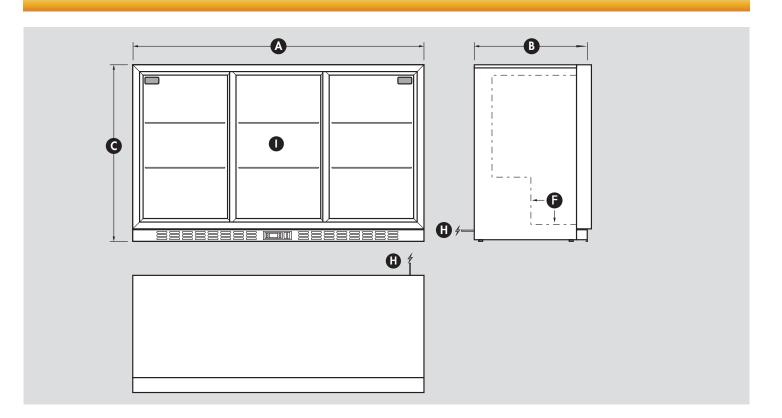

INFORMATION

DIMENSIONS

(A)	Overall width		1350mm
B	Overall depth		515mm
Ô	Overall height - includes feet		840mm
\bigcirc	Overall depth with door open		N/A
Ē	Height of hinge cap (included in	n height above)	N/A
F	Internal step inside unit	190mm In & 19	0mm High
Ğ	Depth of handle (adds to depth above)		N/A
Ĥ	Power cord location & length		1800mm
(Internal dimensions (WxDxH)	1270 x 380 :	x 680mmH

Note: Door opens inside fridge diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH)1360 x 600 x 850mmHVenting type of fridgeFront Venting, Through Grill

Note: If wanting a 'cabinet door' in front of fridge door please contact us

OTHER HELPFUL INFORMATION

Height floor to bottom of door	65mm
Door size (WxH)	450 x 730mm
Feet height fully tightened	15mm
Height adjustment available on current feet	10mm
Change feet size for extra height option	30mm
Shelf Qty / Size	6 x (445mmW x 345mmD)
Wine Shelf available (Y/N)	Yes

PERFORMANCE

Cooling	Cools easily to (1oC)
Application suitability	Commercial / Alfresco / Indoor
Maximum operating ambient temper	ature 38oC
Outdoor official IP rating	IP22
Meps Energy Approved & Food Grac	le Yes