


Specifications

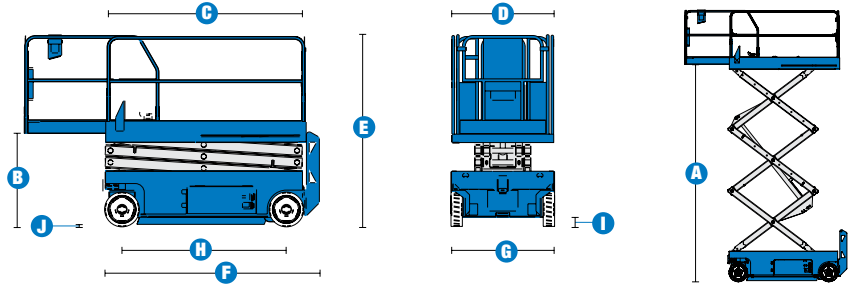

| MODELS | GS™-2046 | | GS™-2646 | | GS™-3246 | |
|--|----------|---------------|----------|---------------|----------|---------------|
| MEASUREMENTS | Metric | US | Metric | US | Metric | US |
| Working height maximum* | 8.10 m | 26 ft | 9.92 m | 32 ft | 11.75 m | 38 ft |
| A Platform height maximum | 6.10 m | 20 ft | 7.92 m | 26 ft | 9.75 m | 32 ft |
| B Platform height stowed | 1.04 m | 3 ft 4.8 in | 1.16 m | 3 ft 9.6 in | 1.29 m | 4 ft 2.75 in |
| C Platform length - outside | 2.26 m | 7 ft 5 in | 2.26 m | 7 ft 5 in | 2.26 m | 7 ft 5 in |
| extended | 3.18 m | 10 ft 5 in | 3.18 m | 10 ft 5 in | 3.18 m | 10 ft 5 in |
| Slide-out platform extension deck | 0.91 m | 3 ft | 0.91 m | 3 ft | 0.91 m | 3 ft |
| D Platform width - outside | 1.15 m | 3 ft 9.3 in | 1.15 m | 3 ft 9.3 in | 1.15 m | 3 ft 9.3 in |
| Guardrail height | 1.09 m | 3 ft 7 in | 1.09 m | 3 ft 7 in | 1.09 m | 3 ft 7 in |
| Toeboard height | 0.15 m | 6 in | 0.15 m | 6 in | 0.15 m | 6 in |
| E Height - stowed: folding guardrails | 2.13 m | 7 ft | 2.26 m | 7 ft 5 in | 2.39 m | 7 ft 10 in |
| rails folded | 1.55 m | 5 ft 1 in | 1.68 m | 5 ft 6 in | 1.80 m | 5 ft 11 in |
| F Length - stowed | 2.41 m | 7 ft 11 in | 2.41 m | 7 ft 11 in | 2.41 m | 7 ft 11 in |
| extended | 3.31 m | 10 ft 10.5 in | 3.31 m | 10 ft 10.5 in | 3.31 m | 10 ft 10.5 in |
| G Width | 1.17 m | 3 ft 10 in | 1.17 m | 3 ft 10 in | 1.17 m | 3 ft 10 in |
| H Wheelbase | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in |
| I Ground clearance - centre | 0.10 m | 4 in | 0.10 m | 4 in | 0.10 m | 4 in |
| J - with pothole guards deployed | 0.02 m | 0.75 in | 0.02 m | 0.75 in | 0.02 m | 0.75 in |

| PRODUCTIVITY | | | | | | |
|---------------------------------------|------------------|----------------|------------------|----------------|------------------|----------------|
| Maximum platform occupancy** - indoor | 2 | 2 | 2 | 2 | 2 | 2 |
| - outdoor | 2 | 2 | 2 | 2 | 1 | 1 |
| Lift capacity | 544 kg | 1,200 lbs | 454 kg | 1,000 lbs | 318 kg | 700 lbs |
| Lift capacity - extension deck | 113 kg | 250 lbs | 113 kg | 250 lbs | 113 kg | 250 lbs |
| Drive speed - stowed | 3.5 km/h | 2.2 mph | 3.5 km/h | 2.2 mph | 3.5 km/h | 2.2 mph |
| Drive speed - raised | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph |
| Gradeability - stowed*** | 30% | 30% | 30% | 30% | 25% | 25% |
| Turning radius - inside | zero | zero | zero | zero | zero | zero |
| Turning radius - outside | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in |
| Raise / lower speed | 30 / 33 sec | 30 / 33 sec | 30 / 38 sec | 30 / 38 sec | 57 / 35 sec | 57 / 35 sec |
| Controls | proportional | | proportional | | proportional | |
| Drive | dual front wheel | | dual front wheel | | dual front wheel | |
| Multiple disc brakes | dual rear wheel | | dual rear wheel | | dual rear wheel | |
| Tyres - solid non-marking | 38 x 13 x 28 cm | 15 x 5 x 11 in | 38 x 13 x 28 cm | 15 x 5 x 11 in | 38 x 13 x 28 cm | 15 x 5 x 11 in |

| POWER | | | | | | |
|---------------------------|-------------------------------------|----------|----------------------------------|----------|----------------------------------|---------|
| Power source | 24 V DC (four 6 V 225 Ah batteries) | | 24 V (four 6 V 225 Ah batteries) | | 24 V (four 6 V 225 Ah batteries) | |
| Hydraulic system capacity | 14.2 L | 3.75 gal | 14.2 L | 3.75 gal | 17 L | 4.5 gal |

| WEIGHT**** | | | | | | |
|------------|----------|-----------|----------|-----------|----------|-----------|
| | 1,974 kg | 4,351 lbs | 2,447 kg | 5,395 lbs | 2,812 kg | 6,200 lbs |

| STANDARDS COMPLIANCE | ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10 |
|----------------------|---|
|----------------------|---|

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** CE/AUS markets: Two person maximum occupancy on all models. GS-3246 outdoor maximum occupancy is one person.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2046

- 8.10 m (26 ft) working height
- Up to 545 kg (1,200 lbs) lift capacity

GS™-2646

- 9.92 m (32 ft) working height
- Up to 454 kg (1,000 lbs) lift capacity

GS™-3246

- 11.75 m (38 ft) working height
- Up to 318 kg (700 lbs) lift capacity

PRODUCTIVITY

- 2.26 m x 1.15 m (7 ft 5 in x 3 ft 9 in) steel platform
- 0.91 m (3 ft) extension deck
- Folding rails with full height swing gate
- Dual front wheel drive
- Proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- Onboard diagnostic system
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Drive speed interlock
- Swing-out component tray
- Solid non-marking tyres
- Pothole guards
- Tilt alarm
- Descent alarm
- Electronic horn
- Hour meter
- Dual flashing beacons
- Motion alarm

POWER

- 24 V DC (four 6 V 225 Ah batteries)
- Universal 20 amp smart charger

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Pipe cradle (GS™-2646)
- Panel mounted, recessed charger receptacle
- Platform work lights
- Automotive horn

POWER OPTIONS

- Maintenance-free batteries
- EE rating
- 240 V power to platform



Distributed by: Auslift Equipment
2/2-4 Souffi Place,
Dandenong South. Vic.3175
Telephone : 03 9702 7977
Email: sales@auslift.com.au
Website: www.auslift.com.au

AUSLIFT
EQUIPMENT