

## Specifications

Model	Z-60/37FE	
Measurements	Metric	US
Working height maximum*	20.16 m	65 ft 7 in
Platform height maximum	18.16 m	59 ft 7 in
Horizontal reach maximum	11.15 m	36 ft 7 in
Up and over clearance maximum	7.39 m	24 ft 3 in
▲ Platform length	0.91 m	3 ft
▲ Platform width	2.44 m	8 ft
▲ Height - stowed	2.54 m	8 ft 4 in
Height - transport (jib tucked under)	2.62 m	8 ft 7 in
▲ Length - stowed	8.15 m	26 ft 9 in
Length - transport (jib tucked under)	6.30 m	20 ft 8 in
▲ Width	2.49 m	8 ft 2 in
▲ Wheelbase	2.49 m	8 ft 2 in
▲ Ground clearance - center	0.33 m	1 ft 1 in

### Productivity

Lift capacity	227 kg	500 lbs
Platform rotation	160°	160°
Vertical jib rotation	135°	135°
Turntable rotation	355° non-continuous	
Turntable tailswing - riser up	0.58 m	1 ft 11 in
Turntable tailswing - riser down	0.81 m	2 ft 8 in
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised**	1.0 km/h	0.7 mph
Gradeability - stowed***	45%	45%
Turning radius - inside	2.51 m	8 ft 3 in
Turning radius - outside	5.69 m	18 ft 8 in
Controls	24V DC proportional	
Tyres	355/55D 625	

### Power

Drive system	34 V 3-Phase AC	
Power source	48 V DC (eight 6 V batteries) 390 Ah capacity 24.8 hp (18.5 kW) Kubota D1105 T4f driven AC generator	
Auxiliary power unit	12 V DC	12 V DC
Hydraulic tank capacity	68.4 L	18 gal
Fuel tank capacity	64.4 L	17 gal

### Sound & Vibration Levels

Sound pressure level (ground workstation)	77 dBA
Sound pressure level (platform workstation)	72 dBA
Vibration	0.55 m/s <sup>2</sup> (1.81 ft/s <sup>2</sup> )




### Weight\*\*\*\*

Z-60/37FE	7,686 kg	16,944 lbs
-----------	----------	------------

### Standards Compliance

AS 1418.10

### Range Of Motion Z-60/37FE

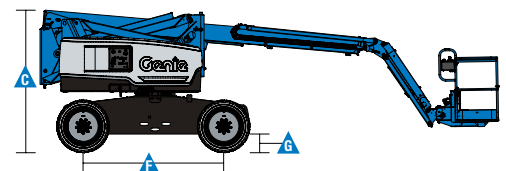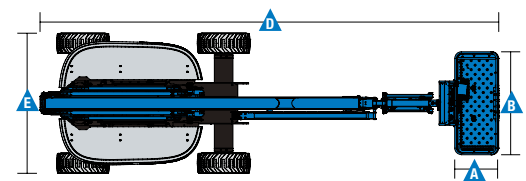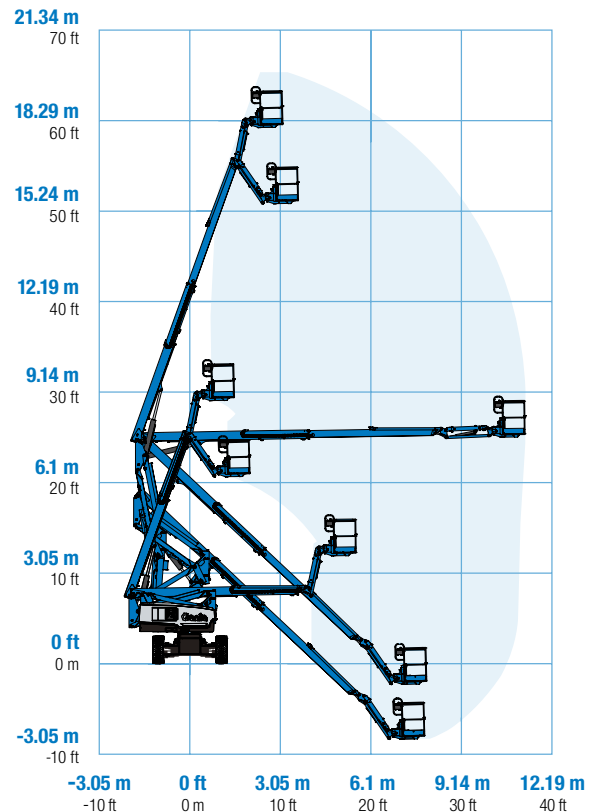

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.

\*\*\* Gradeability applies to driving on slopes. See operators manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.

## Features

### Standard Features

#### Measurements

- 20.16 m (65 ft 7 in) working height
- 11.15 m (36 ft 7 in) horizontal reach
- 7.39 m (24 ft 3 in) up and over clearance
- Up to 227 kg (500 lbs) lift capacity

#### Productivity

- 1.52 m (5 ft) jib boom with 135° working range
- Digital hour meter with battery charge indicator and diagnostic readout
- 4 Wheel AC electric drive system
- Variable speed high efficiency hydraulic power unit
- Self-levelling platform
- Hydraulic platform rotation
- Proportional joystick controls
- Telematics Ready Connector
- Thumb rocker steering
- Drive enable
- AC power cord to platform
- Horn
- Hour meter
- Tilt alarm
- Descent & travel alarms
- Flashing beacon
- Tilt cut-out
- 355° non-continuous turntable rotation
- Locking turntable covers
- Positive traction drive
- Certified load sensor
- Lockable platform control box cover

#### Power

- 48 V DC battery pack (390 Ah)
- 12 V DC auxiliary power
- 25 A temperature compensated smart charge system
- Battery charge indicator
- Low battery voltage interrupt

#### Platform

- Steel 2.44 m (8 ft) tri entry with side swing gate

#### Engine

- 18.5 kW (24.8 hp) Kubota T4 diesel

#### Drive

- 4WD Electric AC

#### Axle

- Active oscillation

#### Tyres

- Rough terrain non-marking foam filled

### Options & Accessories

#### Productivity Options

- Half mesh platform inserts
- Air line to platform
- 240 V power to platform
- Work lights package
- Biodegradable hydraulic oil
- Operator Protective Structure
- Operator Protective Alarm



Distributed By: **Auslift Equipment**  
2/2-4 Souffi Place  
Dandenong South, Vic. 3175  
Telephone: 03 9702 7977  
Email: sales@auslift.com.au  
Website: www.auslift.com.au

**AUSLIFT**  
EQUIPMENT

Effective Date: July, 2015. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2015 Terex Corporation.