
36AM Push Around Vertical Lift





131 JLG

www.jlg.com.au

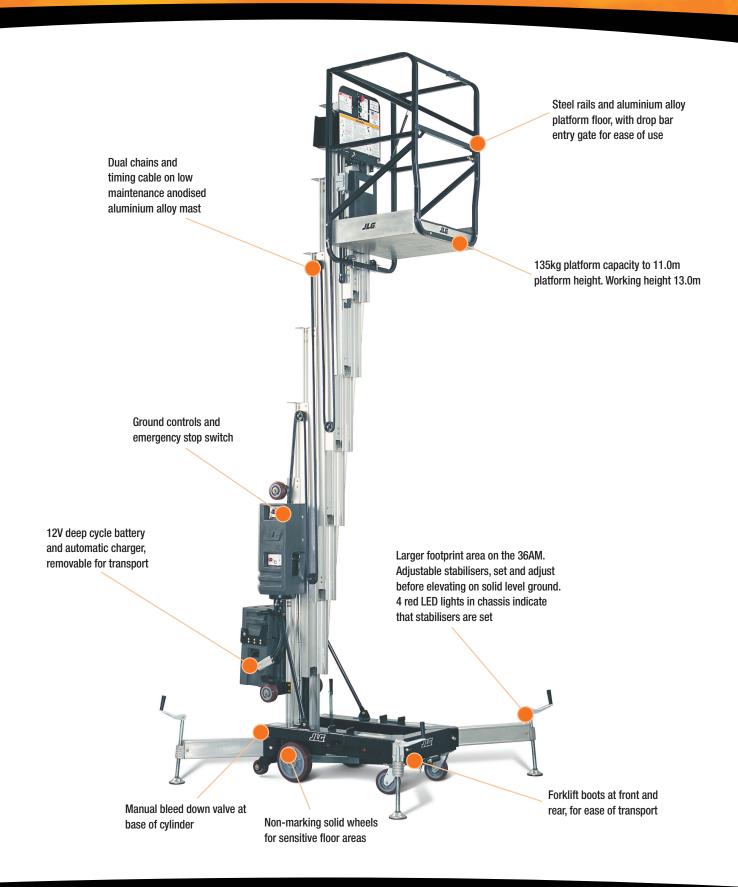

QUESTIONS TO ASK

- What are the ground conditions in the work area?
- What are the floor load requirements and access to the site?
- What is the working height needed for the job?
- Is there 240V AC power available for charging?
- Is indoor and flat hard support surface needed?

KEY SELLING POINTS

- Work in tight and confined vertical areas
- 4 easy fit outriggers with interlock switch and telltale light indicating each outrigger is locked and set
- Base can be levelled on outriggers
- Dual chain vertical mast lift
- Non-marking solid tyres
- 1 x 12V DC deep cycle battery
- Removable SCR automatic battery charger for quick recharging

APPLICATIONS

- Facilities maintenance
- Electricians for lighting tube/globe replacements
- All maintenance work
- Factory fit outs in tight areas
- Ideal warehouse use between racking and narrow aisle areas
- Hospitals, schools and offices for suspended ceiling maintenance

SPECIFICATIONS

Performance:	
Platform Height (max.)	11.00m
Working Height	13.00m
Lift Time	120 sec
Lower Time	50 sec
Platform Capacity Standard	135kg
Dimensions:	
Stowed Length	1.38m
Stowed Height	2.64m
Height Titled Back	1.94m
Stabiliser Footprint Length	2.02m
Stabiliser Footprint Width	2.00m
Platforms:	
Standard Platform Type	Steel Rail/Alloy Floor
Overall Width	0.74m
Standard Platform Size - (WxL)	0.66 x 0.66m
Chassis Length	1.38m
Platform Entry Height	0.48m
Power:	
Power Source	Battery
DC Voltage	12V
DC Power	93 Amp hr
Weights and Capabilities:	
GVW AC	481kg
GVW DC	526kg



www.jlg.com.au