2632 ES

NARROW ELECTRIC SCISSOR LIFT





Performance

Platform Height-Elevated 7.77 m Platform Capacity 230/360 kg Capacity on Platform 120 kg Extension Lift/Lower Time 33/37 seconds Maximum Drive Height Fully Elevated Weights 2,145 kg Drive Speed-Elevated 0.8 km/h Drive Speed-Lowered 4.43 km/h Gradeability 25% Turning Radius (Inside) Zero Turning Radius (Outside) 2.06 m

Standard Specifications

Power Source

Batteries 4x6V 220 amp-hr Charger 20 Amp Automatic Drive 24V Electric 8hp

Hydraulic Reservoir

- Capacity 4.73 L
- Fixed Displacement Gear • Pump

Tyres

• Tyre Size/Type 16 x 5 in. Non-Marking Solid

Brakes

• Electric/Friction

Standard Features

- Proportional Controls
- Industry Leading Duty Cycles
- Self Closing and Locking Gate
- Battery Condition Indicator
- Fold-Down Guard Rails
- Slide-Out Battery Trays
- Automatic Traction Control (ATC)
- All Motion Alarm
- 20 Amp Automatic SCR Charger
- Horn
- Hourmeter
- Manual Descent Pull Cable
- Tilt Alarm and Light

- Moveable, Removable Platform Control
- Powder-Coated
- Console with Rail Mounting Bracket
- Nickel Plated Pins
- Lubrication Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Mechanised Pothole Protection
- Machine Tie Downs
- · Fork Lift Pockets. Lift from Side and Rear
- Flashing Amber Beacon
- Load Sensing System
- Lifting Lugs


Accessories & Options

- AC Outlet in Platform
- White Noise (squawker) Motion Alarm
- AGM Batteries
- Airline to Platform
- Special Hydraulic Oils
- Accessory Packages
 - Electrician's Package - Plumber's Package
 - JLG® Workstation
 - Panel Carrier Accessory
 - Pipe Rack Accessory
 - Plant Maintenance Package



Dimensions

All dimensions are approximate.

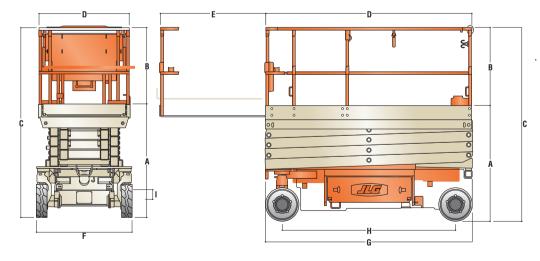

- A. Platform Height-Lowered 1.23 m B. Platform Railing Height 1.14 m C. Overall Height
- Fold Down Rails, Up 2.33 m Rails Folded 1.98 m 0.76 x 2.3 m D. Platform Size
- E. Platform Extension 0.9 m F. Overall Width 81 cm
- G. Overall Length 2.3 m H. Wheelbase 1.88 m I. Ground Clearance

8.8 cm

